


- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- POINT OF MEASUREMENT FOR PLATING THICKNESS
- RETENTION FEATURE ON SOLDER TAILS LOCATED AT MANUFACTURER'S OPTION.
- $\text{ø}.020\text{M}$ FOR KINKED TAILS
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

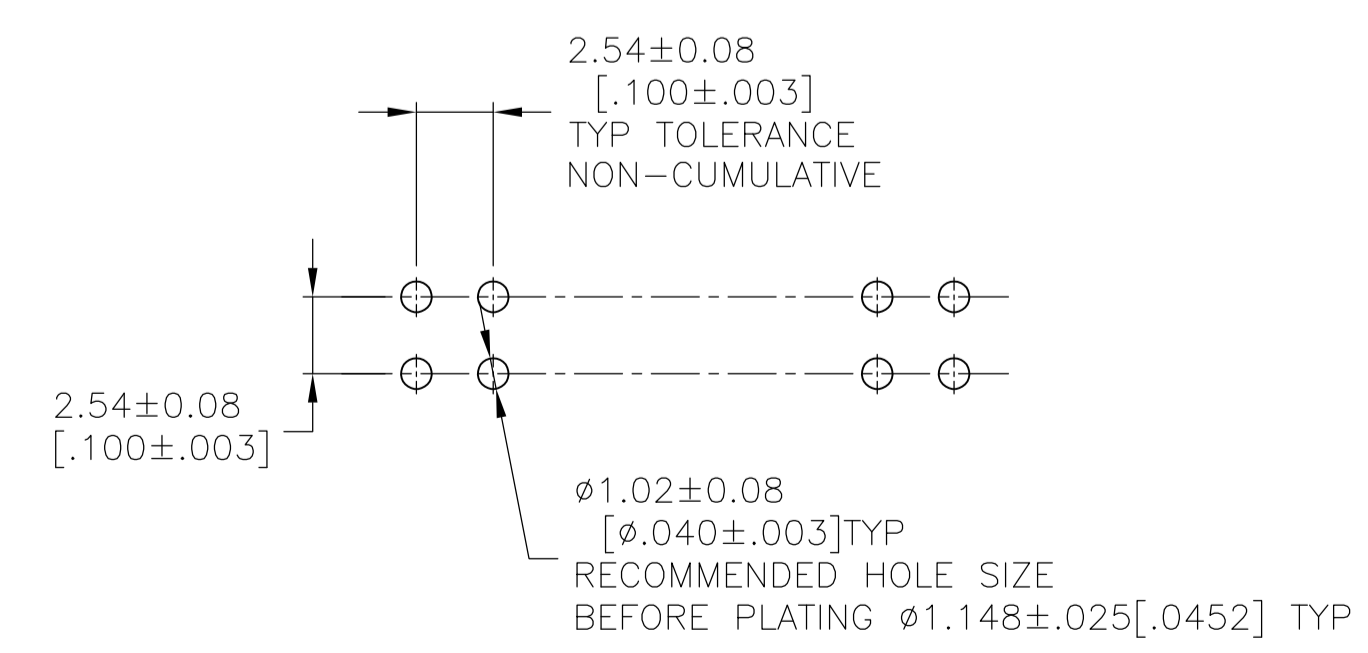

RECOMMENDED HOLE LAYOUT

OBSOLETE	101.19	3.984	99.06	3.900	39	80	4-146145-0
	98.65	3.884	96.52	3.800	38	78	3-146145-9
	96.71	3.784	93.98	3.700	37	76	3-146145-8
	93.57	3.684	91.44	3.600	36	74	3-146145-7
	91.03	3.584	88.90	3.500	35	72	3-146145-6
	88.49	3.484	86.36	3.400	34	70	3-146145-5
	85.95	3.384	83.82	3.300	33	68	3-146145-4
	83.41	3.284	81.28	3.200	32	66	3-146145-3
	80.87	3.184	78.74	3.100	31	64	3-146145-2
	78.33	3.084	76.20	3.000	30	62	3-146145-1
	75.79	2.984	73.66	2.900	29	60	3-146145-0
	73.25	2.884	71.12	2.800	28	58	2-146145-9
	70.71	2.784	68.58	2.700	27	56	2-146145-8
	68.17	2.684	66.04	2.600	26	54	2-146145-7
	65.63	2.584	63.50	2.500	25	52	2-146145-6
	63.09	2.484	60.96	2.400	24	50	2-146145-5
	60.55	2.384	58.42	2.300	23	48	2-146145-4
	58.01	2.284	55.88	2.200	22	46	2-146145-3
	55.47	2.184	53.34	2.100	21	44	2-146145-2
	52.93	2.084	50.80	2.000	20	42	2-146145-1
50.39	1.984	48.26	1.900	19	40	2-146145-0	
47.85	1.884	45.72	1.800	18	38	1-146145-9	
45.31	1.784	43.18	1.700	17	36	1-146145-8	
42.77	1.684	40.64	1.600	16	34	1-146145-7	
40.23	1.584	38.10	1.500	15	32	1-146145-6	
37.69	1.484	35.56	1.400	14	30	1-146145-5	
35.15	1.384	33.02	1.300	13	28	1-146145-4	
32.61	1.284	30.48	1.200	12	26	1-146145-3	
30.07	1.184	27.94	1.100	11	24	1-146145-2	
27.53	1.084	25.40	1.000	10	22	1-146145-1	
24.99	.984	22.86	.900	9	20	1-146145-0	
22.45	.884	20.32	.800	8	18	146145-9	
19.91	.784	17.78	.700	7	16	146145-8	
17.37	.684	15.24	.600	6	14	146145-7	
14.83	.584	12.70	.500	5	12	146145-6	
12.29	.484	10.16	.400	4	10	146145-5	
9.75	.384	7.62	.300	3	8	146145-4	
7.21	.284	5.08	.200	2	6	146145-3	
4.67	.184	2.54	.100	1	4	146145-2	
2.13	.084	-	-	-	2	146145-1	
	C	B	A	NO.OF POSN	PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J KNAUB 7-18-94	 TE Connectivity
DIMENSIONS: mm [INCHES]		CIK G DUBNICZKI 7-18-94	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVO G DUBNICZKI 7-18-94	NAME
0 PLC ± -	1 PLC ± -	2 PLC ± 0.13[.005]	PRODUCT SPEC
3 PLC ± -	4 PLC ± -	ANGLES ± -	APPLICATION SPEC
MATERIAL: HOUSING: FLAME RETARDANT POLYBLENDED COPPER ALLOY	FINISH: 0.00127[.00005] GOLD DUXPLX	WEIGHT: -	SIZE: A1
CUSTOMER DRAWING		SCALE: 4:1	SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)