


CUSTOMER DRAWING

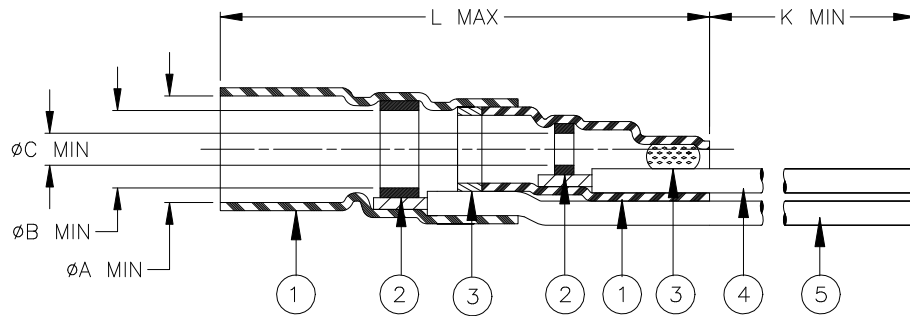


Product Name	Product Dimensions					Cable Dimensions				
	ϕA min	ϕB min	ϕC min	L max	K min	ϕD	ϕE	ϕF min	G ± 0.5 (G ± 0.02)	M ± 0.5 (M ± 0.02)
B-020-42-05	6.30 [.248]	4.60 [.181]	2.80 [.110]	31.00 [1.220]	180.00 [7.087]	2.20 [.087] to 5.70 [.224]	2.10 [.083] to 4.50 [.177]	0.30 [.012]	17.0 [.669]	6.0 [.236]

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL0 per ANSI-J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic.
- CONDUCTOR LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: white.
- GROUND LEAD: Raychem 55A0111-22 in accordance with MIL-W-22759/32 AWG22 stranded tin plated copper.
Color: black.

APPLICATION

- This controlled soldering device is designed for termination of coaxial cables to connectors and printed circuit boards. They will terminate the tin or silver-plated center conductor and the single or double tin or silver-plated copper braid of a coaxial cable having an insulation rated for at least 125°C.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity approved convection or infrared heating tools in accordance with Raychem Installation Procedure RPIP-500-03.

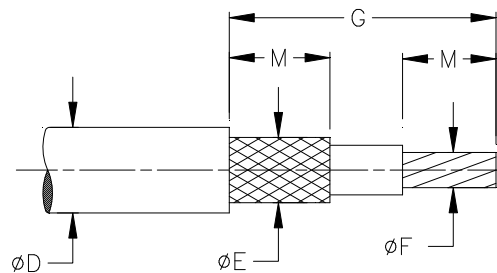

NOTE: For best results, prepare the cable as illustrated above.

		Raychem Devices		TITLE : COAXIAL SOLDER SLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRES		
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN [.xxx] BRACKETS.</small>				DOCUMENT NO.: B-020-42-05		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DOCUMENT REVISION: B	REVISOR ISSUE DATE: 12-MAR-2020	
DRAWN BY: M. FORONDA	DATE: 18-DEC-2000	CAGE CODE: 06090	ECO NUMBER: ECO-20-003669	SCALE: None	SIZE: A	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity manufacturer:

Other Similar products are found below :

[570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1633138-8](#) [D38999/24FJ4AN](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [2EDL4CM](#)
[DTS20W19-11PD-3028](#) [DTS20W19-11PD-3028-LC](#) [DTS20W19-32SD-3028-LC](#) [DTS20W19-32SD-3028](#) [NC6-P104-06](#) [TXR64AB90-](#)
[3616AI](#) [DTS26F21-41HE](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [D38999/24WF32JE](#) [D38999/24WF32SE-LC](#)
[DTS24W19-32HE](#) [D38999/20JB35HA](#) [D38999/24WJ20PA](#) [164-8033-08](#) [D38999/24FF32JE](#) [D38999/24FF32SE-LC](#) [D38999/24WF32JB](#)
[D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [DTS24F19-32HE](#) [DTS20W19-32SA-3028-LC](#) [DTS24F19-](#)
[11SC-3028-LC](#) [DTS24F19-11SC-3028](#) [DJT14E13-98HB](#) [D38999/20WC8BB](#) [1-330599-5](#) [DTS24F21-41HN-LC](#) [DTS24F21-41HN](#)
[DTS24F21-41AN](#) [DTS24F21-39HN](#) [DTS24F21-41PN-LC](#) [AFD50-10-6SN-1A-LC](#) [DJT10F17-26HC](#) [DTS24W19-32HB](#) [ACT20JE99HA](#)
[DJT10E17-26HC](#) [DJT10E17-26HN](#) [DJT10F17-26HA](#)