

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | D9 | REVISED PER ECO-12-012202 | 03JUL12 | KH | MS |







PHYSICAL PROPERTIES:
 HOUSING MATERIAL: PBT
 FLAMMABILITY: UL94V-0
 COLOR: BLACK




















TERMINAL:
 TERMINALS: BRASS, TIN PLATED
 SCREWS: 6-32, STEEL, NICKEL PLATED



MECHANICAL:
 PITCH (TERMINAL SPACING): 9.50mm (.374")
 WIRE RANGE: 12-22 AWG
 RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
 MAXIMUM CURRENT: 20A
 OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
 OPERATING TEMP RANGE: -40°C TO 120°C


-  SCREWS ON ONE SIDE IN WIRE READY POSITION.
-  SEE FIGURE.
-  WHITE INK STAMP.
-  NICKEL PLATED BRASS SCREWS.
-  PRELIMINARY PART NUMBER.
-  TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

| LOC | DIST | P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-------|-------|-----|--------------------------------|----------------------|------------|-------------|
|  | | | | 104.7 112.2 - - 10 4-1546307-7 | | | |
|  | | | | 104.7 112.2 - - 10 4-1546307-6 | | | |
|  | | | | 104.7 112.2 - - 10 4-1546307-5 | | | |
|  | | | | 104.7 112.2 - - 10 3-1546307-3 | | | |
| | | | | 104.7 112.2 - - 10 1-1546307-0 | | | |
|  | | | | 95.2 102.7 - 9 9 5-1546307-0 | | | |
|  | | | | 95.2 102.7 4 9 9 4-1546307-9 | | | |
|  | | | | 95.2 102.7 4 9 9 4-1546307-8 | | | |
| | | | | 95.2 102.7 - - 9 1546307-9 | | | |
| | | | | 85.7 93.2 - - 8 1546307-8 | | | |
| | | | | 76.2 83.7 - - 7 1546307-7 | | | |
|  | | | | 66.7 74.2 - - 6 4-1546307-4 | | | |
| | | | | 66.7 74.2 - - 6 1546307-6 | | | |
|  | | | | 57.2 64.7 - - 5 4-1546307-3 | | | |
|  | | | | 57.2 64.7 - - 5 4-1546307-2 | | | |
|  | | | | 57.2 64.7 - - 5 4-1546307-1 | | | |
|  | | | | 57.2 64.7 - - 5 4-1546307-0 | | | |
|  | | | | 57.2 64.7 - - 5 3-1546307-9 | | | |
| | | | | 57.2 64.7 - - 5 1546307-5 | | | |
|  | | | | 47.7 55.2 - - 4 3-1546307-2 | | | |
| | | | | 47.7 55.2 - - 4 1546307-4 | | | |
|  | | | | 38.2 45.7 - - 3 3-1546307-8 | | | |
|  | | | | 38.2 45.7 - - 3 3-1546307-7 | | | |
|  | | | | 38.2 45.7 - - 3 3-1546307-6 | | | |
|  | | | | 38.2 45.7 - - 3 3-1546307-5 | | | |
|  | | | | 38.2 45.7 - - 3 3-1546307-4 | | | |
| | | | | 38.2 45.7 - - 3 1546307-3 | | | |
| | | | | 28.7 36.2 - - 2 1546307-2 | | | |
| | DIM B | DIM A | | QC TAB .187 45° (2) | QC TAB .187 FLAT (1) | NO OF POSN | PART NUMBER |



| | | | | | | |
|---|--|--------------------------|---|-----------------|----------------------|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN S SCHLEGEL 20AUG2002 |  TE Connectivity | | | |
| | | CHK C RICHARD 8/20/02 | | | | |
| DIMENSIONS: mm  | | APVD C RICHARD 8/20/02 | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2° | | PRODUCT SPEC - | APPLICATION SPEC - | | | |
| MATERIAL - | | WEIGHT - | SIZE A3 | CAGE CODE 00779 | DRAWING NO C-1546307 | RESTRICTED TO - |
| FINISH - | | CUSTOMER DRAWING | | SCALE 1:1 | SHEET 1 OF 3 | REV D9 |

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|-------------|------|-----|------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| - | - | - | - | SEE SHEET 1 | - | - | - |

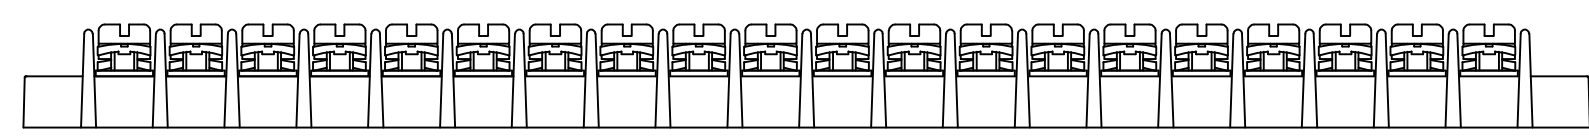






3-1546307-1

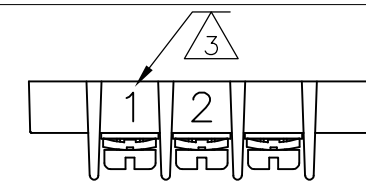



3-1546307-5




3-1546307-2

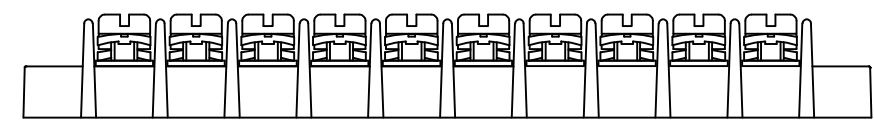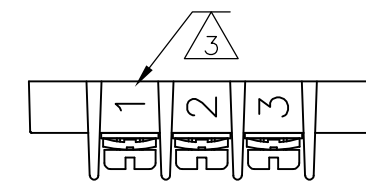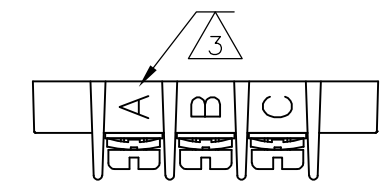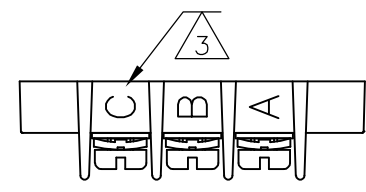


3-1546307-3

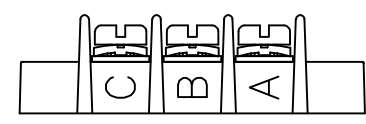



3-1546307-7

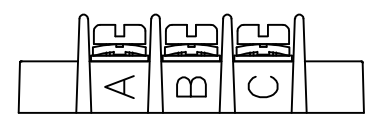

3-1546307-8

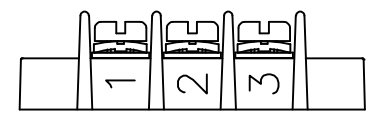

3-1546307-6

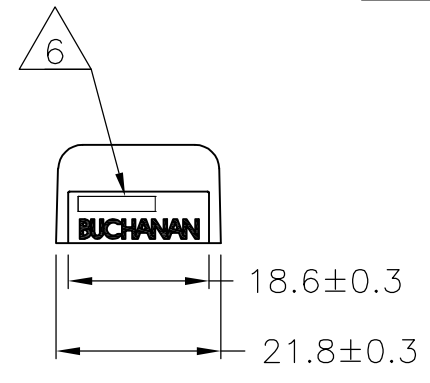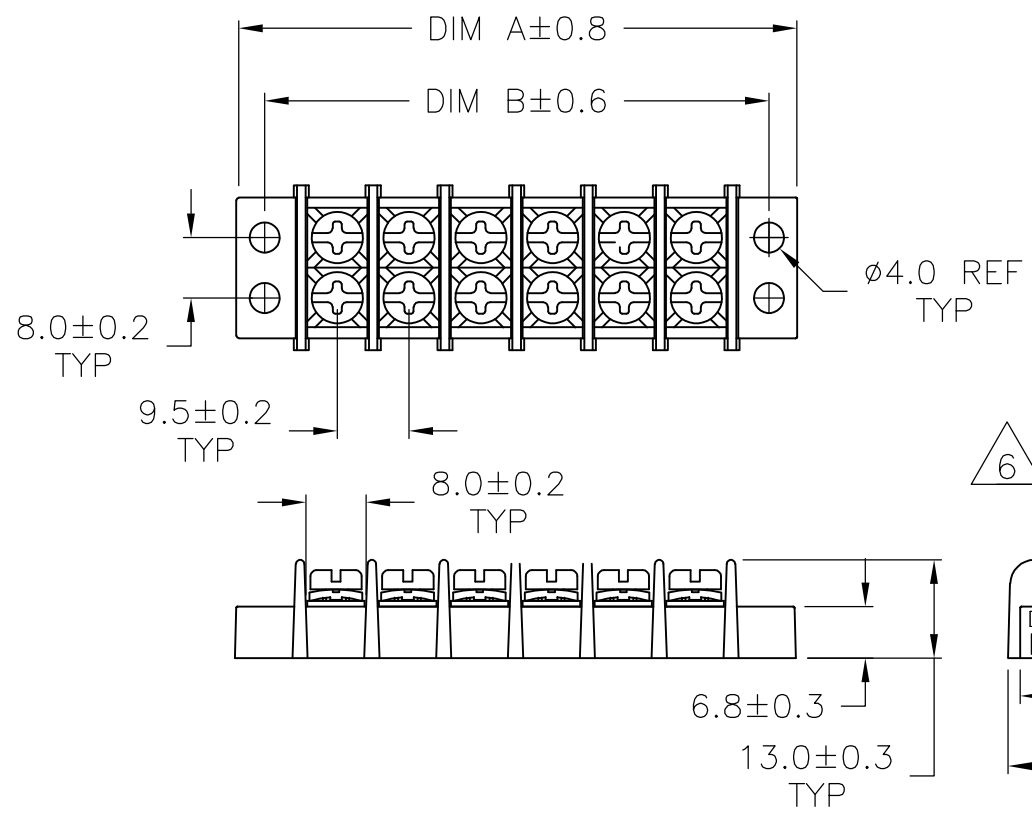

| | | | | | |
|-------|-------|-------------------|--------------------|------------|-------------|
| 294.7 | 302.2 | - | - | 30 | 3-1546307-0 |
| 285.2 | 292.7 | - | - | 29 | 2-1546307-9 |
| 275.7 | 283.2 | - | - | 28 | 2-1546307-8 |
| 266.2 | 273.7 | - | - | 27 | 2-1546307-7 |
| 256.7 | 264.2 | - | - | 26 | 2-1546307-6 |
| 247.2 | 254.7 | - | - | 25 | 2-1546307-5 |
| 237.7 | 245.2 | - | - | 24 | 2-1546307-4 |
| 228.2 | 235.7 | - | - | 23 | 2-1546307-3 |
| 218.7 | 226.2 | - | - | 22 | 2-1546307-2 |
| 209.2 | 216.7 | - | - | 21 | 2-1546307-1 |
| 199.7 | 207.2 | - | - | 20 | 3-1546307-1 |
| 199.7 | 207.2 | - | - | 20 | 2-1546307-0 |
| 190.2 | 197.7 | - | - | 19 | 1-1546307-9 |
| 180.7 | 188.2 | - | - | 18 | 1-1546307-8 |
| 171.2 | 178.7 | - | - | 17 | 1-1546307-7 |
| 161.7 | 169.2 | - | - | 16 | 1-1546307-6 |
| 152.2 | 159.7 | - | - | 15 | 1-1546307-5 |
| 142.7 | 150.2 | - | - | 14 | 1-1546307-4 |
| 133.2 | 140.7 | - | - | 13 | 1-1546307-3 |
| 123.7 | 131.2 | - | - | 12 | 1-1546307-2 |
| 114.2 | 121.7 | - | - | 11 | 1-1546307-1 |
| DIM B | DIM A | QC TAB .187 45° ② | QC TAB .187 FLAT ① | NO OF POSN | PART NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | |
|----------------|--|--------------------------|--|
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: | DWN S SCHLEGEL 20AUG2002 | STE TE Connectivity |
| | 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ANGLES ± 2' | CHK C RICHARD 8/20/02 | |
| MATERIAL - | FINISH - | APVD C RICHARD 8/20/02 | NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER |
| | | PRODUCT SPEC - | SIZE A3 CAGE CODE 00779 DRAWING NO C-1546307 RESTRICTED TO - |
| | | APPLICATION SPEC - | SCALE 1:1 SHEET 2 OF 3 REV D9 |
| | | WEIGHT - | CUSTOMER DRAWING |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC -

DIST -

P

LTR

REVISIONS







DESCRIPTION

DATE

DWN

APVD



SEE SHEET 1

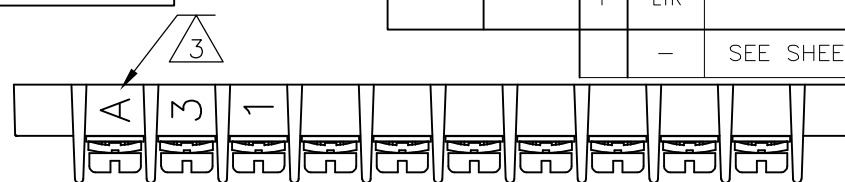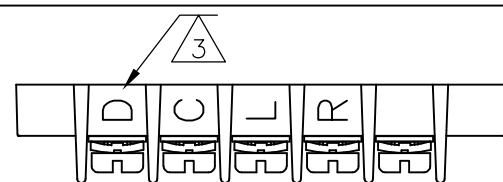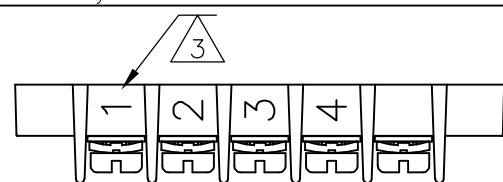



4-1546307-2

4-1546307-3

4-1546307-7

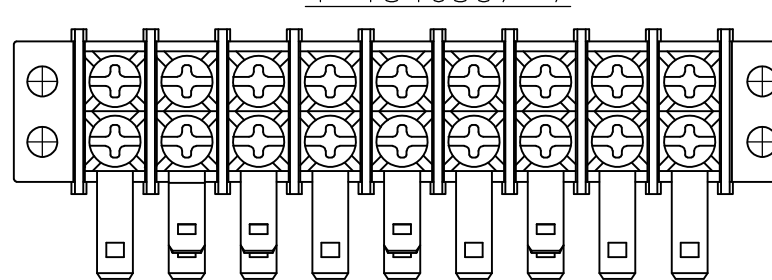
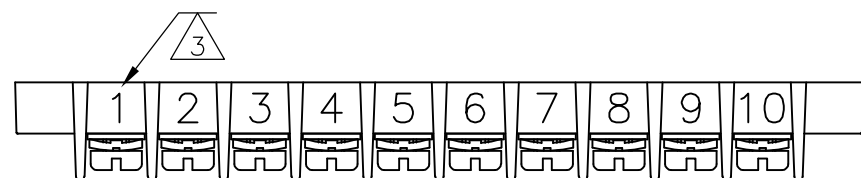


4-1546307-6

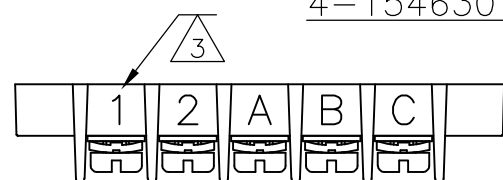

4-1546307-0


4-1546307-8

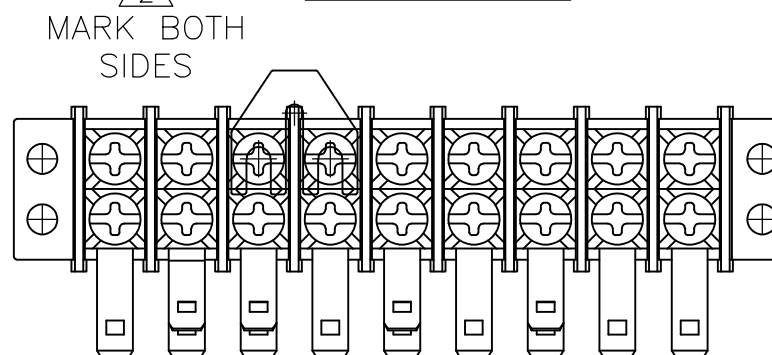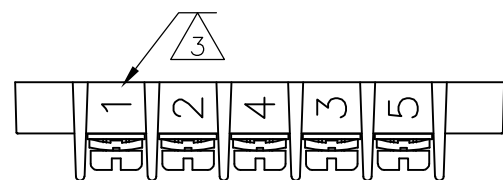

4-1546307-1




MARK BOTH SIDES

4-1546307-9

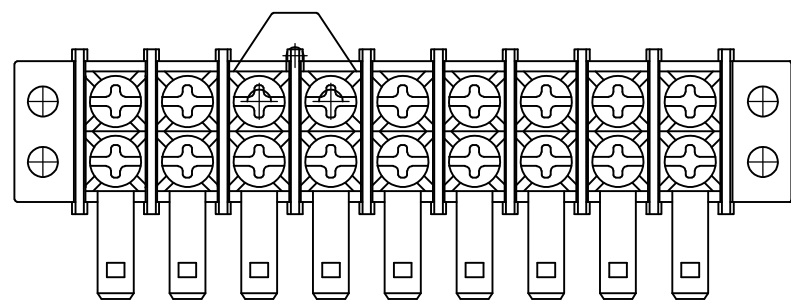

5-1546307-0

MARK BOTH SIDES

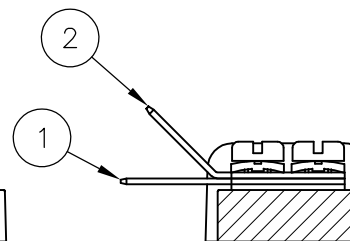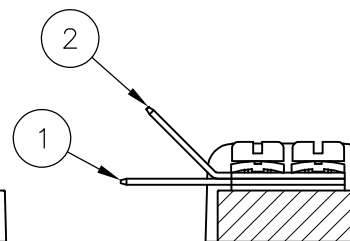

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S SCHLEGEL 20AUG2002

CHK C RICHARD 8/20/02

APVD C RICHARD 8/20/02

PRODUCT SPEC

APPLICATION SPEC

WEIGHT -

CUSTOMER DRAWING

STE TE Connectivity


9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER

SIZE A3 CAGE CODE 00779 DRAWING NO C-1546307 RESTRICTED TO -

SCALE 1:1 SHEET 3 OF 3 REV D9

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

- 0 PLC ± -
- 1 PLC ± 0.3
- 2 PLC ± 0.25
- 3 PLC ± -
- 4 PLC ± -
- ANGLES ± 2'
- FINISH -

MATERIAL -

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Barrier Terminal Blocks](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CR151D20104](#) [670A-RZ-15-KT20](#) [6C1N03](#) [6PCR-02](#) [6PCR-02-008](#) [6PCR-05-008](#) [6PCR-08-008](#) [6PCR-09-008](#) [6PCR-13-006](#) [6PCR-15-006](#) [6PCR-21-006](#) [6PCV-06-008](#) [6PCV-06-716](#) [6PCV-09-001](#) [6PCV-10-009](#) [6PCV-15-008](#) [6PCV-17-1206](#) [6PCV-20-323](#) [6PCV-30-006](#) [6STR-06-006](#) [6STR-08-006](#) [6STR-12-008](#) [6STR-13-006](#) [6STR-14-008](#) [6STR-16-008](#) [6STR-17-008](#) [6STR-21-008](#) [6STR-25-008](#) [6STR-27-008](#) [6STV-03-006](#) [6STV-03-008](#) [6STV-04-006](#) [6STV-09-006](#) [6STV-10-006](#) [6WWR-03-693](#) [6WWV-12-008](#) [6WWV-16-008](#) [72212603](#) [72504-C-50](#) [72506-C](#) [72507-C-50](#) [73203](#) [75505-C](#) [75505-C-50](#) [75510-C](#) [77010-50](#) [7C1N08](#) [812-GP-3/4ST-09](#) [8-1437402-5](#) [8-1437402-7](#)