SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED DR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZEO: UL 1283 CSA CERTIFIED: CSA 22.2, # 0,0.4,8 VDE APPROVED: EN 133 200

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

9.6 μA @ 120V 50Hz 16.6 µA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED EURRENT, Ir.

IN AN AMBIENT, To, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Io, IS AS FOLLOWS: 100 - To $I_0 = I_r$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONDS

CUSTOMER DRAWING CATALOG #15SRBS8-R ECN # LAPPRVO. DATE PJD

08NDV07

07-026555

TEST SPECIFICATIONS:

INDUCTANCE: N/A mH CAPACITANCE: (MEASURED @ IKHz, 0.250VAC MAX., 25°C±1°C)

N/A

LINE TO GROUND: LINE TO LINE: 100pF ± 20% N/A

DISCHARGE RESISTOR: L/G AND L/L I.R.

NO DISCHARGE RESISTOR:

6000M₁ (MIN.) @ 100VDE,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE 1450 VDC FOR 1 MINUTE LINE TO LINE:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

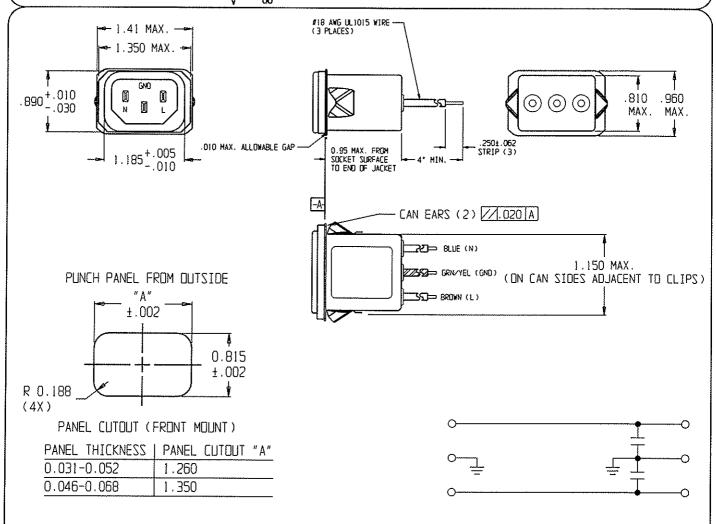

50A- 50A(MINIMUM) INSERTION LOSS						22	THIRD ANGLE	
FREBUENCY MHz	1.0	5.0	10	50	100	300	PROJECTION UNLESS OTHERWISE SPECIFIED,	Tyco Electronics CDR(DH PRODUCTS, 650 S. BUTTESFIELD RD. HANGELEIN IL 60060
COMMON dB	/	/	/	3	δ	22	TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED	POWER LINE FILTER
DIFF.	/	/	/	1	/		THIS IMPORATION IS COMPLEMENTAL AND PROPRIETARY TO TYPE DESCRIPTIONS CORPORATION AND TIS MORTINITIES SUBSIDIARIES AND APPLICATES. IT MAY NOT BE DISCLOSED TO AMONE SHERE THAN TYPE DESCRIPTIONS PRESIDED, WITHOUT WRITTEN AUTHORIZATION FROM TYPE DESCRIPTIONS OF SPECIAL PROPRIETARY OF THE FROM TYPE DESCRIPTION OF THE PROPRIETARY OF THE THEORYSISSIES, PROMITY WANTE OF THE THEORYSISSIES, PROMITY WANTE OF THE THEORYSISSIES, PROMITY WANTE OF THE THEORYSISSIES, PROMITY WANTE OF THE THEORYSISSIES, OF PROMITY WANTE OF THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THEORY OF THE THEORY OF THE THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THE THEORY OF THE THE THE THE THE THE THE THE	TYCD ELECTRONICS PART NUMBER: 2-6609987-9 SCALE: .75: DATE: DATE: CATALOG NO. REV. DRW. BY: CO DRIG: P.D. 15SRBS8-R 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for AC Power Entry Modules category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

0098.0050 6167.0002 6609100-2 7-6609955-2 FKI2-50-6/M5 FN361-6-06 FN389-4-22 FN9226B-6-02 FN9233S1-10-06 FN9233S1-8-06 FN9233S1B-8-06 FN9233S1R-12-06 FN9233SB-12-06 FN9233SB-12-06 FN9233SB-8-06 FN9233SR-10-06 FN9244B-15-06HI FN9244EB-3-06 FN9244EB-8-06 FN9244ER-15-06 FN9244ER-8-06 FN9244ES1-8-06 FN9244ESB-8-06 FN9244ES-8-06 FN9244ESB-8-06 FN924ESB-8-06 FN924ESB-