REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	T2	ECO-18-000875	24APR2018	RS	SG

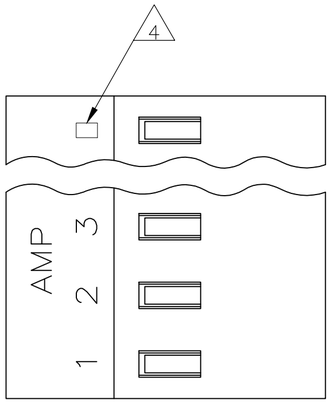

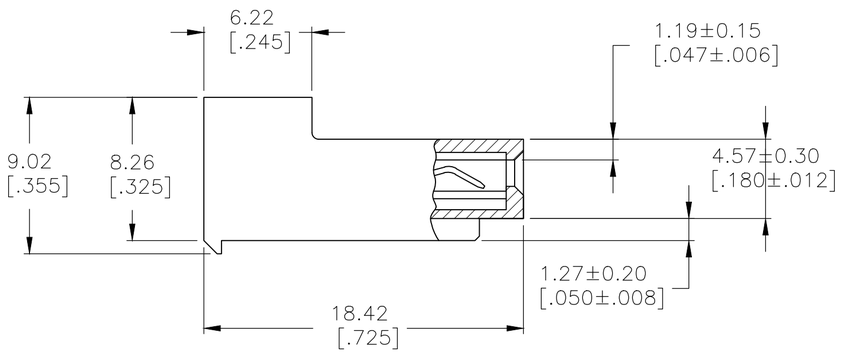

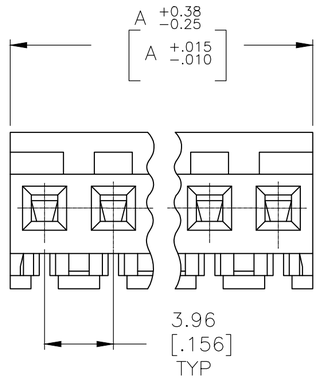

1. MATERIAL: CONNECTOR – NYLON UL94-V2 (RED).
   CONTACTS – 0.30[.012] THICK COPPER ALLOY
   (BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
   FOR CONTACTS 640433-2 THRU 2-640433-4).
   (MATTE WHSIKER MITIGATED TIN 0.00203[.000080]
   MIN. THICKNESS OVER NICKEL UNDERPLATE FOR
   3-640433-2 THRU 5-640433-4).
2. CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
3. CONTACTS MUST ACCEPT 1.14±0.03[.045] POST AND REMAIN LOCKED IN POSITION.
4. IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.
7. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	DIM A	NO. OF CIRCUITS	PART NO.
	95.10[3.744]	24	5-640433-4
	91.13[3.588]	23	5-640433-3
	87.17[3.432]	22	5-640433-2
	83.21[3.276]	21	5-640433-1
	79.25[3.120]	20	5-640433-0
	75.29[2.964]	19	4-640433-9
	71.32[2.808]	18	4-640433-8
	67.36[2.652]	17	4-640433-7
	63.40[2.496]	16	4-640433-6
	59.44[2.340]	15	4-640433-5
	55.47[2.184]	14	4-640433-4
	51.51[2.028]	13	4-640433-3
	47.55[1.872]	12	4-640433-2
	43.59[1.716]	11	4-640433-1
	39.62[1.560]	10	4-640433-0
	35.66[1.404]	9	3-640433-9
	31.70[1.248]	8	3-640433-8
	27.74[1.092]	7	3-640433-7
	23.77[.936]	6	3-640433-6
	19.81[.780]	5	3-640433-5
	15.85[.624]	4	3-640433-4
	11.89[.468]	3	3-640433-3
	7.92[.312]	2	3-640433-2
SUPERSEDED	95.10[3.744]	24	2-640433-4
SUPERSEDED	91.13[3.588]	23	~~2-640433-3~~
SUPERSEDED	87.17[3.432]	22	~~2-640433-2~~
SUPERSEDED 7	83.21[3.276]	21	~~2-640433-1~~
SUPERSEDED	79.25[3.120]	20	1-640433-0
SUPERSEDED	75.29[2.964]	19	1-640433-9
7 SUPERSEDED	71.32[2.808]	18	~~1-640433-8~~
SUPERSEDED	67.36[2.652]	17	1-640433-7
SUPERSEDED	63.40[2.496]	16	1-640433-6
SUPERSEDED	59.44[2.340]	15	1-640433-5
7 SUPERSEDED	55.47[2.184]	14	~~1-640433-4~~
SUPERSEDED	51.51[2.028]	13	1-640433-3
SUPERSEDED	47.55[1.872]	12	~~1-640433-2~~
7 SUPERSEDED	43.59[1.716]	11	~~1-640433-1~~
SUPERSEDED	39.62[1.560]	10	1-640433-0
SUPERSEDED	35.66[1.404]	9	640433-9
SUPERSEDED	31.70[1.248]	8	640433-8
SUPERSEDED	27.74[1.092]	7	640433-7
SUPERSEDED	23.77[.936]	6	640433-6
SUPERSEDED	19.81[.780]	5	640433-5
SUPERSEDED	15.85[.624]	4	640433-4
SUPERSEDED	11.89[.468]	3	640433-3
SUPERSEDED	7.92[.312]	2	640433-2

640433

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.13 [.005]
4 PLC ± -
ANGLES ± -

MATERIAL 1
FINISH 1

METRIC

DWN	S. CARPENTER	13AUG2003
CHK	D. BOSSI	13AUG2003
APVD	D. BOSSI	13AUG2003
PRODUCT SPEC	108-1051	
APPLICATION SPEC	114-1020	
WEIGHT	0.000000	

TE Connectivity Ltd.

NAME: MTA 156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-640433	-

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV T2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity ***manufacturer:***

Other Similar products are found below :

570416-000 CLTEQ-M81CE-SSRELAY-4-20V 4-1633138-8 D38999/24FJ4AN 358838-000 4-1195131-0 650069-000 SMD100-2 2EDL4CM DTS20W19-11PD-3028 DTS20W19-11PD-3028-LC DTS20W19-32SD-3028-LC DTS20W19-32SD-3028 NC6-P104-06 TXR64AB90-3616AI DTS26F21-41HE DTS26F21-41AE DTS26F21-41PE-LC DTS26F21-11SE-3028-LC 5-2027513-8 D38999/20JB35HA D38999/24WJ20PA 164-8033-08 D38999/24WG11HA D38999/24WG11HN MS27467T21F11H DJT16E21-11HA 1-532955-3 DTS20W19-32SA-3028-LC DTS24F19-11SC-3028-LC DTS24F19-11SC-3028 D38999/20WC8BB 1-330599-5 DTS24F21-41HN-LC DTS24F21-41HN DTS24F21-41AN DTS24F21-39HN DTS24F21-41PN-LC AFD50-10-6SN-1A-LC DBAS 70-7-0 SN 090-1A SCC ACT20JE99HA DJT16F17-26HB MS27467T21F35J MS27467T21F11J MS27467T21F16H-LC MS27467T21F35H MS27467T21F41H-LC DJT16E21-11PA-LC DJT16E21-11HA-LC DJT16E21-11AA