
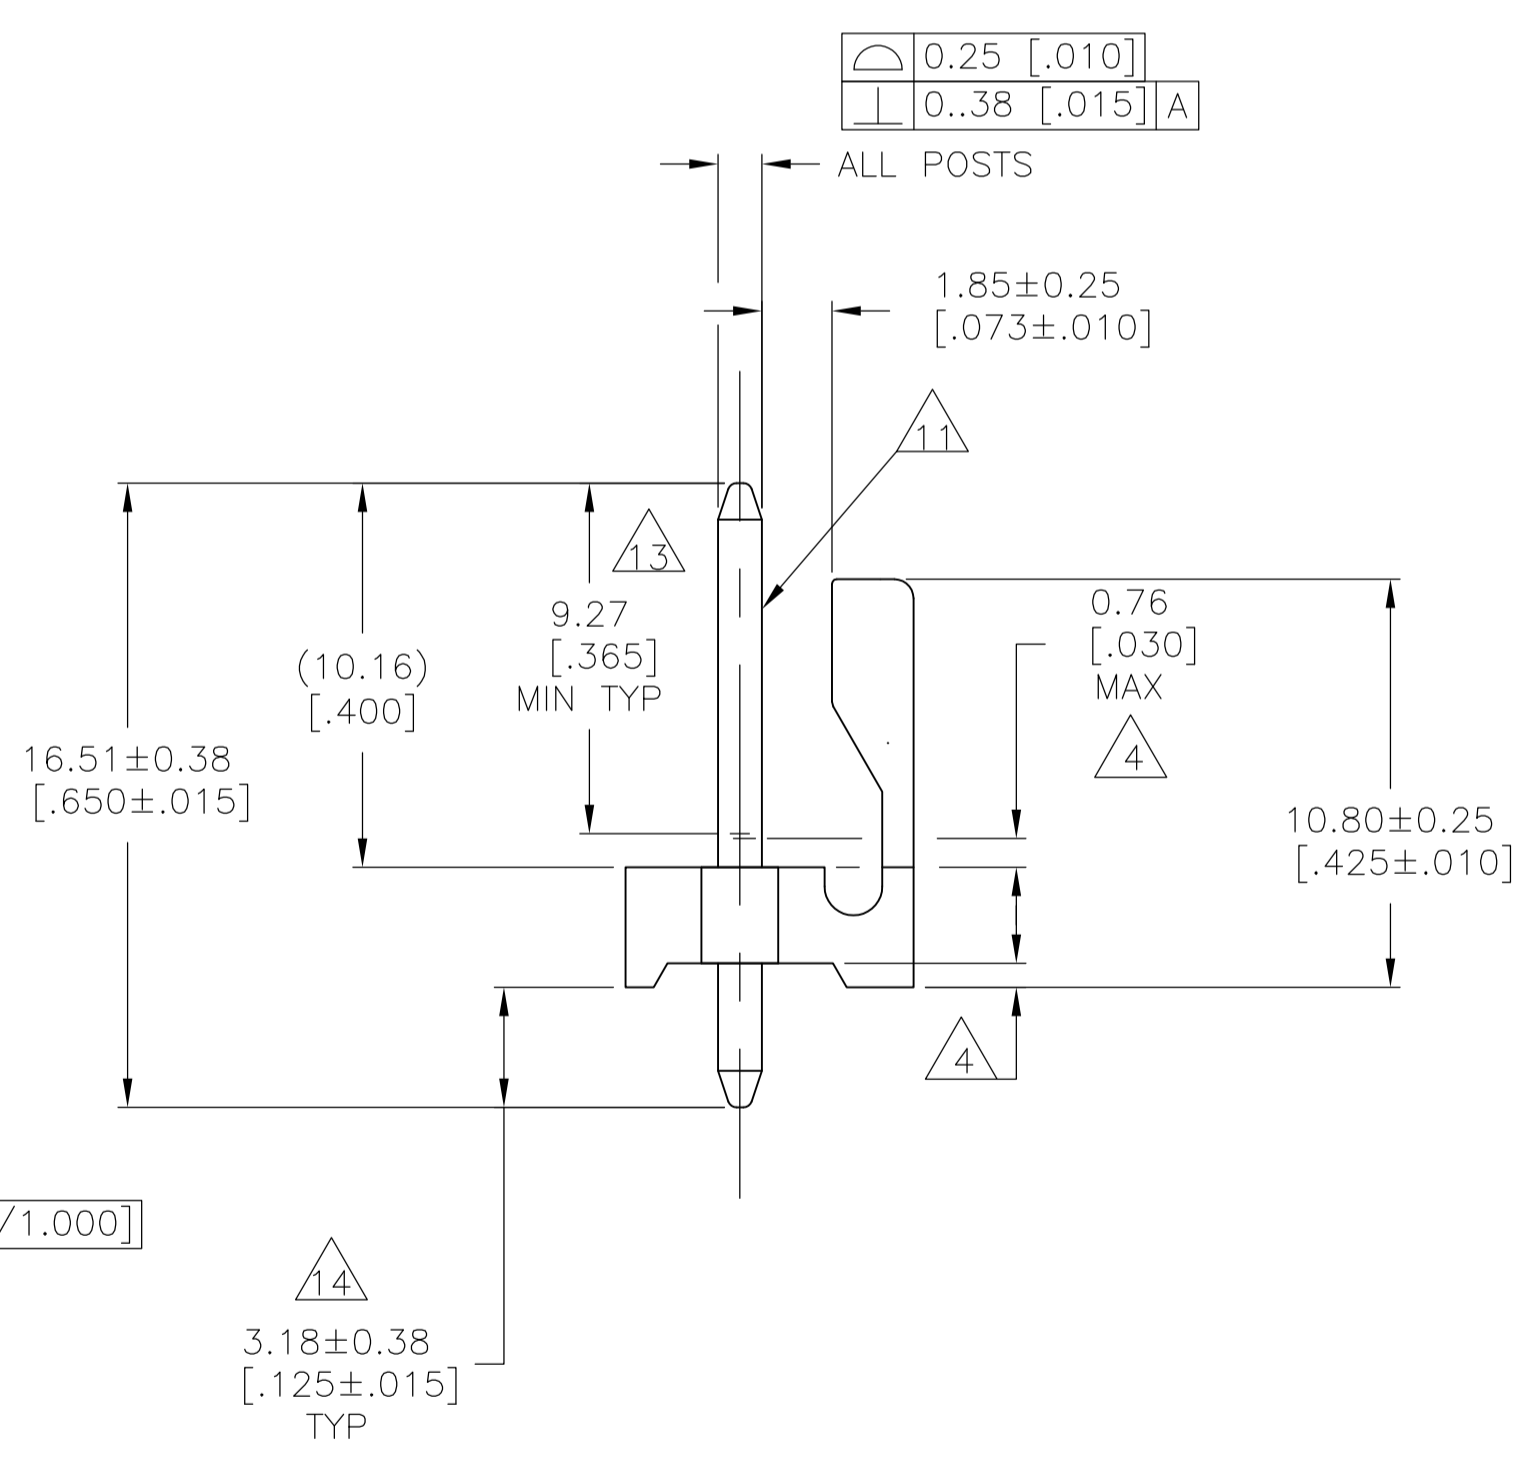


- 1 POST TO WITHSTAND 13 NEWTONS (3 LBS) MINIMUM AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- 2 TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- 3 MEASURED AT SURFACE -A-
- 4 PLASTIC FLASH PERMITTED IN THIS AREA.
- 5 PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- 6 ONE HOLE MAY BE UNDERSIZED 1.65/1.52 [.065/.060] DIA. FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- 7 MATERIAL: HEADER-THERMOPLASTIC POLYESTER GLASS-FILLED 94V-0 (NATURAL) POST-COPPER ALLOY (SEE NOTES 13 & 14 FOR PLATING)
- 8 COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- 9 PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- 10 POST TO BE MEASURED WHEN STRIP IS HELD FLAT.
- 11 POST MUST WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- 12 DIMENSION SHOULD BE 4.45 [.175] MIN WHEN MATING WITH A MTA-156 CONNECTOR ASSEMBLY OR A SL-156 CONNECTOR ASSEMBLY.
- 13 PLATING: GOLD PLATE AREA, 0.00038 [.000015] GOLD OR 0.00008 [.000003] MIN GOLD FLASH OVER 0.00030 [.000012] PALLADIUM NICKEL, PER TE CONNECTIVITY'S DISCRETION, ALL SIDES, OVER NICKEL UNDERPLATE, 0.00127 [.000050] MIN, ALL SIDES AND ENTIRE LENGTH OF POST.
- 14 PLATING: BRIGHT TIN/LEAD (93/7) PLATE AREA, 0.00381-0.00889 [.000150-.000350] THICK, ALL FOUR SIDES 3.18 [.125] MINIMUM FOR -2 THRU -24. MATTE TIN PLATE AREA 0.00381-0.00889 [.000150-.000350] THICK ALL FOUR SIDES, 3.18 [.125] FOR -32 THRU -54.
- 15 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 16 OBSOLETE PART NUMBER

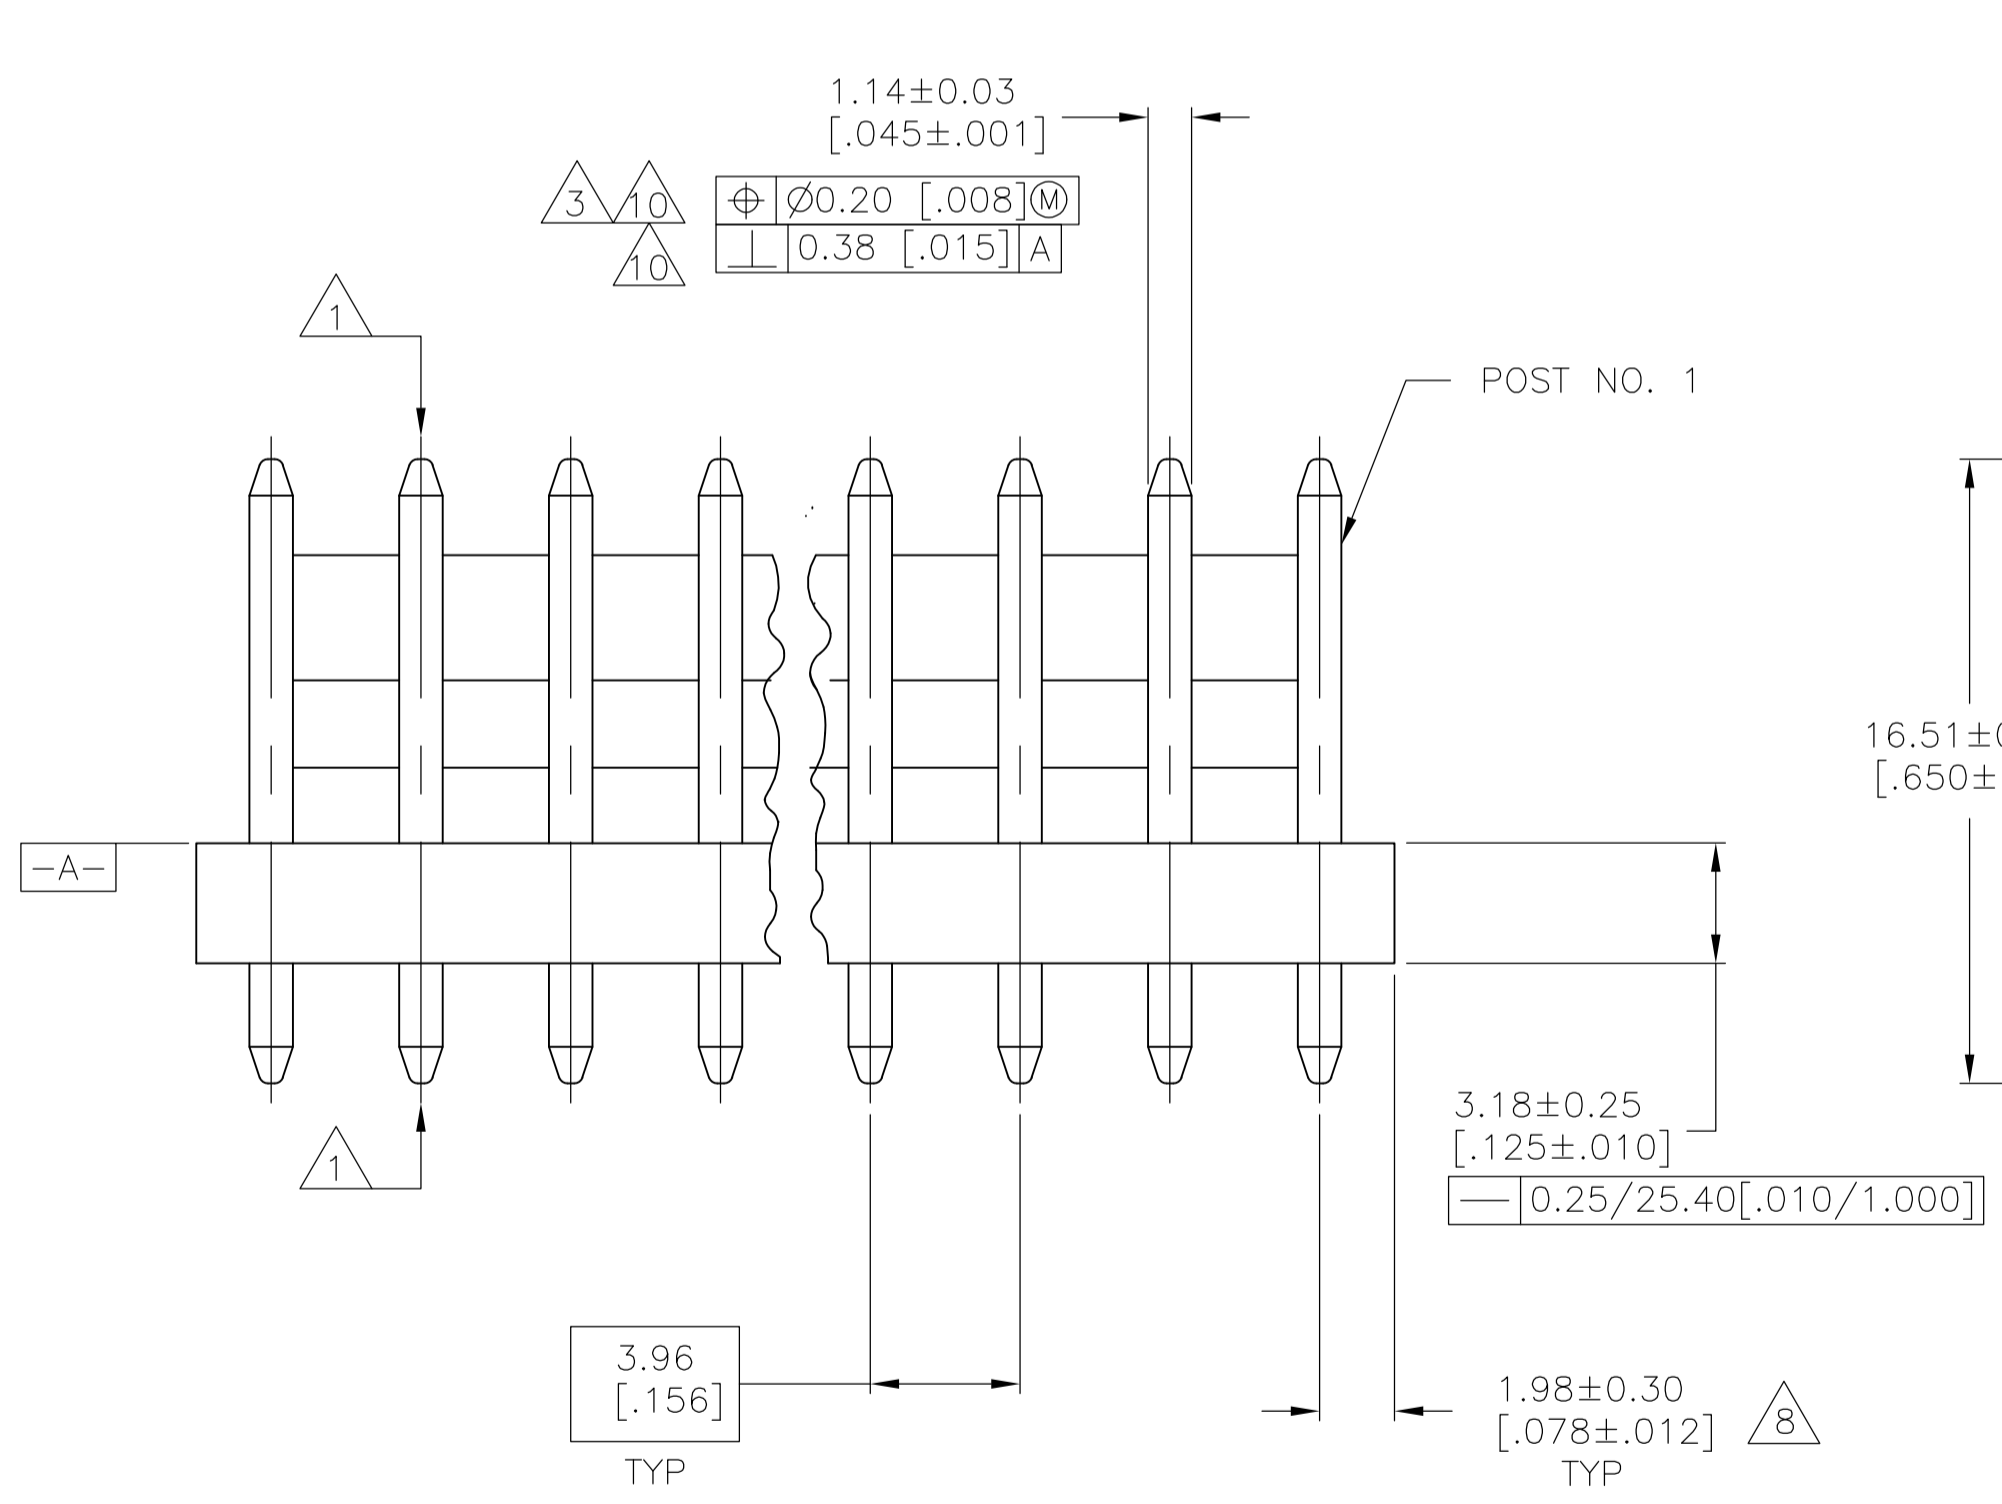

| DIM (L) | NO.OF POSN | ASSEMBLY |
|---------------|------------|------------|
| 95.10 [3.744] | 24 | 5-641120-4 |
| 91.14 [3.588] | 23 | 5-641120-3 |
| 87.17 [3.432] | 22 | 5-641120-2 |
| 83.21 [3.276] | 21 | 5-641120-1 |
| 79.25 [3.120] | 20 | 5-641120-0 |
| 75.29 [2.964] | 19 | 4-641120-9 |
| 71.32 [2.808] | 18 | 4-641120-8 |
| 67.36 [2.652] | 17 | 4-641120-7 |
| 63.40 [2.496] | 16 | 4-641120-6 |
| 59.44 [2.340] | 15 | 4-641120-5 |
| 55.47 [2.184] | 14 | 4-641120-4 |
| 51.51 [2.028] | 13 | 4-641120-3 |
| 47.55 [1.872] | 12 | 4-641120-2 |
| 43.59 [1.716] | 11 | 4-641120-1 |
| 39.62 [1.560] | 10 | 4-641120-0 |
| 35.66 [1.404] | 9 | 3-641120-9 |
| 31.70 [1.248] | 8 | 3-641120-8 |
| 27.74 [1.092] | 7 | 3-641120-7 |
| 23.77 [.936] | 6 | 3-641120-6 |
| 19.81 [.780] | 5 | 3-641120-5 |
| 15.85 [.624] | 4 | 3-641120-4 |
| 11.89 [.468] | 3 | 3-641120-3 |
| 7.92 [.312] | 2 | 3-641120-2 |
| DIM (L) | NO.OF POSN | ASSEMBLY |

| DIM (L) | NO.OF POSN | ASSEMBLY |
|---------------|------------|------------|
| 95.10 [3.744] | 24 | 2-641120-4 |
| 91.14 [3.588] | 23 | 2-641120-3 |
| 87.17 [3.432] | 22 | 2-641120-2 |
| 83.21 [3.276] | 21 | 2-641120-1 |
| 79.25 [3.120] | 20 | 2-641120-0 |
| 75.29 [2.964] | 19 | 1-641120-9 |
| 71.32 [2.808] | 18 | 1-641120-8 |
| 67.36 [2.652] | 17 | 1-641120-7 |
| 63.40 [2.496] | 16 | 1-641120-6 |
| 59.44 [2.340] | 15 | 1-641120-5 |
| 55.47 [2.184] | 14 | 1-641120-4 |
| 51.51 [2.028] | 13 | 1-641120-3 |
| 47.55 [1.872] | 12 | 1-641120-2 |
| 43.59 [1.716] | 11 | 1-641120-1 |
| 39.62 [1.560] | 10 | 1-641120-0 |
| 35.66 [1.404] | 9 | 641120-9 |
| 31.70 [1.248] | 8 | 641120-8 |
| 27.74 [1.092] | 7 | 641120-7 |
| 23.77 [.936] | 6 | 641120-6 |
| 19.81 [.780] | 5 | 641120-5 |
| 15.85 [.624] | 4 | 641120-4 |
| 11.89 [.468] | 3 | 641120-3 |
| 7.92 [.312] | 2 | 641120-2 |
| DIM (L) | NO.OF POSN | ASSEMBLY |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN S: HOOVER 07NOV02
 CHK: D. ROSSI 07NOV02
 APVD: D. ROSSI 07NOV02

TE Connectivity

MTA-156 HEADER ASSEMBLY, FRICTION LOCK, STRAIGHT, .045 ROUND POST, .000015 GOLD

PRODUCT SPEC

APPLICATION SPEC

SIZE: A1 CAGE CODE: 00779 DRAWING NO: 641120

WEIGHT: -

CUSTOMER DRAWING SCALE: 5:1 SHEET: 1 OF 1 REV: AJ1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)