


AMP Signal Double Lock

TE Internal #: 1743490-1 AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Headers & Receptacles

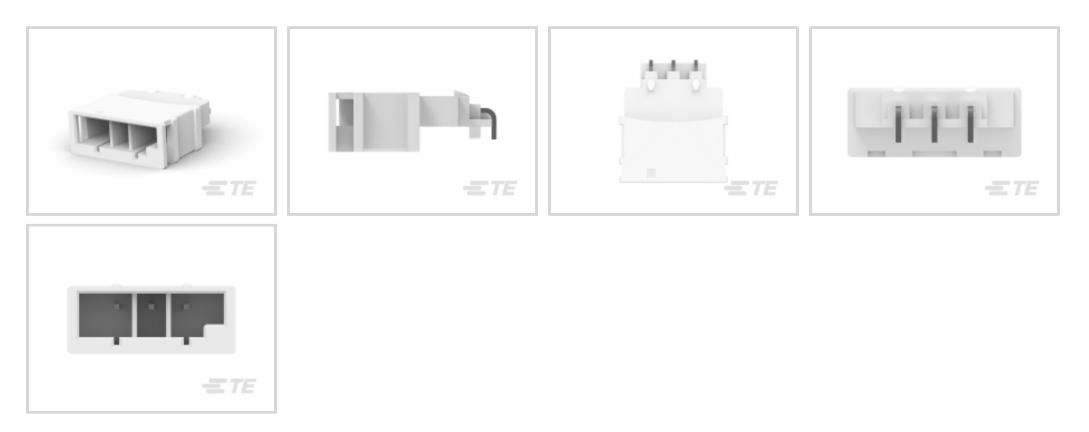

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Right Angle

Connector System: Wire-to-Board

Number of Positions: 3

Centerline (Pitch): 4.1 mm [.161 in]

Features



Product Type Features

PCB Connector Assembly Type	PCB Mount Header	
Connector System	Wire-to-Board	
Header Type	Fully Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
Configuration Features		
PCB Mount Orientation	Right Angle	
Number of Positions	3	
Number of Rows	1	
Contact Features		
Mating Square Post Dimension	.64 mm[.025 in]	
Contact Retention Within Housing	Without	
Contact Mating Area Plating Material	Tin	
Contact Mating Area Plating Material Finish	Bright	

AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color



Contact Mating Area Plating Material Thickness	2 µm	
Contact Type	Pin	
Contact Current Rating (Max)	2.5 A	
Termination Features		
Square Termination Post & Tail Dimension	.64 mm[.025 in]	
Termination Method to Wire & Cable	Solder	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
PCB Mount Alignment Type	Locating Posts	
PCB Mount Alignment	With	
Mating Retention	Without	
PCB Mount Retention	Without	
Connector Mounting Type	Board Mount	
Housing Features		
Centerline (Pitch)	4.1 mm[.161 in]	
Housing Color	Natural	
Housing Material	6/6 Nylon GF	

Dimensions

Connector Length	43.24 mm[1.702 in]	
PCB Thickness (Recommended)	1.6 mm[.063 in]	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Circuit Application	Signal	
Industry Standards		
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Method	Loose Piece	

Product Compliance

For compliance documentation, visit the product page on TE.com>

AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color






Also in the Series | AMP Signal Double Lock

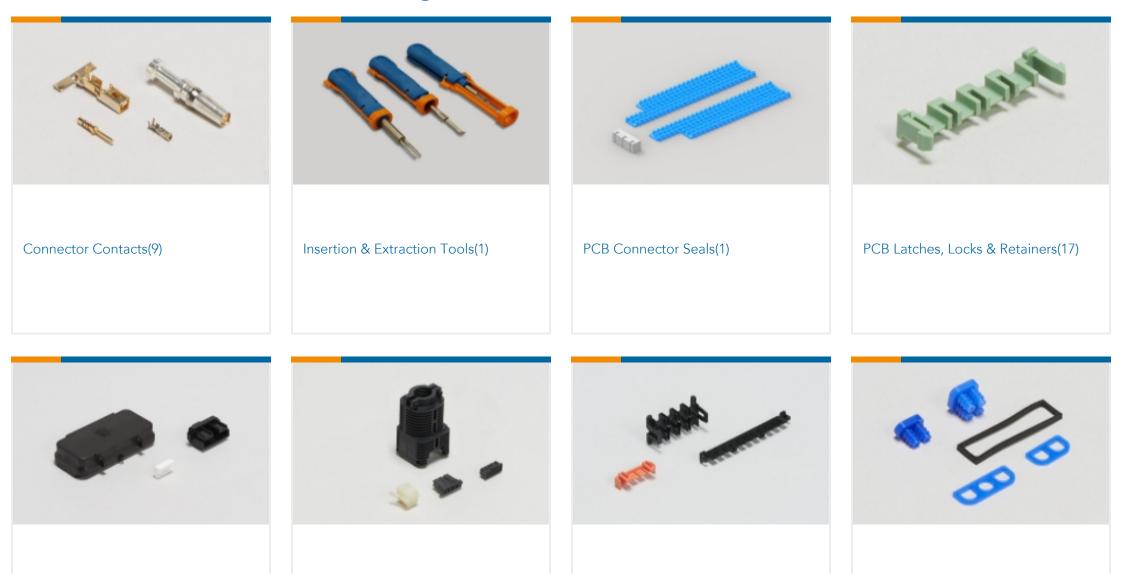

Rectangular Caps & Covers(1)	Rectangular Connector Housings(23)	Rectangular Connector Locking(2)	Rectangular Connector Seals(10)
			the the second
Rectangular Power Connectors(3)	Standard Rectangular Connectors(1)	Wire-to-Board Connector Assemblies & Housings(74)	Wire-to-Board Connector Contacts(6)

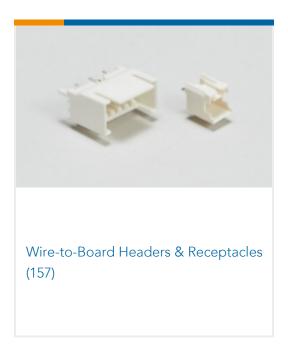

Customers Also Bought

C For support call+1 800 522 6752

AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color





TE Part #1743457-1 PL 250 REC 18-14 AWG 0.4 X 19.0 PTBR

Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1743490-1_C_c-1743490-1-c.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1743490-1_C_c-1743490-1-c.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1743490-1_C_c-1743490-1-c.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Conditions of 2.5mm Signal Double Lock Contacts

AMP Signal Double Lock, PCB Mount Header, Right Angle, Wire-to-Board, 3 Position, 4.1mm [.161in] Centerline, 1 Row, Tin, Natural Housing Color



English

Product Environmental Compliance Product Compliance

English

Product Compliance

English

Agency Approvals Agency Approval Document

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power to the Board category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

6450171-4 6450552-7 6600323-8 6643429-1 6646040-2 6651939-1 6766604-1 120959-1 1393557-2 1393532-2 1393532-3 1393532-4 1393557-1 1600812-5 1-6450861-2 1744132-7 1761122-1 1766250-1 1892109-1 2-6450860-5 2-6450870-0 1-6450161-4 1-6450850-6 1-6450869-6 1645526-2 1-6600130-0 2005243-2 377-0020-11130 TE34-12-16P-F0 51700-10201602AALF 5-6450830-6 5646956-4 377-0080-11131A 4-6450830-9 4-6600333-3 10125416-4050LF 10130248-005LF 6600320-3 3-6450860-5 1888123-2 6450166-1 6643978-1 6766605-1 701-15-02109 N11444 6651938-1 6450810-7 46437-1112 1-1589677-8 5646956-5