


NOTES:  
 1 .000030 GOLD ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .000050 NICKEL  
 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

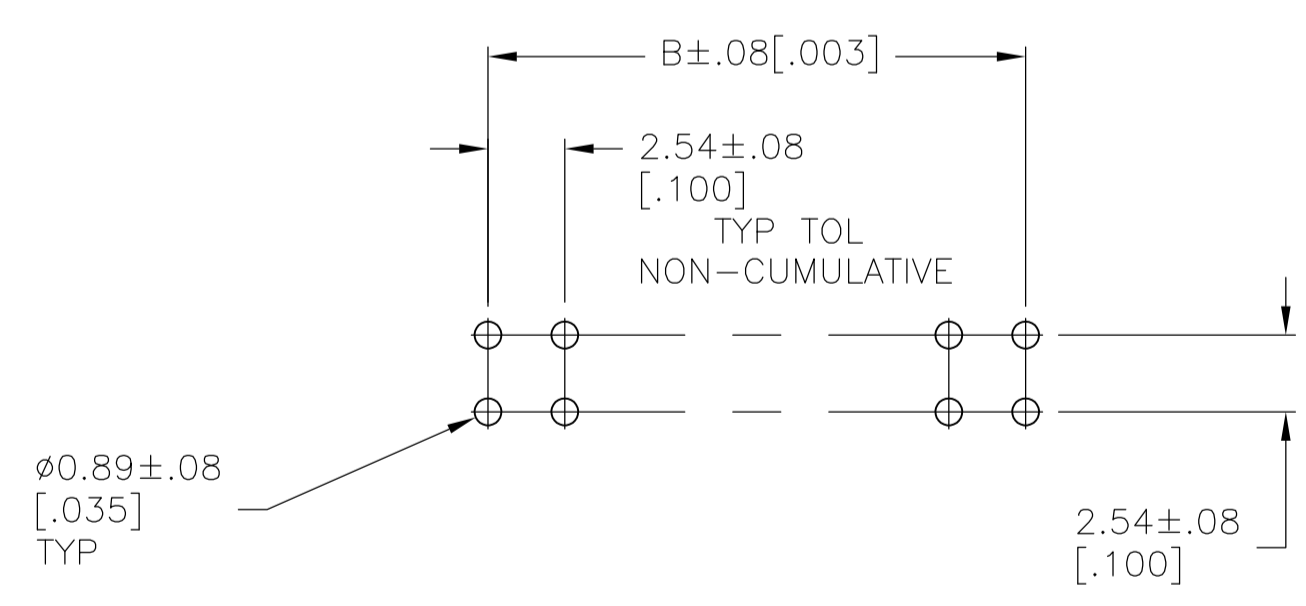

RECOMMENDED BOARD LAYOUT

2	1,3,6,8,9	1,3,6,7,14	2.79 [.110]	55.47 [2.184]	53.34 [2.100]	21	44	4-86479-9
	1,3,6,8,9	15,18,20,2						
OBSOLETE	1,9,15	3,11,17	2.79 [.110]	93.57 [3.684]	91.44 [3.600]	36	74	4-86479-6
OBSOLETE	22,24,29,35							
	3	4	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	4-86479-5
	NONE	NONE	2.79 [.110]	101.19 [3.984]	99.06 [3.900]	39	80	4-86479-4
	NONE	NONE	2.79 [.110]	98.65 [3.884]	96.52 [3.800]	38	78	4-86479-3
	NONE	NONE	2.79 [.110]	96.11 [3.784]	93.98 [3.700]	37	76	4-86479-2
	NONE	NONE	2.79 [.110]	93.57 [3.684]	91.44 [3.600]	36	74	4-86479-1
	NONE	NONE	2.79 [.110]	91.03 [3.584]	88.90 [3.500]	35	72	4-86479-0
	NONE	NONE	2.79 [.110]	88.49 [3.484]	86.36 [3.400]	34	70	3-86479-9
	NONE	NONE	2.79 [.110]	85.95 [3.384]	83.82 [3.300]	33	68	3-86479-8
	NONE	NONE	2.79 [.110]	83.41 [3.284]	81.28 [3.200]	32	66	3-86479-7
	NONE	NONE	2.79 [.110]	80.87 [3.184]	78.74 [3.100]	31	64	3-86479-6
	NONE	NONE	2.79 [.110]	78.33 [3.084]	76.20 [3.000]	30	62	3-86479-5
	NONE	NONE	2.79 [.110]	75.79 [2.984]	73.66 [2.900]	29	60	3-86479-4
	NONE	NONE	2.79 [.110]	73.25 [2.884]	71.12 [2.800]	28	58	3-86479-3
	NONE	NONE	2.79 [.110]	70.71 [2.784]	68.58 [2.700]	27	56	3-86479-2
	NONE	NONE	2.79 [.110]	68.17 [2.684]	66.04 [2.600]	26	54	3-86479-1
	NONE	NONE	2.79 [.110]	65.63 [2.584]	63.50 [2.500]	25	52	3-86479-0
	NONE	NONE	2.79 [.110]	63.09 [2.484]	60.96 [2.400]	24	50	2-86479-9
	NONE	NONE	2.79 [.110]	60.55 [2.384]	58.42 [2.300]	23	48	2-86479-8
	NONE	NONE	2.79 [.110]	58.01 [2.284]	55.88 [2.200]	22	46	2-86479-7
	NONE	NONE	2.79 [.110]	55.47 [2.184]	53.34 [2.100]	21	44	2-86479-6
	NONE	NONE	2.79 [.110]	52.93 [2.084]	50.80 [2.000]	20	42	2-86479-5
	NONE	NONE	2.79 [.110]	50.39 [1.984]	48.26 [1.900]	19	40	2-86479-4
	NONE	NONE	2.79 [.110]	47.85 [1.884]	45.72 [1.800]	18	38	2-86479-3
	NONE	NONE	2.79 [.110]	45.31 [1.784]	43.18 [1.700]	17	36	2-86479-2
	NONE	NONE	2.79 [.110]	42.77 [1.684]	40.64 [1.600]	16	34	2-86479-1
	NONE	NONE	2.79 [.110]	40.23 [1.584]	38.10 [1.500]	15	32	2-86479-0
	NONE	NONE	2.79 [.110]	37.69 [1.484]	35.56 [1.400]	14	30	1-86479-9
	NONE	NONE	2.79 [.110]	35.15 [1.384]	33.02 [1.300]	13	28	1-86479-8
	NONE	NONE	2.79 [.110]	32.61 [1.284]	30.48 [1.200]	12	26	1-86479-7
	NONE	NONE	2.79 [.110]	30.07 [1.184]	27.94 [1.100]	11	24	1-86479-6
	NONE	NONE	2.79 [.110]	27.53 [1.084]	25.40 [1.000]	10	22	1-86479-5
	NONE	NONE	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	1-86479-4
	NONE	NONE	2.79 [.110]	22.45 [.884]	20.32 [.800]	8	18	1-86479-3
	NONE	NONE	2.79 [.110]	20.00 [.784]	17.78 [.700]	7	16	1-86479-2
	NONE	NONE	2.79 [.110]	17.37 [.684]	15.24 [.600]	6	14	1-86479-1
	NONE	NONE	2.79 [.110]	14.83 [.584]	12.70 [.500]	5	12	86479-9
	NONE	NONE	2.79 [.110]	12.29 [.484]	10.16 [.400]	4	10	86479-8
	NONE	NONE	2.79 [.110]	19.91 [.784]	17.78 [.700]	7	16	86479-7
	NONE	NONE	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	86479-6
	NONE	NONE	2.79 [.110]	30.07 [1.184]	27.94 [1.100]	11	24	86479-5
	NONE	NONE	2.79 [.110]	22.45 [.884]	20.32 [.800]	8	18	86479-4
	NONE	NONE	2.79 [.110]	17.37 [.684]	15.24 [.600]	6	14	86479-3
	NONE	NONE	2.79 [.110]	14.83 [.584]	12.70 [.500]	5	12	86479-2
	NONE	NONE	2.79 [.110]	12.29 [.484]	10.16 [.400]	4	10	86479-1
	NONE	NONE	2.79 [.110]	19.91 [.784]	17.78 [.700]	7	16	86479-0
	NONE	NONE	2.79 [.110]	24.99 [.984]	22.86 [.900]	9	20	86479-9
	NONE	NONE	2.79 [.110]	32.61 [1.284]	30.48 [1.200]	12	26	86479-8
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-7
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-6
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-5
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-4
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-3
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-2
	NONE	NONE	2.79 [.110]	-	-	-	-	86479-1
	ROW E	ROW D	Z	C	B	A	NO OF POSN	PART NUMBER
	POSTS OMITTED							

SUPERSEDED BY 4-87230-2  
 SUPERSEDED BY 4-87230-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J KNAUB 16MAY94	<b>STE</b> TE Connectivity
DIMENSIONS: mm [INCHES]		CJK J KNITTLE 17MAY94	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J KNITTLE 17MAY94	NAME
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	ASSEMBLY, MOD II, DOUBLE ROW .100 X .100 CL, RIGHT ANGLE WITH SPANKED TAILS
2 PLC ± .13 [.005]	3 PLC ± -	APPLICATION SPEC	SIZE CASE CODE DRAWING NO
4 PLC ± -	ANGLES ± -	WEIGHT	A1 00779 86479
MATERIAL: H95-FLAME RETARDANT THERMOPLASTIC POLY-BLACK POSTS- PING. BRONZE	FINISH: 1	CUSTOMER DRAWING	RESTRICTED TO
		SCALE: 4:1	SHEET 1 of 1
		REV: S3	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)  
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[801-93-011-10-001000](#)