



## COMPACT POWER BLOCKS

The compact secured and cost-effective solution for power connection

From 50 to 300 mm<sup>2</sup>, TS35 and panel mount

The Compact Terminal Blocks cover a wide variety of applications from mechanical engineering, industrial equipment, automation to wind turbines, solar energy or switchgears. They offer cost, weight and space savings from optimized aluminum body and compact design.



### HIGHLY VERSATILE

#### Large scope of conductors accepted

The aluminum body combined with specific coating allow the use of aluminum & copper conductors whether round or sector-shaped, solid, stranded or flexible with ferrule.

#### Modularity

Available in 2 connection for power connection as well as 4 connections for power distribution purposes.

#### Easy monitoring or supply

Blocks from 95 to 300 mm<sup>2</sup> have an extra built-in measurement tapping connection to provide main supply monitoring or to provide supply to a control equipment.



### SECURED AND COMPACT CONNECTION

#### Protection of connection process, conductor and the operator

- Hexagon drive with hex-wrenge for transmission of high torque moments.
- The fine pitch thread allows transmission of high torque moments.
- The turned screw ends prevent damage to the relatively soft aluminium conductor material on installation.
- Reinforced Finger safe and dust protection by side cover when block is not wired.

#### Reduced oxidation risks

- Specific coating reduces oxidation risks with aluminum or copper conductors.
- Push-through plastic protection keep conductors from touching in the middle.



### EASY TO INSTALL AND USE

#### Compact and firm grip

The compact body combines easy snap-on the rail with high and firm grip after being installed.

Low drift firm body & cover keeps good alignment even under high torque and cable weight.

#### Light weight body

The aluminum body offers a lightweight product easier to stock & install.

#### Two Mounting option


All blocks can be mounted on mounting plates or TS 35 rails according to IEC 60715 / DIN EN 50022.

#### Easy identification

The large area on top cover of the block allow easy identification with standard or custom labels.



**PRODUCT FEATURES**

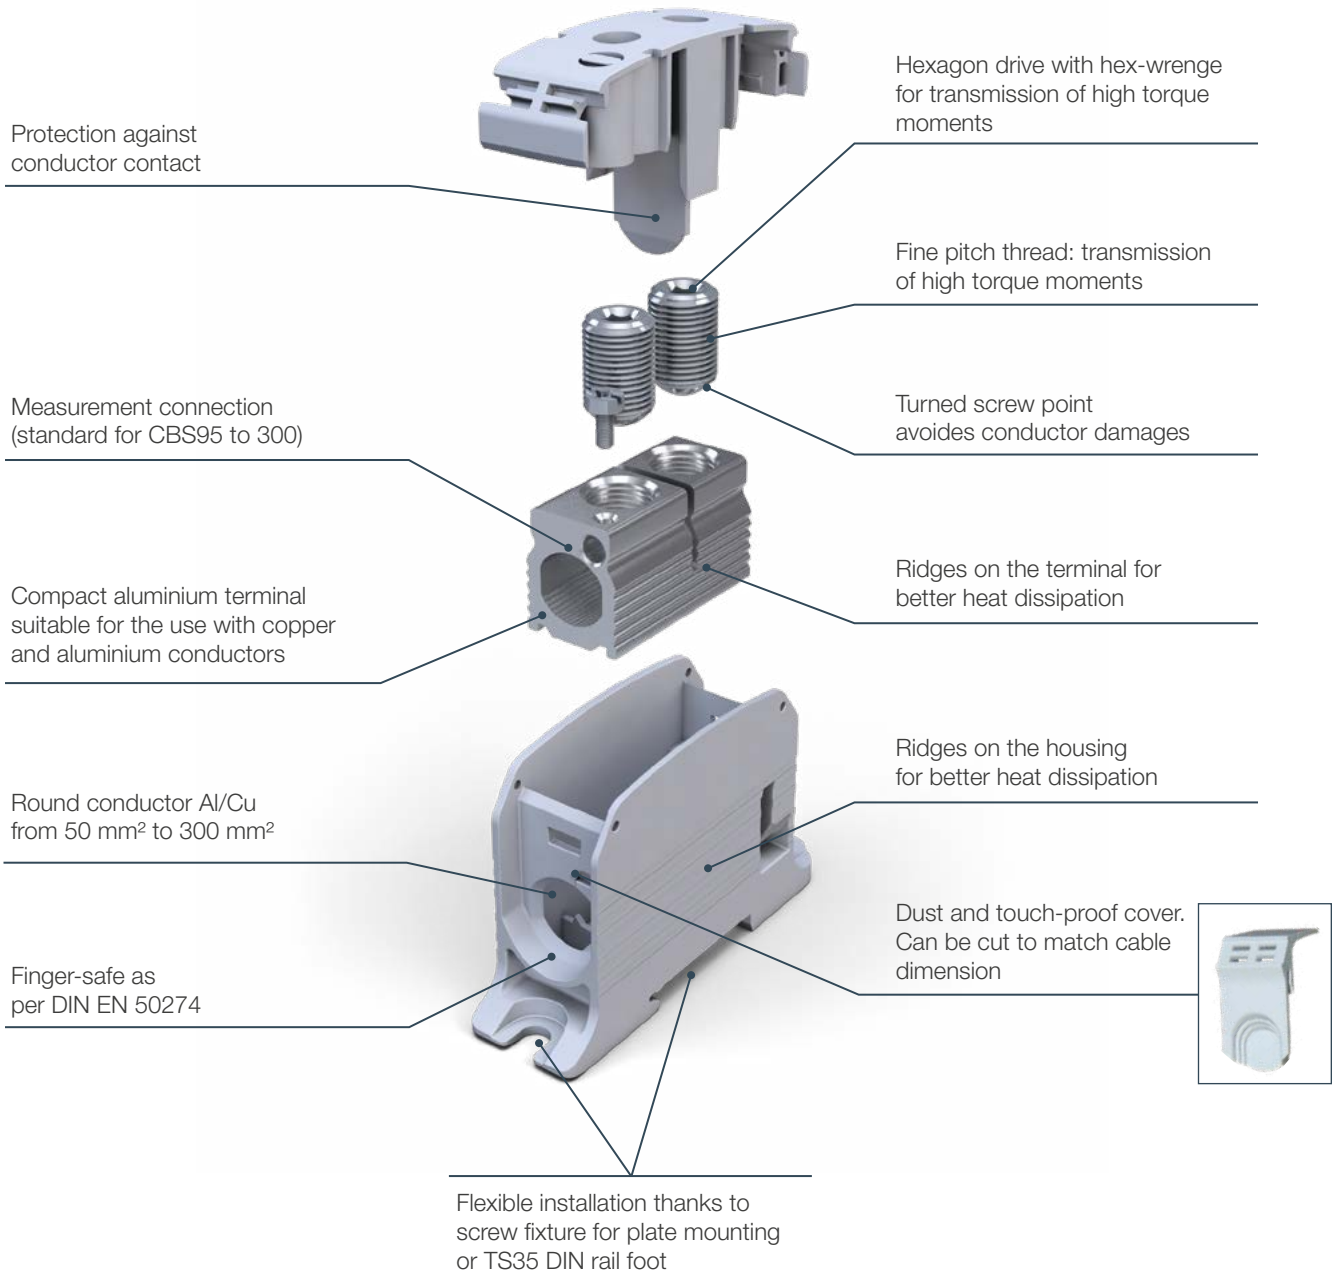

**Approvals**

- IEC 60947-7-1
- IEC 61238-1 (Class A)
- UL-1059
- UL 486E
- CSA C22.2 No.158-10



























**Conformity**





## PRODUCT ORDERING INFORMATION

	Main	Tapping	Spacing	Current	Voltage	Function	Color	Type	Part Number	Accessories	Packing	
	Cross section mm <sup>2</sup> /AWG	mm <sup>2</sup> /AWG	mm in	IEC Cu/AL UL Cu/AL	IEC/UL V					Cover/Markers		
<b>50 mm<sup>2</sup>, Single pole</b> 	4-35 / 12-2		22 0.87	150 / 150 A	150 / 120 A	1000 / 1000		Grey	CBS50-2P	1SNF516011R0000		9
								Grey/Blue	CBS50-2P-BL	1SNF516021R0000	CBS50-Cover (54 Pcs/Pkg)	9
								Grey/Green	CBS50-2P-GR	1SNF516031R0000	1SNF916710R0000	9
<b>50 mm<sup>2</sup>, Double pole</b> 	6-50 / 10-0		35.6 1.4				Grey	CBS50-4P	1SNF516111R0000	VYT0512: 12x5 mm Self-adhesive white label	5	
							Grey/Blue	CBS50-4P-BL	1SNF516121R0000	1SNA235837R0000	5	
							Grey/Green	CBS50-4P-GR	1SNF516131R0000		5	
<b>95 mm<sup>2</sup>, Single pole</b> 	10-70 / 8-00	1.5-6 / 10-16	25.5 1	232 / 200 A	200 / 155 A	1000 / 1000		Grey	CBS95-2P	1SNF526011R0000	CBS95-Cover (20 Pcs/Pkg)	2
								Grey/Blue	CBS95-2P-BL	1SNF526021R0000	1SNF926710R0000	2
								Grey/Green	CBS95-2P-GR	1SNF526031R0000	TAA0917: 17x9 mm Self-adhesive rigid white label	2
<b>95 mm<sup>2</sup>, Double pole</b> 	16-95 / 6-000	1.5-10 / 8-16	47 1.85				Grey	CBS95-4P	1SNF526111R0000	1SNA235776R0000	1	
							Grey/Blue	CBS95-4P-BL	1SNF526121R0000	VYT0817: 17x8 mm Self-adhesive white label	1	
							Grey/Green	CBS95-4P-GR	1SNF526131R0000	1SNA235844R0000	1	
<b>185 mm<sup>2</sup>, Single pole</b> 	35-150 / 00-300 Kcmil	1.5-6 / 8-16	37.5 1.47	353 A /	310 / 250 A	1000 / 1000		Grey	CBS185-2P	1SNF536011R0000	CBS185-Cover (12 Pcs/Pkg)	1
								Grey/Blue	CBS185-2P-BL	1SNF536021R0000	1SNF936710R0000	1
	95-185 / 000-350 Kcmil	1.5-10 / 10-16						Grey	CBS185-2P	1SNF536011R0000	TAA0917: 17x9 mm Self-adhesive rigid white label	1
								Grey/Blue	CBS185-2P-BL	1SNF536021R0000	1SNA235776R0000	1
	150-300 / 300-600 Kcmil	1.5-10 / 10-16						Grey	CBS185-2P	1SNF536011R0000	VYT0817: 17x8 mm Self-adhesive white label	1
								Grey/Blue	CBS185-2P-BL	1SNF536021R0000	1SNA235844R0000	1
<b>300 mm<sup>2</sup>, Single pole</b> 	50-240 / 250-500 Kcmil	1.5-6 / 8-16	45 1.77	520 A /	420 / 340 A	1000 / 1000		Grey	CBS300-2P	1SNF546011R0000	CBS300-Cover (8 Pcs/Pkg)	1
								Grey/Blue	CBS300-2P-BL	1SNF546021R0000	1SNF946710R0000	1
	150-300 / 300-600 Kcmil	1.5-10 / 10-16						Grey	CBS300-2P	1SNF546011R0000	TAA0917: 17x9 mm Self-adhesive white label	1
								Grey/Blue	CBS300-2P-BL	1SNF546021R0000	1SNA235776R0000	1
								Grey	CBS300-2P	1SNF546011R0000	VYT0817: 17x8 mm Self-adhesive white label	1
								Grey/Blue	CBS300-2P-BL	1SNF546021R0000	1SNA235844R0000	1



<b>Not allowed</b> 			
Flexible without ferrule (IEC V-K & UL: class 5/6)	Flexible with insulated ferrule (IEC V-K & UL: class 5/6)	Rigid Solid (IEC V-U class 1, UL solid)	Rigid Stranded (IEC V-R class 2, UL class B/C)

## DIMENSIONS & ELECTRICAL CHARACTERISTICS

### Power loss for single pole & double pole



#### 50 mm<sup>2</sup>

Dimensions

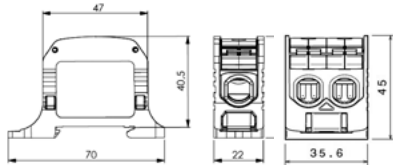



#### 185 mm<sup>2</sup>

Dimensions

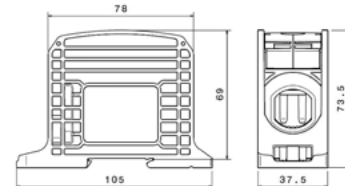



#### 95 mm<sup>2</sup>

Dimensions

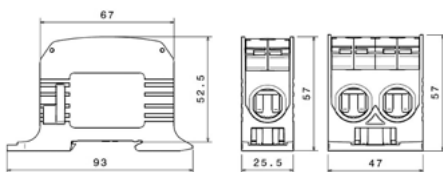

#### 300 mm<sup>2</sup>

Dimensions

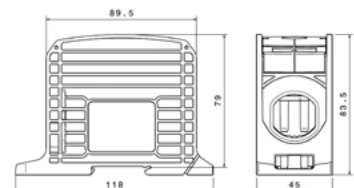

## Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit [te.com/support](https://te.com/support) to chat with a Product Information Specialist.

---

## te.com

© 2022 TE Connectivity Ltd. family of companies. All Rights Reserved.

ENTRELEC, TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

INDUSTRIAL / ENTRELEC COMPACT POWER BLOCKS / BROCHURE / EN

03/22

## BROCHURE

TE Connectivity  
3, rue Jean Perrin  
69687 Chassieu cedex  
France  
Tel: +33 481923100

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Terminal Blocks](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[00110420202](#) [00175550302](#) [8WA1011-1BH23](#) [9123140000](#) [RBO 5-T-B-HEX](#) [HSL-TB64-DIN](#) [90.070](#) [90.202](#) [912314](#) [260-301\\_NR](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [2907033](#) [35956](#) [USK 10](#) [102510](#) [5520682](#) [EMH 25-ZE30](#) [1SNK706410R0000](#) [1SNK705210R0000](#)  
[1SNK705151R0000](#) [1SNK506066R0000](#) [1SNK506061R0000](#) [1SNK506012R0000](#) [1SNK505060R0000](#) [UM 45-SEFE M.NUT BK](#)  
[1SNK506013R0000](#) [1SNK506030R0000](#) [1SNK508062R0000](#) [1SNK508065R0000](#) [1SNK508066R0000](#) [1SNK705010R0000](#)  
[1SNK705012R0000](#) [1SNK705150R0000](#) [1SNK705152R0000](#) [1SNK705310R0000](#) [1SNK706010R0000](#)