


Raychem

TE Internal #: 867859-000 Heat Shrink Boots, 180°, Molded Part Shape Code 202, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]

View on TE.com >



Wire Protection & Management > Heat Shrink Molded Shapes > Heat Shrink Boots > Heat Shrink Boots: Non Lipped, Straight



Molded Part Angle: 180 ° Molded Part Shape Code: 202 Lipped: No Material Code: 25 Heat Shrink Boot Material Systems Code: 25

All Heat Shrink Boots: Non Lipped, Straight (171)

Features

Product Type Features

Molded Part Angle

180°

Configuration Features

Lipped	No	
Body Features		
Material Code	25	
Heat Shrink Boot Material Systems Code	25	
Adhesive Pre-Coat	Yes	
Material	Fluid Resistant Modified Elastomer	
Dimensions		
Wire/Cable Outside Diameter	.3 in, .31 in, .35 in, .39 in, .43 in, .433 in, .47 in, .55 in, 10 mm, 11 mm, 12 mm, 14 mm, 8 mm, 9 mm	
Cable Diameter Range	7.4 – 25.4 mm[.291 – 1 in]	
Usage Conditions		
Operating Temperature Range	-75 – 150 °C[-103 – 302 °F]	
Operation/Application		
Power Cable Accessory	No	

202A142-25/225-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]



Industry Standards

Approved Standards	BS-G-198-5-DE, DEF Std 59-97 Issue 3 Type DE, IEC 62329-3-102, MIS-34867
Government Qualified	No
Other	
Molded Part Shape Code	202
Fluid & Chemical Resistance	Long-Term Exposure at High Temperature

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


202A142-25/225-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]





Customers Also Bought

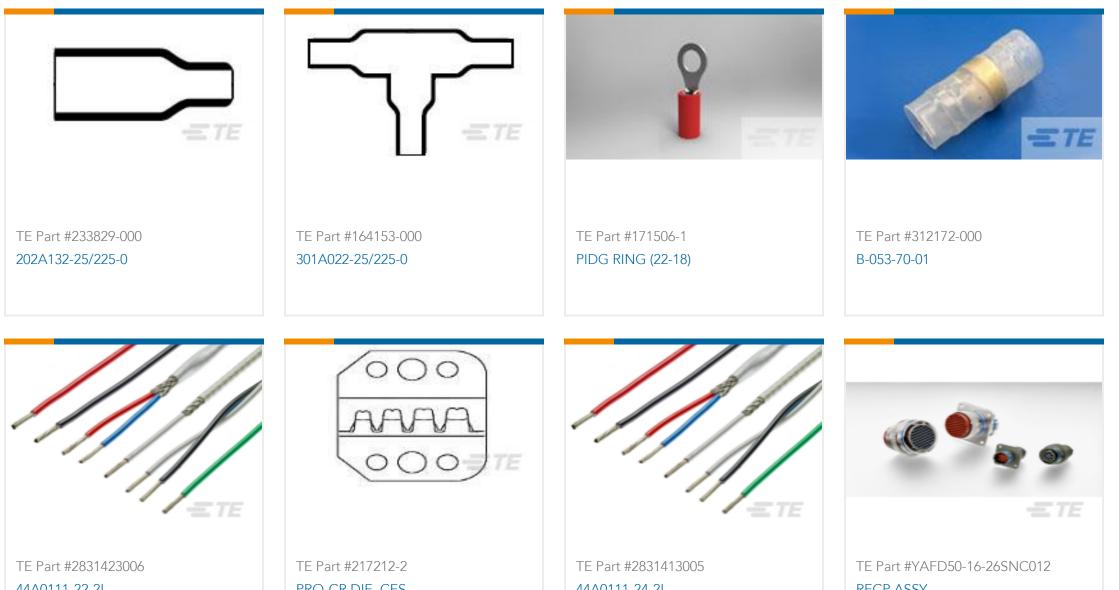

44AUTTT-22-2L	PRO-CR DIE, CES	44A0111-24-2L	RECF ASSI
=TE			
TE Part #222590-000			
203M210-19B05			

Documents

Product Drawings 202A142-25/225-0

English

Datasheets & Catalog Pages 1654025_Sec4_-25 English

Raychem Molded Parts Visual Guide

English

202A142-25/225-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]



Product Specifications Product Specification

. . .

English

Product Environmental Compliance

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

577159N001 645494-000 CX4132-000 687025-000 705331-000 718446-000 725666N001 729257-000 F27131-000 F85868-000 770-003S106W2 770-013210W1 770-013311 770-013312 806542N001 807507-000 808059-000 808362-000 808618-000 809125-000 809130-000 809218-000 812014-000 812047-000 813166-000 813767N002 814741-000 819117N001 823026-000 823070-000 825002-000 841189N001 861471-000 866647-000 879515-000 937577-000 957073-000 982033-2 A77813-000 R280576000 D96192-000 163549-000 MTPSRBCL-C 1954015-1 200W531-3-0 202A163-4-0-CS5067 202A343-3-00-0 202B221-13-0 202B231-13-0 202B563-25-07-0