# 202D121-3/86-0 - ACTIVE


#### Raychem

TE Internal #: 806995-000 Heat Shrink Boots, 180°, Molded Part Shape Code 202, Lipped, 3, 10, Adhesive Pre-Coat, Operating Temperature Range -55 – 135 °C [-67 – 275 °F]

#### View on TE.com >



Wire Protection & Management > Heat Shrink Molded Shapes > Heat Shrink Boots > Bulbous Heat Shrink Boots: Lipped, Straight

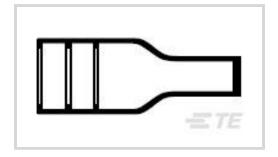

Molded Part Angle: 180 ° Molded Part Shape Code: 202 Lipped: Yes Material Code: 3 Heat Shrink Boot Material Systems Code: 10 All Bulbous Heat Shrink Boots: Lipped, Straight (487)

### Features

#### **Product Type Features**

Molded Part Angle

180°

#### **Configuration Features**

Lipped	Yes	
Body Features		
Material Code	3	
Heat Shrink Boot Material Systems Code	10	
Adhesive Pre-Coat	Yes	
Material	Semi-Rigid Modified Polyolefin	
Dimensions		
Wire/Cable Outside Diameter	.236 in, .276 in, .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, 10 mm, 11 mm, 6 mm, 7 mm, 8 mm, 9 mm	
Cable Diameter Range	5.6 – 12.4 mm[.22 – .488 in]	
Usage Conditions		
Operating Temperature Range	-55 – 135 °C[-67 – 275 °F]	
Operation/Application		
Power Cable Accessory	No	

**C** For support call+1 800 522 6752

#### 202D121-3/86-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 3, 10, Adhesive Pre-Coat, Operating Temperature Range -55 – 135 °C [-67 – 275 °F]



#### **Industry Standards**

Approved Standards	BS-G-198-5-DA, DEF Std 59-97 Issue 3 Type DA, SAE AS I 81765/1, Type I, UL 224, File E85381	
Government Qualified	No	
Other		
Molded Part Shape Code	202	
Fluid & Chemical Resistance	Occasional exposure to fluids	
Adhesive Type	High Performance Pre-Coat Adhesive	

#### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211)

Does not contain REACH SVHC

#### Halogen Content

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


#### 202D121-3/86-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 3, 10, Adhesive Pre-Coat, Operating Temperature Range -55 – 135 °C [-67 – 275 °F]





## Customers Also Bought

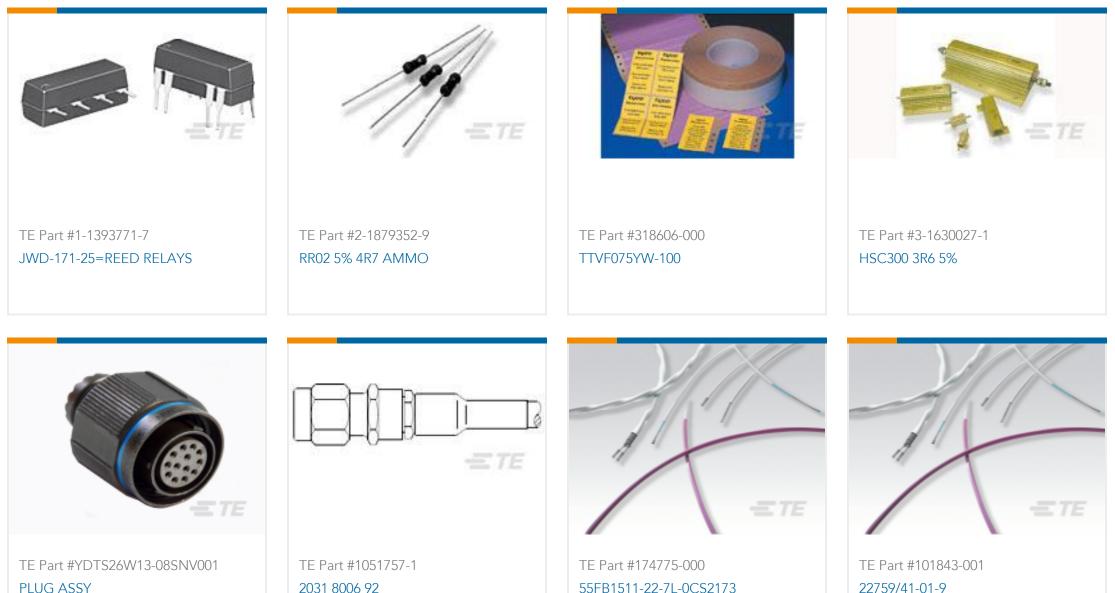

T LOG A331	2031 0000 72	JJI DIJII-22-7 L-0CJ2173	22/3//41-01-7
ETE			
TE Part #398665-000 TX40AB00-0804			

## Documents

Product Drawings 202D121-3/86-0

English

Datasheets & Catalog Pages 1654025\_Sec4\_-3 English

Raychem Molded Parts Visual Guide

English

#### 202D121-3/86-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 3, 10, Adhesive Pre-Coat, Operating Temperature Range -55 – 135 °C [-67 – 275 °F]



Product Specifications

**Product Specification** 

English

Product Environmental Compliance

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

#### Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

577159N001
645494-000
CX4132-000
687025-000
705331-000
718446-000
725666N001
729257-000
F27131-000
F85868-000
770 

003S106W2
806542N001
807507-000
808059-000
808362-000
808618-000
809125-000
809130-000
809218-000
812014-000
812047-000

813166-000
813767N002
814741-000
819117N001
823026-000
823070-000
825002-000
841189N001
861471-000
866647-000
879515 

000
937577-000
957073-000
982033-2
A77813-000
R280576000
D96192-000
163549-000
MTPSRBCL-C
1954015-1
200W531-3-0

202A163-4-0-CS5067
202A343-3-00-0
202B221-13-0
202B563-25-07-0
202C241-13-0
202D121-4-01/86-0
202D132-4 

07/42-0
8
8
8
8
8
8
8
8
8
8
8
8
8
9
8
9
8
8
8
8
8
8
8
8
8
8
8
8
8
8
8
8
8
8