202D153-100/180-0 - ACTIVE


Raychem

TE Internal #: 135935-000 Heat Shrink Boots, 180°, Molded Part Shape Code 202, Lipped, 100, 100, Adhesive Pre-Coat, Operating Temperature Range -30 -105 °C [-22 – 221 °F]

View on TE.com >



Wire Protection & Management > Heat Shrink Molded Shapes > Heat Shrink Boots > Bulbous Heat Shrink Boots: Lipped, Straight



Molded Part Angle: 180 ° Molded Part Shape Code: 202 Lipped: Yes Material Code: 100 Heat Shrink Boot Material Systems Code: 100

All Bulbous Heat Shrink Boots: Lipped, Straight (487)

Features

Product Type Features

Molded Part Angle

180°

Configuration Features

Lipped	Yes
Body Features	
Material Code	100
Heat Shrink Boot Material Systems Code	100
Adhesive Pre-Coat	Yes
Material	Low Fire Hazard Material
Dimensions	
Inside Diameter as Supplied	36 mm[1.42 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Flammability	Low Fire Hazard
Operation/Application	
Power Cable Accessory	No
Industry Standards	

202D153-100/180-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 100, 100, Adhesive Pre-Coat, Operating Temperature Range -30 – 105 °C [-22 – 221 °F]



Approved Standards	VG95343 Parts 29 and 30
Government Qualified	No
Other	
Molded Part Shape Code	202
Fluid & Chemical Resistance	Long-Term Fluid Exposure at High Temperatures
Adhesive Options	/180 Precoat
Product Compliance For compliance documentation, visit the product page on TE.com>	

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JUL 2021 (219) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC

Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


202D153-100/180-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 100, 100, Adhesive Pre-Coat, Operating Temperature Range -30 – 105 °C [-22 – 221 °F]





Customers Also Bought

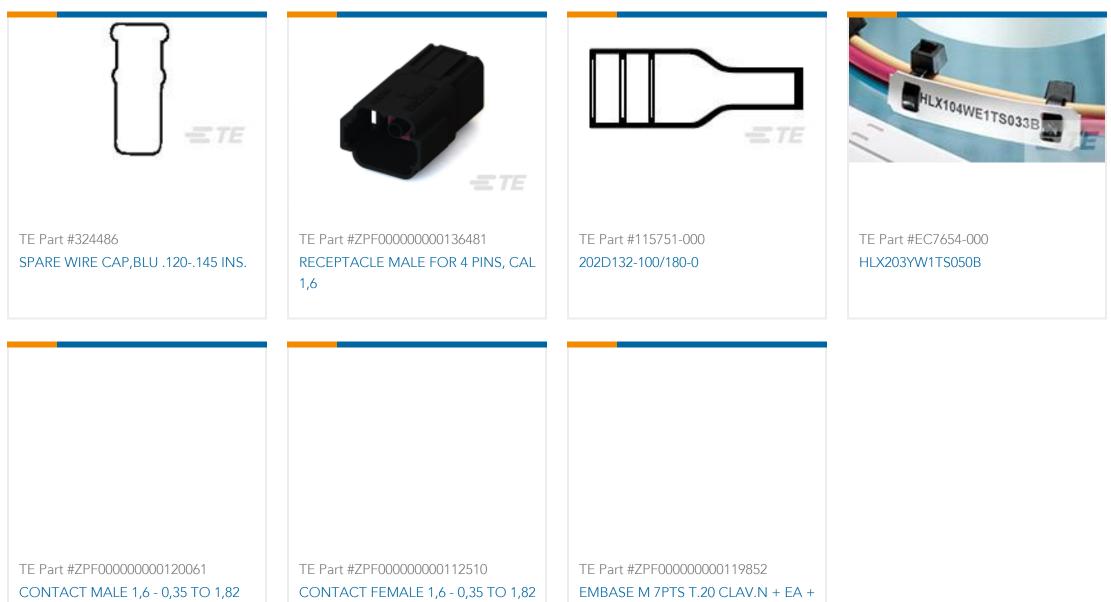

CONTACT MALE 1,6 - 0,35 TO 1,82	
MM2 S/A	

Documents

Product Drawings 202D153-100/180-0

English

Datasheets & Catalog Pages 1654025_Sec4_-100

English

Raychem Molded Parts Visual Guide

English

Product Specifications Product Specification

English

Product Environmental Compliance Safety Datasheet

Safety Datasheet

English

C For support call+1 800 522 6752

202D153-100/180-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 100, 100, Adhesive Pre-Coat, Operating Temperature Range -30 – 105 °C [-22 – 221 °F]



Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

577159N001 645494-000 CX4132-000 687025-000 705331-000 718446-000 725666N001 729257-000 F27131-000 F85868-000 770-003S106W2 770-013210W1 770-013311 770-013312 806542N001 807507-000 808059-000 808362-000 808618-000 809125-000 809130-000 809218-000 812014-000 812047-000 813166-000 813767N002 814741-000 819117N001 823026-000 823070-000 825002-000 841189N001 861471-000 866647-000 879515-000 937577-000 957073-000 982033-2 A77813-000 R280576000 D96192-000 163549-000 MTPSRBCL-C 1954015-1 200W531-3-0 202A163-4-0-CS5067 202A343-3-00-0 202B221-13-0 202B231-13-0 202B563-25-07-0