
Raychem

TE Internal #: CZ1870-000 Heat Shrink Boots, Straight, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]

View on TE.com >

Harnessing > Heat Shrink Components > Heat Shrink Boots

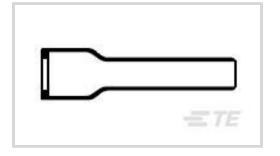

Molded Part Shape: Straight

Molded Part Shape Code: 202

Lipped: Yes

Material Code: 25

Heat Shrink Boot Material Systems Code: 25

Features

Product Type Features

Molded Part Shape

Straight

Configuration Features

Lipped



Yes

Body Features

| Material Code | 25 | | | |
|--|------------------------------------|--|--|--|
| Heat Shrink Boot Material Systems Code | 25 | | | |
| Adhesive Pre-Coat | Yes | | | |
| Material | Fluid Resistant Modified Elastomer | | | |
| Dimensions | | | | |
| Inside Diameter as Supplied | 25.7 mm[1.01 in] | | | |
| Usage Conditions | | | | |
| Operating Temperature Range | -75 – 150 °C[-103 – 302 °F] | | | |
| Operation/Application | | | | |
| Power Cable Accessory | No | | | |
| Industry Standards | | | | |
| Approved Standards | VG95343 Parts 6,7,8 and 9 | | | |
| Government Qualified | No | | | |

Heat Shrink Boots, Straight, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]




Other

| Molded Part Shape Code | 202 | | | | |
|---|---|--|--|--|--|
| Fluid/Chemical Resistance | Long-Term Exposure at High Temperature | | | | |
| Product Compliance | | | | | |
| For compliance documentation, visit the product page on TE.com> | | | | | |
| EU RoHS Directive 2011/65/EU | Compliant | | | | |
| EU ELV Directive 2000/53/EC | Compliant | | | | |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold | | | | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC | | | | |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. | | | | |
| Solder Process Capability | Not reviewed for solder process capability | | | | |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

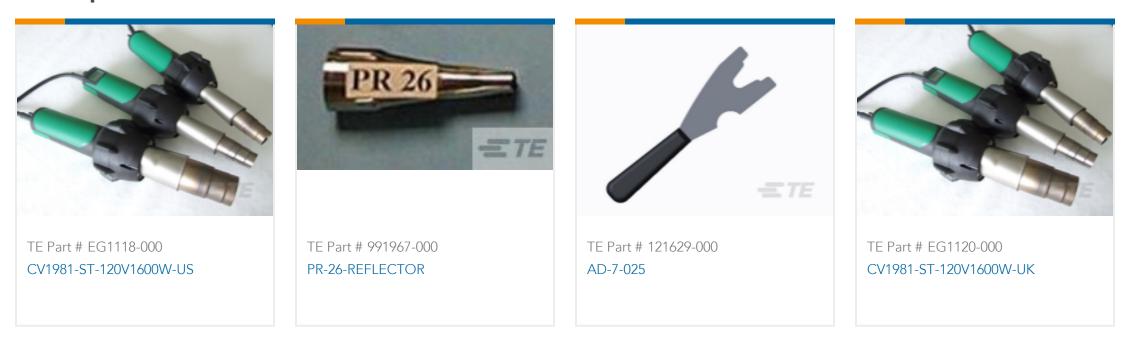

Heat Shrink Boots, Straight, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]






TE Part # EG1115-000 CV1981-ST-230V1600W-CH



TE Part # EG1114-000 CV1981-ST-230V1600W-EU

Customers Also Bought

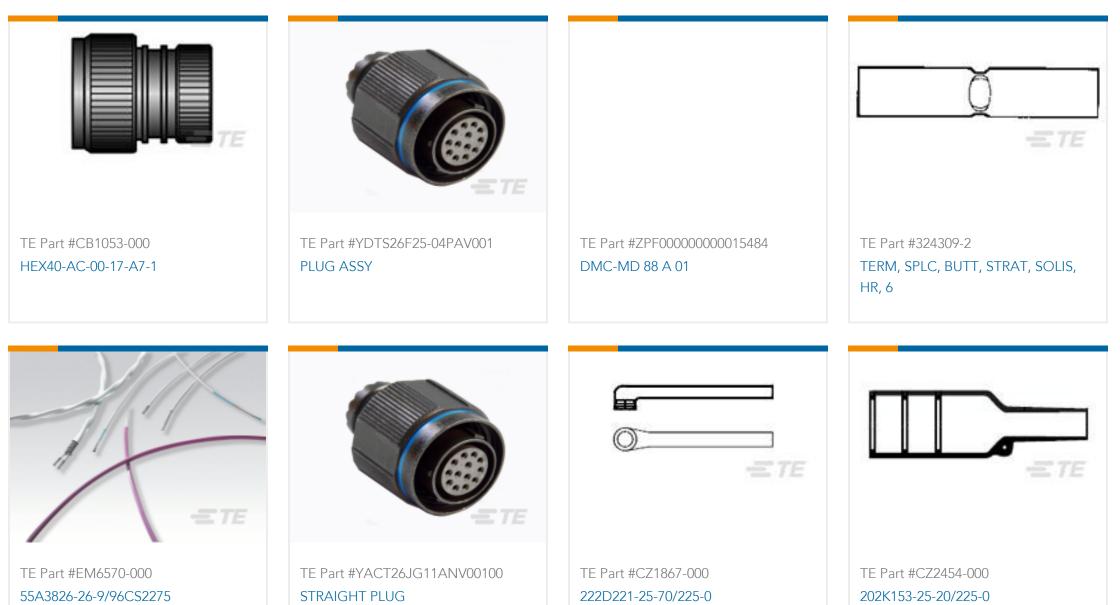

| 55A3826-26-9/96CS2275 | STRAIGHT PLUG | 222D221-25-7 |
|--|--|--------------|
| | | |
| TE Part #YDTS26W25-19SA0000 PLUG ASSY | TE Part #240217-000 HEX40-AC-00-21-A9-1 | |

Documents

Product Drawings 202D221-25-70/225-0

English

Datasheets & Catalog Pages

1654025_Sec4_-25

English

1654025_Sec4_202D211to299

English

Heat Shrink Boots, Straight, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]



Raychem Molded Parts Visual Guide

English

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Cable Boots category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

618235-000 622A014-3-0 CX4132-000 879515-000 982033-2 R280576000 1300830729 EN3BOOTLKIT MTPSRBCL-C 1811481-1 200W531-3-0 202A121-386-0 202A142-4-00/42-0 202A163-4-0-CS5067 202B221-13-0 202B231-13-0 202B563-25-07-0 202C621710CS5361 202D132-4-07/42-0 202D221-4-0-CS5349 202D221-4-26-0 202D263-25-08-0 202D263-4-22/42-0 202D263-4-88-0 202D921-2542-0 202E336-71-0 202F211-50-22-0-CS8474 202F242-50-05-0 202F242-51-04/164-0 202K121-25-CS-1858-0 202K121-25-CS-2062-0 202K132-25-01/225-0CS8387 202K153-3-0186-0 202S132-25-UP-0 203W301-3/42-0 207W663-100/184-0-CS5657 207W623-100-01/184-0 207W634-100/184-0-CS5657 207W656-100-01/184-0 207W667-100-01/184-0 207W667-100/184-0 208A011-3-0 208A021-3-0 221A011-51164-0-CS7133 222A121-2586 222A152-342-0 222A213-25-0-CS5613 222D221-25-13/86-0 222D232-4-61-0-CS5078 222D253-100-22-0