


#### Raychem

TE Internal #: 481350-000 Heat Shrink Boots, 180°, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]

#### View on TE.com >



Wire Protection & Management > Heat Shrink Molded Shapes > Heat Shrink Boots > Bulbous Heat Shrink Boots: Lipped, Straight



Molded Part Angle: 180 ° Molded Part Shape Code: 202 Lipped: Yes Material Code: 25 Heat Shrink Boot Material Systems Code: 25

#### All Bulbous Heat Shrink Boots: Lipped, Straight (487)

# Features

### Product Type Features

Molded Part Angle

180°

## **Configuration Features**

Lipped	Yes								
Body Features									
Material Code	25								
Heat Shrink Boot Material Systems Code	25								
Adhesive Pre-Coat	Yes								
Material	Fluid Resistant Modified Elastomer								
Dimensions									
Wire/Cable Outside Diameter	.276 in, .3 in, .31 in, .35 in, .39 in, .43 in, .433 in, .47 in, 10 mm, 11 mm, 12 mm, 7 mm, 8 mm, 9 mm								
Cable Diameter Range	5.9 – 14 mm[5.9 – 15 in]								
Usage Conditions									
Operating Temperature Range	-75 – 150 °C[-103 – 302 °F]								
Operation/Application									
Power Cable Accessory	No								

**C** For support call+1 800 522 6752

# 202K132-25/225-0

Heat Shrink Boots, 180°, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]



#### **Industry Standards**

Approved Standards	BS-G-198-5-DE, DEF Std 59-97 Issue 3 Type DE, IEC 62329-3-102, MIS-34867			
Government Qualified	No			
Other				
Molded Part Shape Code	202			
Fluid & Chemical Resistance	Long-Term Exposure at High Temperature			

# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2021 (211) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements

#### Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**


### 202K132-25/225-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]





# Customers Also Bought

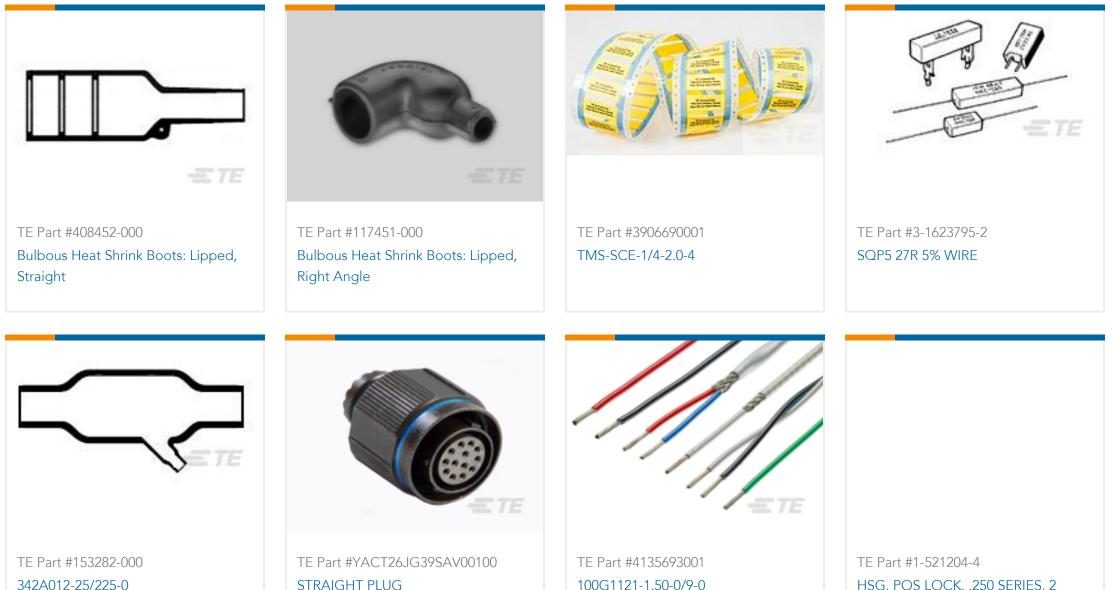

34ZAU1Z-Z3/ZZ3-U	STRAIGHT PLUG	100G1121-1.50-0/9-0	HSG, POS LOCK, .200 SERIES, Z
			POSITION

# Documents

Product Drawings

202K132-25/225-0

English

Datasheets & Catalog Pages 1654025\_Sec4\_-25

English

Raychem Molded Parts Visual Guide

English

Product Specifications Product Specification

English

Product Environmental Compliance Safety Datasheet

Safety Datasheet

# 202K132-25/225-0

Heat Shrink Boots, 180 °, Molded Part Shape Code 202, Lipped, 25, 25, Adhesive Pre-Coat, Operating Temperature Range -75 – 150 °C [-103 – 302 °F]



Safety Datasheet English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

English

Safety Datasheet

French

Safety Datasheet

German

Safety Datasheet

Safety Datasheet

Safety Datasheet

Safety Datasheet

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

577159N001 645494-000 CX4132-000 687025-000 705331-000 718446-000 725666N001 729257-000 F27131-000 F85868-000 770-003S106W2 770-013210W1 770-013311 770-013312 806542N001 807507-000 808362-000 808618-000 809125-000 809130-000 809218-000 812014-000 812047-000 813166-000 813767N002 814741-000 819117N001 823026-000 823070-000 841189N001 861471-000 866647-000 879515-000 937577-000 957073-000 982033-2 A77813-000 R280576000 D96192-000 163549-000 EN3BOOTLKIT MTPSRBCL-C 1954015-1 200W531-3-0 202A163-4-0-CS5067 202A343-3-00-0 202B221-13-0 202B231-13-0 202B563-25-07-0 202C241-13-0