


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

DESIGNED FOR USE WITH RG55/U,142,223,400	
CABLE ENTRY DIAMETER MINIMUM	
CONTACT	.040
SLEEVE	.119
DIELECTRIC	.040

LOC	DIST	REVISIONS					
AJ	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER ECO 07-004710	3/12/2007	DW	KW

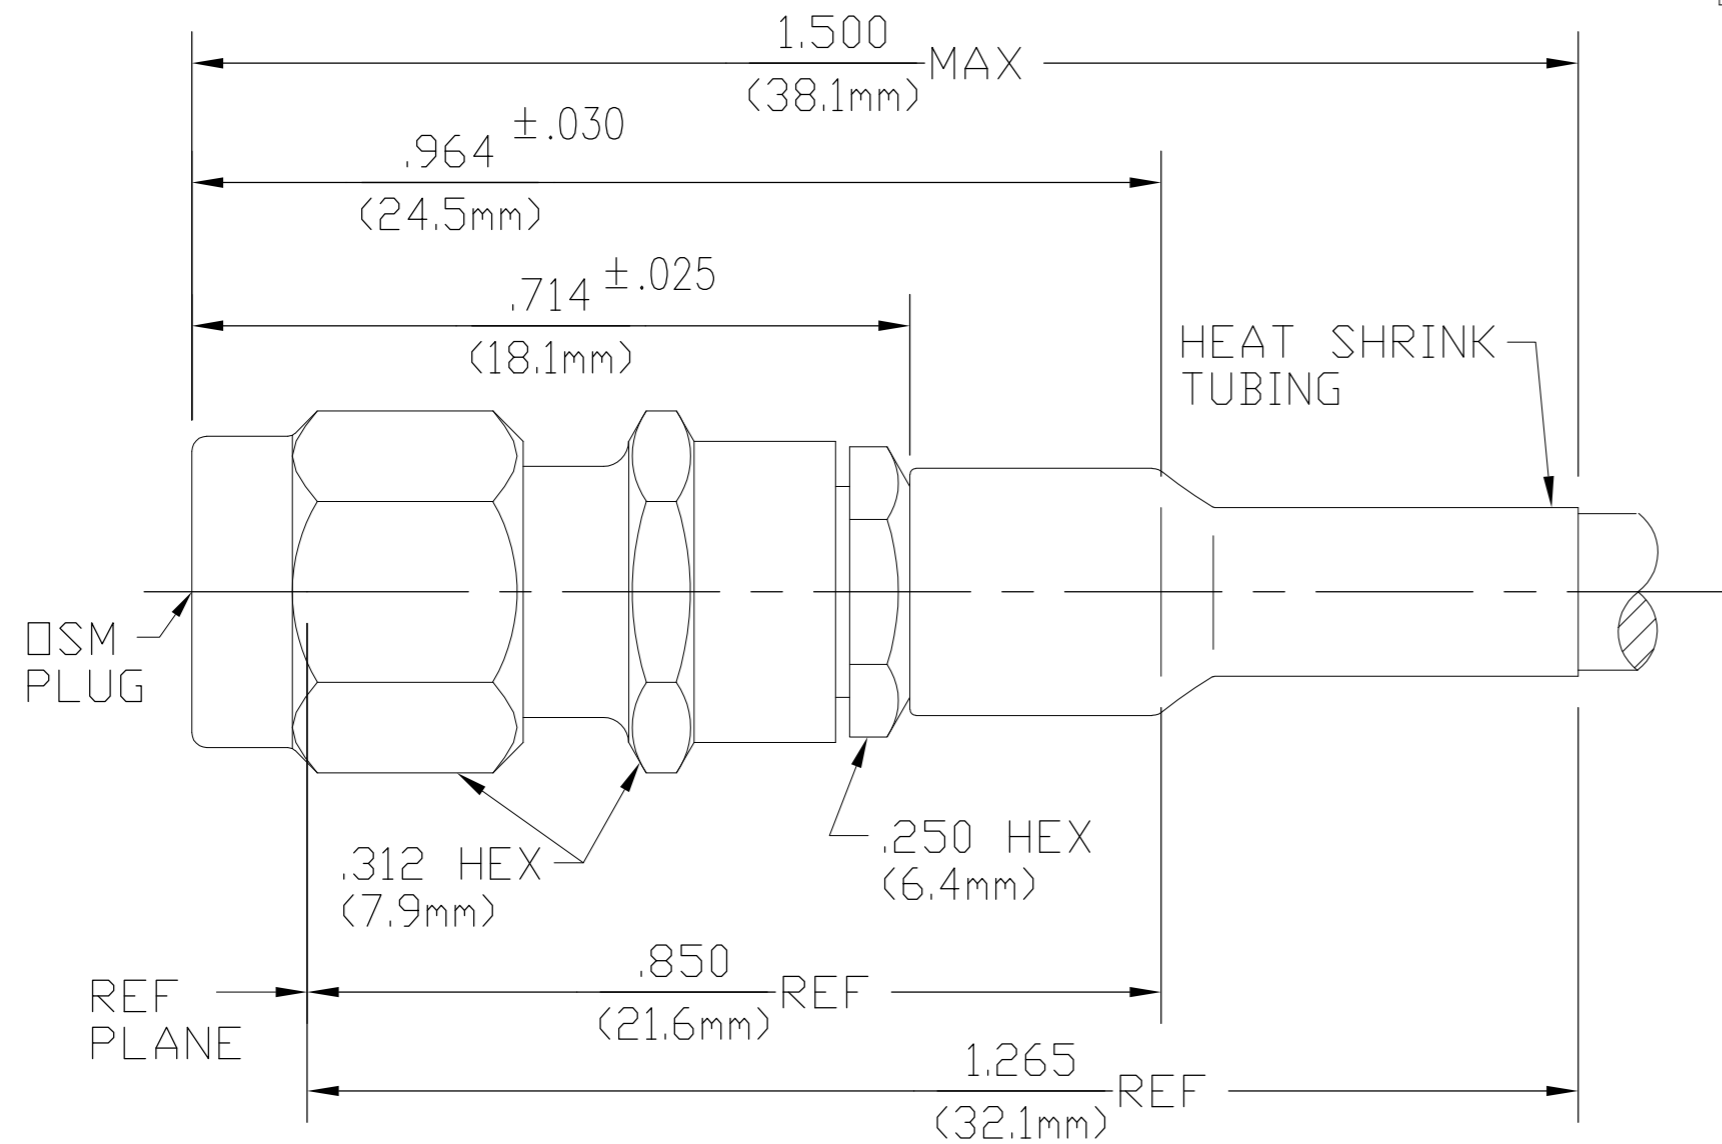

1051661-1
PART NUMBER

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATED PER QQ-P-35
COUPLING NUT		
CLAMP NUT		
SLEEVE		
DIELECTRIC	NYLON	N/A
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H OR BRASS PER ASTM-B-16	GOLD PLATE PER MIL-G-45204
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204
COMPONENT	MATERIAL	FINISH

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions MIL-STD-348A Fig. 310-1	Temperature Rating -65°C *
Frequency Range (GHz) <u>0 *</u>	Recommended Mating Torque <u>7-10 IN-Lbs</u>	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u>	Shock MIL-STD-202, Method 213, Condition I
VSWR <u>1.15 +.01(f GHz)</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Cycling MIL-STD-202, Method 107, Condition B Except HIGH TEMP SHALL BE 85°C (HIGH TEMP SHALL BE 200°C WHEN USED WITH 200°C CABLES PER MIL-C-17)
Insertion Loss (dB MAX) <u>.06(f√GHz)</u>	Connector Engagement and Disengagement (In-Lbs MAX) <u>2.0</u>	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB) <u>-60</u>	Center Contact Captivation: Axial <u>6.0</u>	Corrosion MIL-STD-202, Method 101, Condition B
Corona, 70 Ft (VRMS MIN) <u>250</u>	Radial <u>N/A</u>	
Dielectric Withstanding Voltage (VRMS MIN) <u>1,000</u>	Cable Retention Axial Lbs <u>40 Min</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>3.0</u>	Weight (Grams) <u>5.0</u>	
Outer Contact <u>2.0</u>	Hermetic Seal <u>N/A</u>	
Cable To Housing (Milliohms Max) <u>0.5</u>		
RF High Potential (VRMS MIN @ 5 MHz) <u>670</u>		
I.R. (Megohms) <u>5,000</u>		

* SEE MIL-C-17 FOR MAX RATINGS FOR APPLICABLE CABLE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	DRF	10-15-76
CHK	RBJ	4-07-77
APVD	RMF	4-07-77

tyco Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: OSM STARIGHT CABLE PLUG CRIMP ATTACHMENT

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 1051661 RESTRICTED TO: -

WEIGHT: -

CUSTOMER DRAWING SCALE: 5:1 SHEET: 1 of 1 REV: B

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[R125315120](#) [8915-1511-000](#) [89674-0827](#) [5916-1103-603](#) [6-0001-3](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#)
[630059-000](#) [M39012/25-0021](#) [M39012/79-3008](#) [M39030/3-01N](#) [M39030/3-03N](#) [M3933/25-36N](#) [6500-7071-046](#) [M83723/72W24576](#)
[M83723/72W2457N](#) [6769](#) [CX050L2AQ](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#)
[7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [7225-1512-050](#) [7242-1511-000](#) [73137-5015](#)
[73251-0111](#) [73251-0672](#) [7325-1512-000](#) [73276-1501](#) [73366-0013](#) [73404-2300](#) [73413-6080](#) [73415-5721](#) [7405-1521-005](#) [7405-1521-802](#)
[7406-1521-005](#) [804S01D04M040](#) [8145-1521-002](#) [81590](#)