


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	Z	REV PER ECO 13-006581		4-17-13	CT	RL	

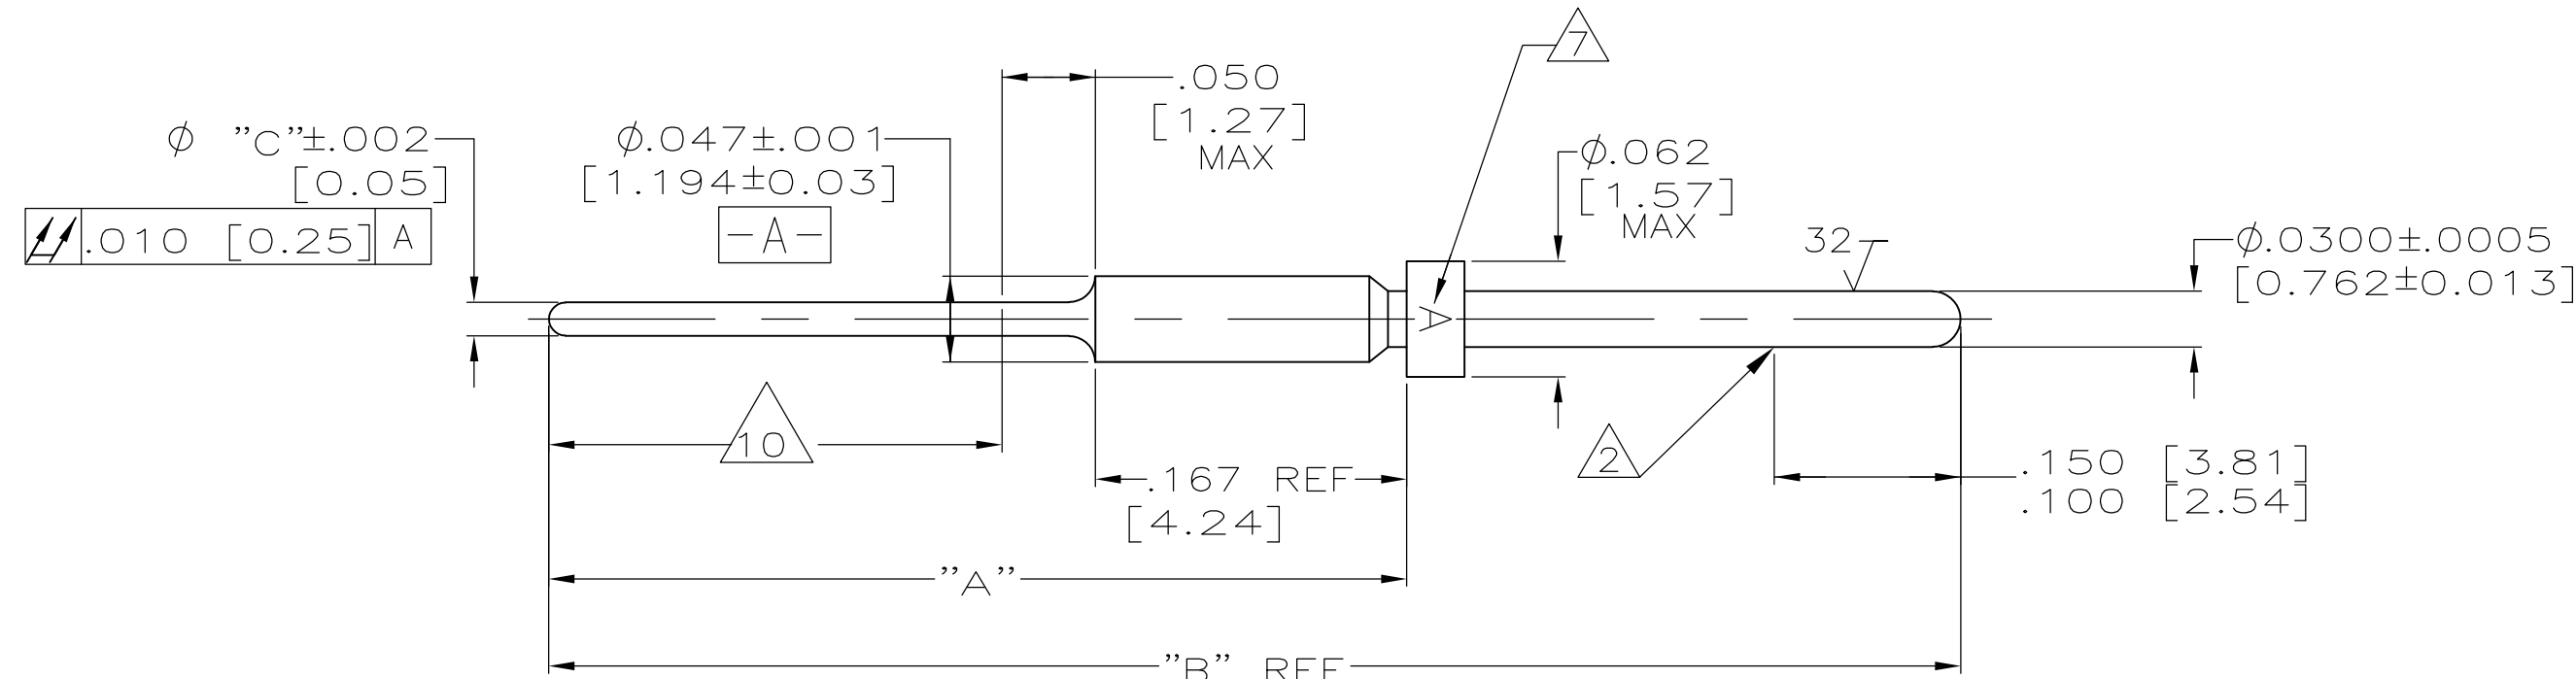

- 1. INSERTION/EXTRACTION TOOL AMP P/N 91067-1.
- △ POINT OF PLATING THICKNESS MEASUREMENT.
- △ FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000100 [0.00254] TO .000150 [0.00381] THK COPPER PER MIL-C-14550, CLASS IV.
- △ FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000050 [0.00127] TO .000150 [0.00381] THK NICKEL PER QQ-N-290.
- △ FINISH: .000050 [0.00127] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000200 [0.00508] TO .000250 [0.00635] THK NICKEL PER QQ-N-290.
- 6. CONTACTS MEET ALL APPLICABLE PERFORMANCE REQUIREMENTS OF MIL-C-39029.
- △ GOTHIC "A" LOCATED APPROX AS SHOWN.
- △ CONTACT BODY MAT'L: LEADED NICKEL COPPER (PROPRIETARY) EQUIVALENT ALTERNATE MAT'L: COPPER ALLOY PER ASTM-B-197
- △ FINISH: .000100 [0.00254] MIN THK GOLD PLATED PER ASTM-B-488, TYPE 3, CODE C, CLASS 1.25 OVER .000050 [0.00127] TO .000150 [0.00381] THK NICKEL PER QQ-N-290.
- △ 10 SOLDER DIP WITH 63/73 TIN-LEAD. MUST MEET SOLDERABILITY REQUIREMENT OF MIL-STD-202, METHOD 208.

FINISH	ϕ "C"	"B"	"A"	PART NO	
PRELIMINARY NOT RELEASED FOR PROD.	△ 3	.018 [0.46]	.735 [18.67]	.435 [11.05]	2-207683-7
PRELIMINARY NOT RELEASED FOR PROD.	△ 4	.018 [0.46]	.642 [16.31]	.345 [8.76]	2-207683-3
	△ 9	.018 [0.46]	.707 [17.96]	.410 [10.41]	2-207683-1
	△ 3	.018 [0.46]	.707 [17.96]	.410 [10.41]	2-207683-0
	△ 3	.018 [0.46]	.665 [16.89]	.368 [9.35]	1-207683-8
PRELIMINARY NOT RELEASED FOR PROD.	△ 3 △ 10	.018 [0.46]	.760 [19.30]	.460 [11.68]	1-207683-4
	△ 3 △ 10	.018 [0.46]	.860 [21.84]	.560 [14.22]	1-207683-3
	△ 3	.025 [0.64]	.860 [21.84]	.560 [14.22]	1-207683-2
	△ 5	.018 [0.46]	.760 [19.30]	.460 [11.68]	1-207683-1
	△ 4	.018 [0.46]	1.107 [28.12]	.810 [20.57]	207683-9
	△ 4	.025 [0.64]	.860 [21.84]	.560 [14.22]	207683-8
	△ 3	.018 [0.46]	.760 [19.30]	.460 [11.68]	207683-6
	△ 3	.018 [0.46]	1.107 [28.12]	.810 [20.57]	207683-4
	△ 3	.018 [0.46]	.860 [21.84]	.560 [14.22]	207683-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	T. ALEXANDER	11-11-91
CHK	F. KINSEY	11-19-91
APVD	F. KINSEY	11-19-91

NAME: F. KINSEY

PRODUCT SPEC: -

APPLICATION SPEC: -

WEIGHT: -

CUSTOMER DRAWING

SCALE: 10:1

SHEET: 1 of 1

REV: Z

TE Connectivity

PIN CONTACT, POSTED SIZE 22D

SIZE: A2

CAGE CODE: 00779

DRAWING NO: C=207683

RESTRICTED TO: -

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Contacts](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D02-22-26S-10000](#) [8656352067LF](#) [131A15029X](#) [132A11019X](#) [132J22039X](#) [132A11029X](#) [132A11049X](#) [132A12059X](#) [1757912-1](#) [188582-000](#) [162A11889X](#) [1757913-1](#) [212558-1](#) [030-1955-000](#) [053744-0098](#) [053744-0099](#) [053745-0105](#) [053745-0111](#) [601098N003](#) [86303057NLF](#) [131A11019X](#) [162A11819X](#) [40-9854MP](#) [1-208778-5](#) [FC120N2](#) [MC7526D/AA](#) [MC8122D/AA](#) [FC4010D-15](#) [FC4006D](#) [121A05329A](#) [164C16669X](#) [86566620064LF](#) [131A13019X](#) [DLS3XS5AK40X](#) [09692825723](#) [030-1954-000](#) [L17DM53744207](#) [L17RRD1M11400](#) [030-1952-000](#) [1655496](#) [030-1953-000](#) [030-1953-030](#) [132C11039X](#) [132J15019X](#) [132C15019X](#) [132A10039X](#) [131A10029X](#) [8638PSC2006LF](#) [8656453067LF](#) [86566520064LF](#)