


| REVISIONS |             |         |           |
|-----------|-------------|---------|-----------|
| REV       | DESCRIPTION | DATE    | APPROVED  |
| 01        | REVISED     | 7/14/93 | <i>AD</i> |

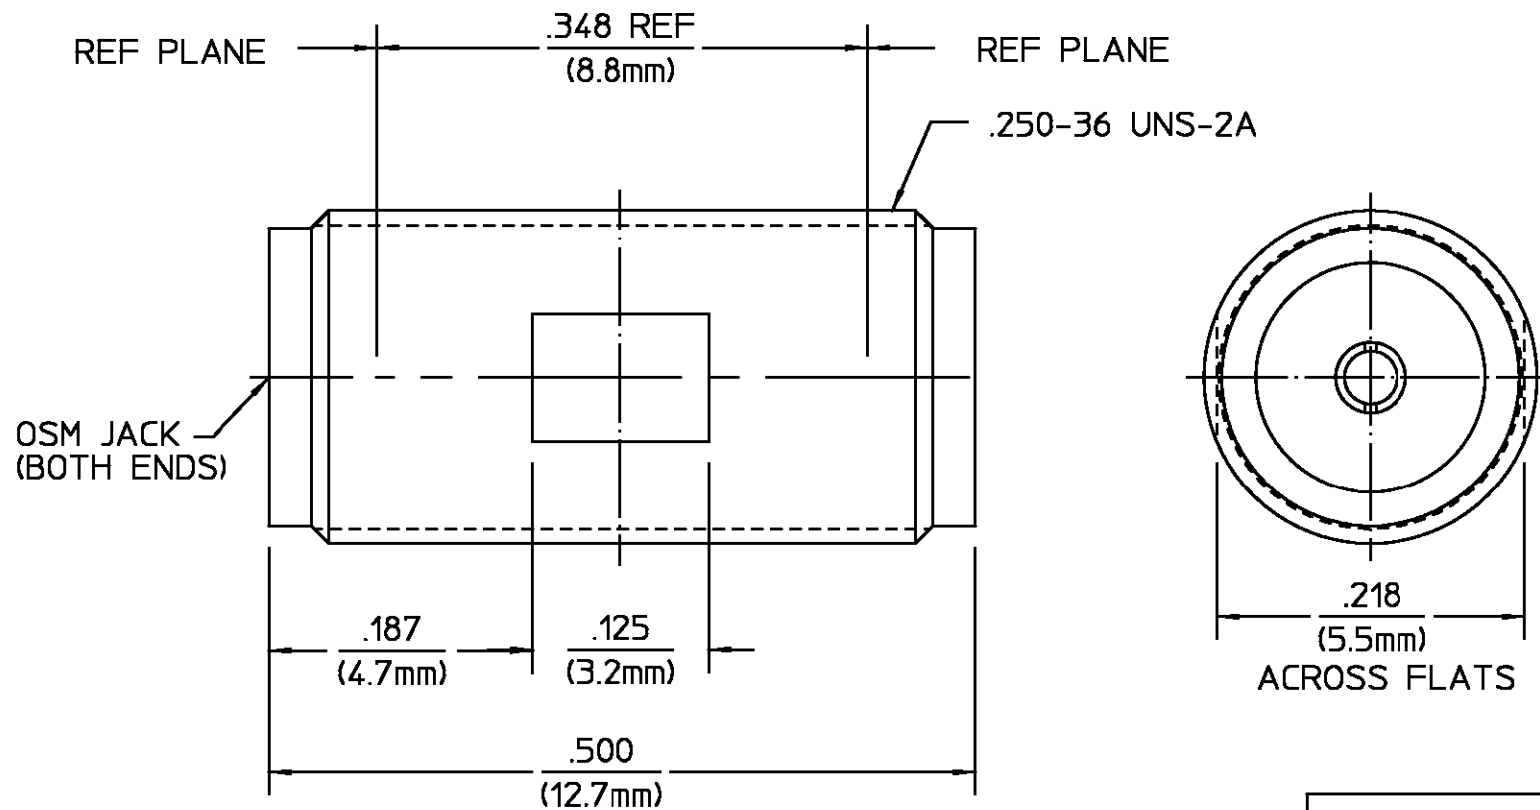

| ELECTRICAL   | MECHANICAL   | ENVIRONMENTAL   |
|--|--|---|
| Nominal Impedance (Ohms) <u>50</u>                                 | Interface Dimensions MIL-STD-348A, Fig. <u>310.2</u>   | Temperature Rating <u>-65°C To 165°C</u>                        |
| Frequency Range (GHz) DC to <u>18</u>                              | Recommended Mating Torque <u>N/A</u>                   | Vibration MIL-STD-202, Method 204, Condition D                  |
| Volt Rating (VRMS MAX) @ Sea Level <u>335</u>                      | Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u> | Shock MIL-STD-202, Method 213, Condition I                      |
| VSWR <u>1.05 + .005 f(GHz)</u>                                     | Withdrawal (MIN Oz) <u>1.0</u>                         | Thermal Shock MIL-STD-202, Method 107, Condition C,             |
| Insertion Loss (dB MAX) <u>.06 √f(GHz)</u>                         | Force to Engage and Disengage (In/Lbs MAX) <u>2.0</u>  | Moisture Resistance MIL-STD-202, Method 106, Except Vibration   |
| RF Leakage (dB MIN) <u>-[90-f(GHz)]</u>                            | Center Contact Captivation: Axial (Lbs) <u>10.0</u>    | Shall Be Omitted  |
| Corona, 70,000 Ft (VRMS MIN) <u>250</u>                            | Radial (In/Oz) <u>N/A</u>                              | Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray |
| Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1500</u> | Cable Retention: Axial Force (Lbs) <u>N/A</u>          |   |
| Contact Resistance (Milliohms MAX): Center Contact <u>4.0</u>      | Torque (In/Oz) <u>N/A</u>                              |   |
| Outer Contact <u>2.0</u>   | Weight (Grams) <u>2.0</u>                              |   |
| Cable to Housing <u>N/A</u>  |  |   |
| RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>        |  |   |
| I.R.(Megohms MIN) <u>10.000</u>                                    |  |   |

|  |  |   |
|--|--|---|
| HOUSING  | STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303  | GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550    |
| DIELECTRIC   | TFE FLUOROCARBON PER ASTM-D-1457   | N/A   |
| CENTER CONTACT   | BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H   | GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550    |
| COMPONENT  | MATERIAL   | FINISH  |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON<br>FRAC. DEC. ANGLES<br>± 1/64 ± .005 ± ° | DRAWN BY <u>G. BEERS</u> DATE <u>12-13-82</u><br>CHECKED BY <u>R. GIERAS</u> DATE <u>12-15-82</u><br>APPROVED BY <u>RMF</u> DATE <u>1-3-83</u> | AMP Incorporated<br>140 Fourth Avenue<br>Waltham, MA 02451-7599 |
| USE ASS'Y PROCEDURE  | TITLE <u>OSM JACK TO JACK ADAPTER</u>  |   |
| NO. AP. <u>N/A</u>   | SIZE <u>B</u>  | CODE IDENT NO. <u>26805</u>                                     |
|  | SCALE <u>8:1</u>   | <u>2080-1900-00</u>   |
|  |  | REV <u>01</u>   |
|  |  | SHEET 1 OF 1  |

CUSTOMER DRAWING

AMP PART # 1053492-1  
SHEET 1 OF 1 REV A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Adapters - In Series](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[5919-1503-000](#) [651A505](#) [7122-1502-000](#) [9030-9523-502](#) [932A505](#) [PN2C](#) [A0407000](#) [R114703000](#) [R114703000W](#) [R114753000](#)  
[R125704000](#) [R125771001](#) [R127871001](#) [R141704000W](#) [R141710000W](#) [R141723161](#) [R141730000](#) [R141770000](#) [R142704000W](#)  
[R142720000](#) [R142720700](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161730000](#) [R161730000W](#) [R161753000W](#) [R161791530W](#)  
[R176770000](#) [R201705000](#) [R222705200](#) [R222M40010W](#) [R222M40050](#) [R223703020](#) [R223703080](#) [R223703180](#) [R316754000](#) [AD78TL](#)  
[HRM-513S](#) [1996352-2](#) [2157155-1](#) [2101130-1](#) [R114704000W](#) [R114720000W](#) [R125705000](#) [R125705001](#) [R125705701](#) [R125771000](#)  
[R125791501W](#) [R127703001](#)