

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.




REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
D2		RE-ACTIVATED PER ECO-17-009872	06JUL2017	DD AL

PERFORMANCE DATA

PARAMETERS	UNITS	VALUE FOR EV200 SERIES
Contact Arrangement: Power Contacts		1 Form X (SPST-NO-DM)
Rated Operating Voltage	Vdc	100 - 900
(NOTE: Voltages between 450 to 900 Vdc are capable but load dependent and require TE Engineering approval)		
Continuous (Carry) Current, Typical	A	500 @ 65°C, 400 mcm conductors
Consult factory for required conductors for higher (500+ A) currents		
Break Current at 320 Vdc	A	2,000, 1 cycle
Contact Resistance, Typical (@ 200A)	mohms	0.2
Load Life	Cycles	See Chart
Mechanical Life	Cycles	1,000,000
Operate Time @ 25°C		
Close (includes bounce), Typical	ms	15
Bounce (after close only), Max	ms	7
Release (includes arcing), Max @ 2000A	ms	12
Dielectric Withstand Voltage	Vrms	2,200 @ sea level (leakage < 1 mA)
Insulation Resistance @ 500 Vdc	megohms	100 (50 at end of life)
Shock, 11ms 1/2 sine, peak, operating	G	20
Vibration, sine, 80 - 200 Hz, peak	G	20
Operating Ambient Temperature	°C	-40° to +85°
Weight (Nominal)	lb [kg]	.95 [0.43]

COIL DATA	
Voltage (will operate)	9 - 36 Vdc
Voltage (Max)	36 Vdc
Pickup (close) Voltage (Max)	9 Vdc
Hold Voltage (Min)	7.5 Vdc
Dropout (open) Voltage (Min)	6 Vdc
Inrush Current (Max)	3.8A
Holding Current (Avg)	0.13A @ 12V
Inrush Time (Max)	130 ms

Coil Wire is 22AWG with 15.3 IN [390mm] Length

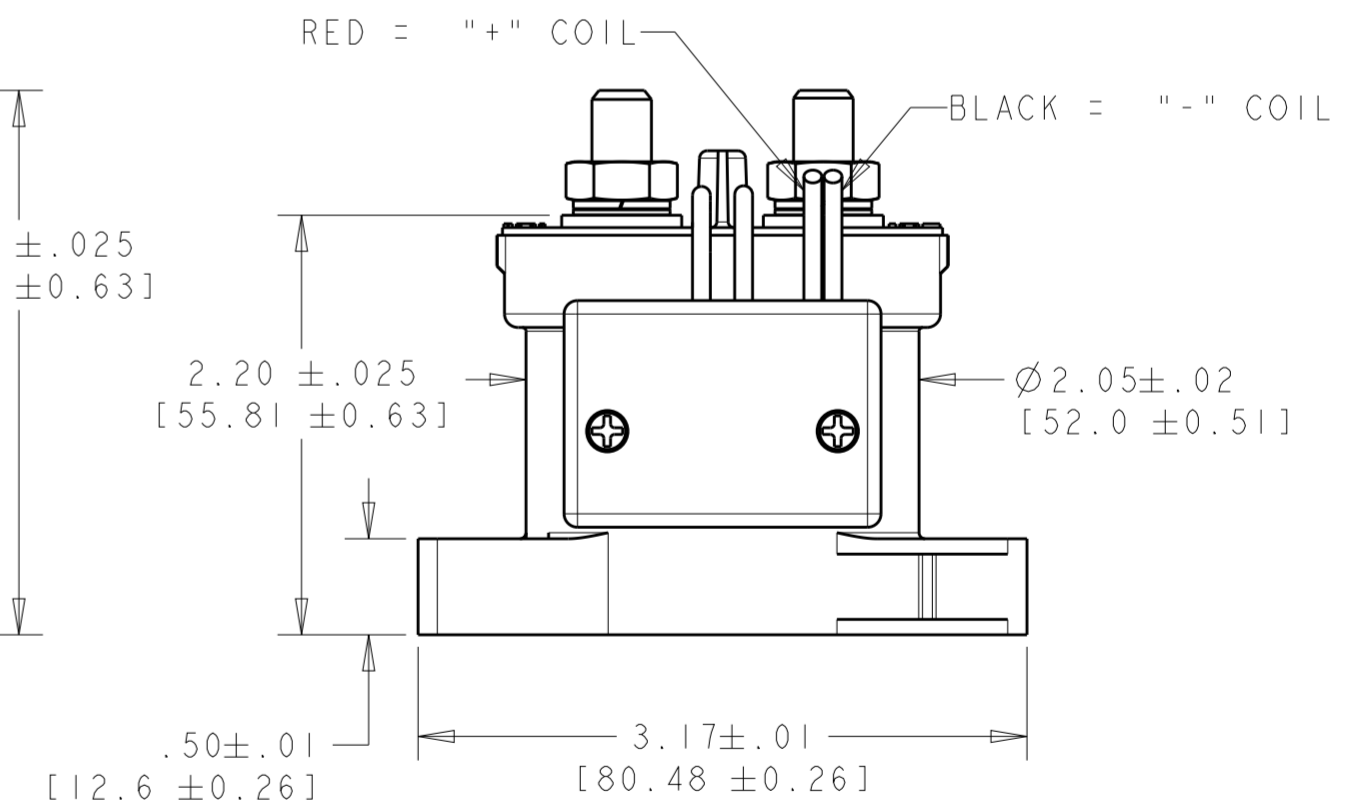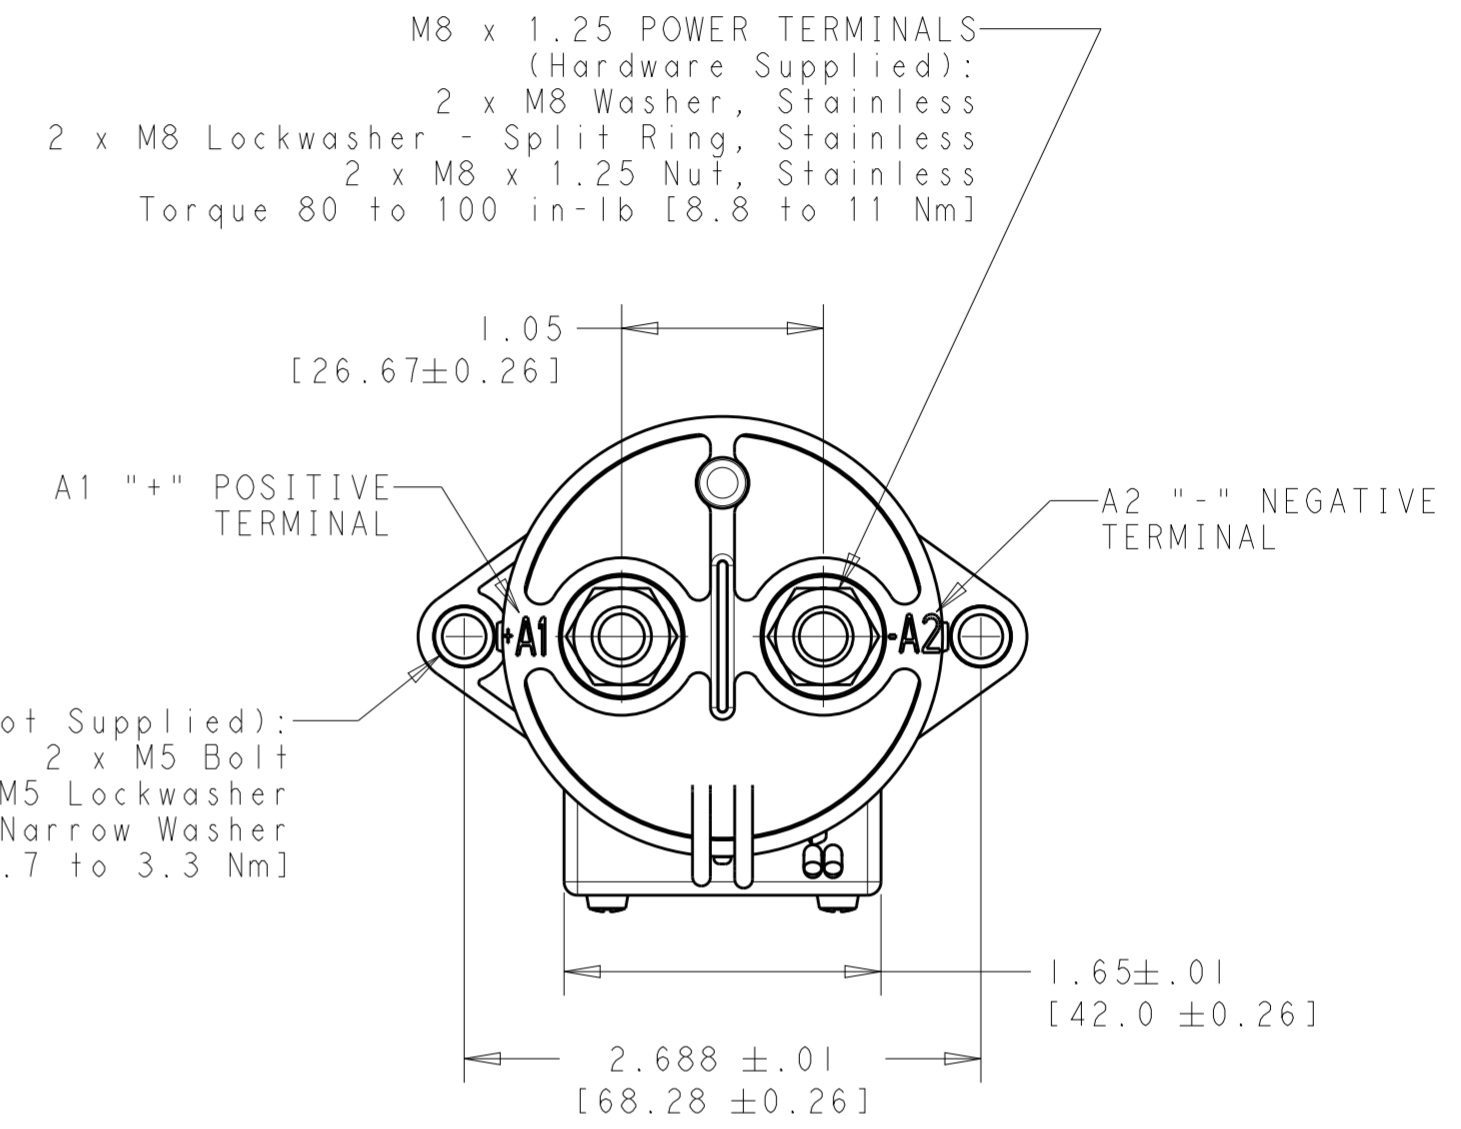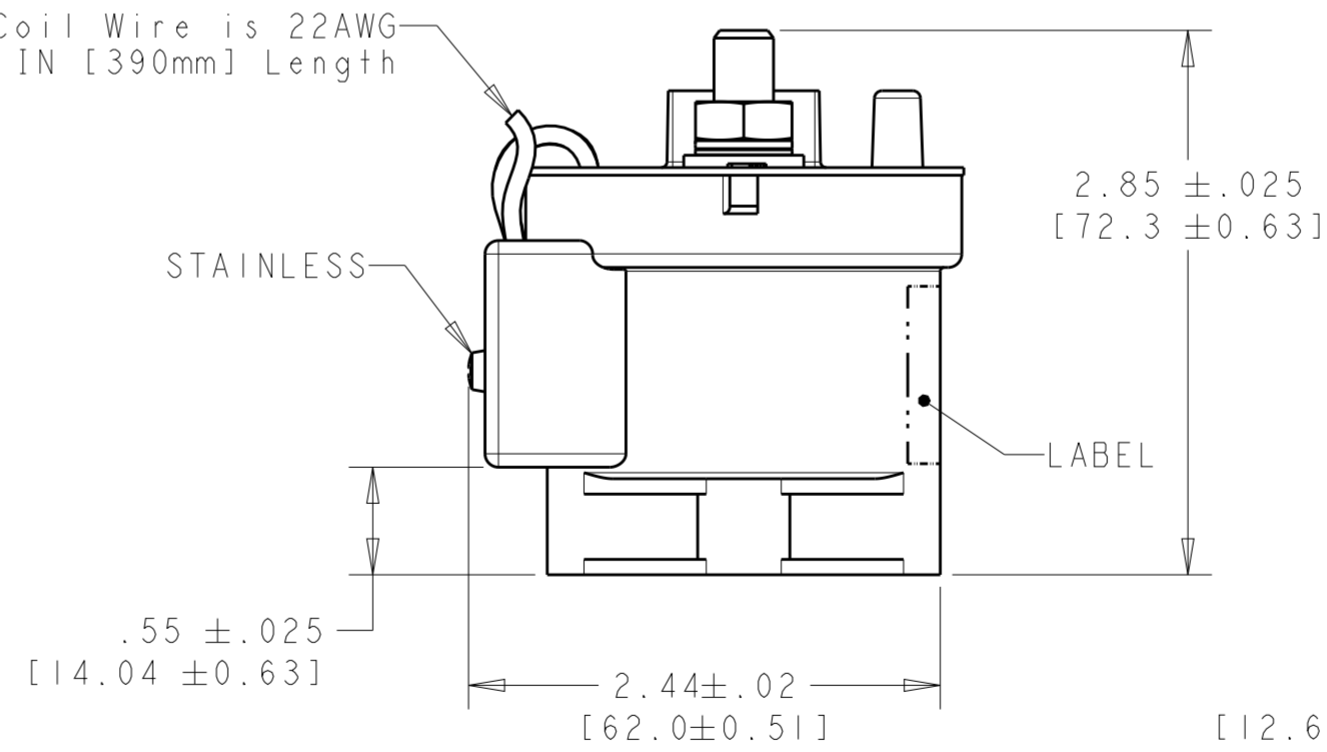

Mounting Hardware (Not Supplied):
 2 x M5 Bolt
 2 x M5 Lockwasher
 2 x M5 Narrow Washer
 Torque 15 to 30 in-lb [1.7 to 3.3 Nm]

- TO AVOID OVERHEATING, THE COIL ABOVE SHOULD NOT BE LEFT ON AT FULL POWER (12V) FOR A LONG PERIOD OF TIME.
- THE MINIMUM HOLD CURRENT OF 650mA (MENTIONED ABOVE) ONLY PRODUCES A T-RISE OF 20°C (MAX).
- FOR ANY OTHER INFORMATION, PLEASE REFER TO THE EV200 GENERAL CUSTOMER DATASHEET.

2098190-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A LEE 25MAY2010	TE Connectivity															
DIMENSIONS: INCHES		CHK A LEE 25MAY2010																
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A LEE 25MAY2010	NAME RELAY, EVC500 SPST-NO 12V															
<table border="1"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±.01</td></tr> <tr><td>2 PLC</td><td>±.005</td></tr> <tr><td>3 PLC</td><td>±.005</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±1°</td></tr> <tr><td>FINISH</td><td></td></tr> </table>		0 PLC	±	1 PLC	±.01	2 PLC	±.005	3 PLC	±.005	4 PLC	±	ANGLES	±1°	FINISH		PRODUCT SPEC -	SIZE A200779	
0 PLC	±																	
1 PLC	±.01																	
2 PLC	±.005																	
3 PLC	±.005																	
4 PLC	±																	
ANGLES	±1°																	
FINISH																		
MATERIAL		APPLICATION SPEC -	DRAWING NO C-2098190-1															
		WEIGHT -	RESTRICTED TO -															
		CUSTOMER DRAWING	SCALE 1:1 SHEET 1 OF 1 REV D2															

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [G5CE1ASIDC12](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#)
[1617057-2](#) [1617058-6](#) [1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [2-1617058-3](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#)
[AR4-15F11](#) [AR4-41F11](#) [24198-1](#) [4-1617057-0](#) [41FZ-200ACG-BSL](#) [5-1616920-2](#) [5-1617052-9](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-](#)
[1617346-8](#) [103-1AH-C-12VDC](#) [V23134A1052X299](#) [6-1393302-1](#) [897H-1AH-D-R1-U01-12VDC](#) [FTR-P3CP024W1-06](#) [1-1617057-8](#) [3-](#)
[1393305-1](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#)
[V23134M0052G242](#) [1393204-1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [2-1904020-1](#) [V23134B0052C642](#) [V23134B0053C642](#) [V23234-](#)
[A1001-X036](#)