

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED CSA CERTIFIED VDE APPROVED UL 1283 CSA 22.2, NO.0,0.4,8 VDE 565-3

## OPERATING SPECIFICATIONS:

LINE VOLTAGE/CURRENT: 20 AMP, 120/250 VAC 16 AMP./40°C, 250 VAC

MAX. LEAKAGE CURRENT, EACH: LINE TO GROUND:

.5 mA at 120V 60Hz .83 mA at 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C  $\alpha$  RATED CURRENT, I<sub>r</sub>

IN AN AMBIENT, Tg, HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, Ig, IS AS FOLLOWS:

 $I_0 = I_r - \sqrt{85 - I_0}$ 

## RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C
HUMIDITY: 21 DAYS 8 40°C 95% RH
CURRENT OVERLOAD TEST: 6 TIMES RATED CURRENT FOR 8 SECONDS

#### TEST SPECIFICATIONS:

INDUCTANCE: .88 mH NOMINAL CAPACITANCE: (MEASURED 0 1 KHz, 0.25VAC MAX., 25°C±1°C) LINE TO GROUND: .011 µF ±20% LINE TO LINE: .303 µF ±20% DISCHARGE RESISTOR: 580KΩ


LINE/GROUND AND LINE/LINE:  $6000\text{M}_{\Omega}$  (MIN) AT 100VDC INSULATION RESISTANCE:  $20^{\circ}\text{C}$  AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINES TO GROUND: 2250 VDC FOR 1 MINUTE
LINE TO LINE: 1450 VDC FOR 1 MINUTE

# FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

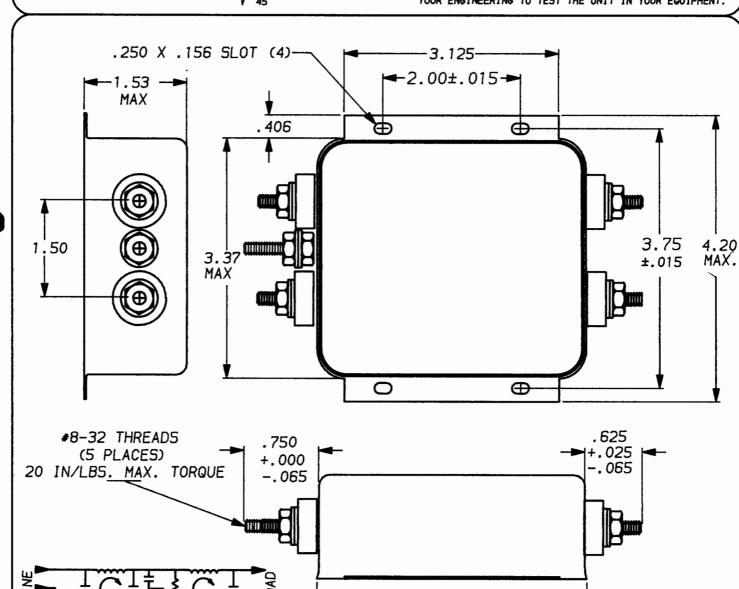

50a - 50a (MINIMUM) INSERTION LOSS													UNLESS OTHERWISE SPECIFIED,		
EQUENCY MHz	. 15	.э	.5	1	2	5	10	20	30	1	1	1		(a)	LIBERTYVILLE, IL 60048
OMMON	11	33	50	65	65	65	65	60	60	1	1	7	This document is proprietary to CORCOM INC.	POWE	R LINE FILTER
DIFF.	Ι-	1-	1.5	-		_	-		-	<del>                                     </del>	-	٠,	[	DATE: 9-30-93	CATALOG NO.
d₿	3	3	15	65	65	65	60	52	52	<u></u>	_	Ľ	prior written consent.		
														CAD	0. 20VR6.05
	EQUENCY MHz OMMON dB DIFF.	EQUENCY .15 OMMON dB 11 OIFF. 3	EQUENCY .15 .3 OMMON 11 33 DIFF. 2 3	EQUENCY .15 .3 .5 OMMON dB 11 33 50 DIFF. 3 3 15	EQUENCY .15 .3 .5 1  OMMON 11 33 50 65  DIFF. 3 3 15 65	EQUENCY .15 .3 .5 1 2  OMMON	EQUENCY .15 .3 .5 1 2 .5	EQUENCY .15 .3 .5 1 2 5 10  OMMON	EQUENCY .15 .3 .5 1 2 5 10 20 OMMON 11 33 50 65 65 65 65 60 DIFF. 3 3 15 55 65 65 65 60 53	EQUENCY .15 .3 .5 1 2 5 10 20 30 OMMON 11 33 50 65 65 65 65 60 60 DIFF. 3 3 15 65 65 65 65 60 50 53 53	EQUENCY .15 .3 .5 1 2 .5 10 20 30 / MH1z OMMON	EQUENCY .15 .3 .5 1 2 .5 10 20 30 / / MHz OMMON	EQUENCY .15 .3 .5 1 2 5 10 20 30 / / / MHz OMMON dB 11 33 50 65 65 65 65 60 60 / / /	EQUENCY .15 .3 .5 1 2 5 10 20 30 / / / MATERIAL & FINISH: AS SUPPLIED OMMON dB 11 33 50 65 65 65 65 60 60 / / / This document is proprietary to CORCOM INC. and is not to be reproduced nor used for	FOUNCY .15 .3 .5 1 2 5 10 20 30 / / / MATERIAL & FINISH: AS SUPPLIED OMMON 11 33 50 65 65 65 65 60 60 / / / This document is proprietary to CORCOM INC. and is not to be reproduced nor used for DATE: 0.30.03

-3.945 MAX-

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B
1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200

20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1

FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44

FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6