


- 1 MOLDED PARTS: POLYESTER, UL RATED 94V-0, BLACK. CONTACTS: BERYLLIUM COPPER.
- 2 2.54 μm [.000100] MIN TIN-LEAD ON TERMINATION END, 0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27 μm [.000050] MIN NICKEL.
- 3 POSITION TOLERANCE APPLIES 0.76 [.030] ABOVE DATUM V.
- 4 POSITION NUMBER 1 INDICATOR.
- 5 ELECTRICAL ENGAGEMENT ZONE.
- 6 RECOMMENDED 28 AWG RIBBON CABLE, 0.61 - 0.97 [.024 - .038] THICK PVC, 1.0000 [.03937] PITCH. AMP LOGO ORIENTATION IS OPTIONAL.
- 7 RECESS ON EACH END, OPPOSITE CORNER.
- 8 0.13 μm [.000005] MIN GOLD ON TERMINATION END, 0.76 μm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27 μm [.000050] MIN NICKEL.
- 10 MOLD GATE PROJECTION ON EITHER END OF COVER TO BE EXCLUDED FROM DIMENSION 'B' MEASUREMENT.

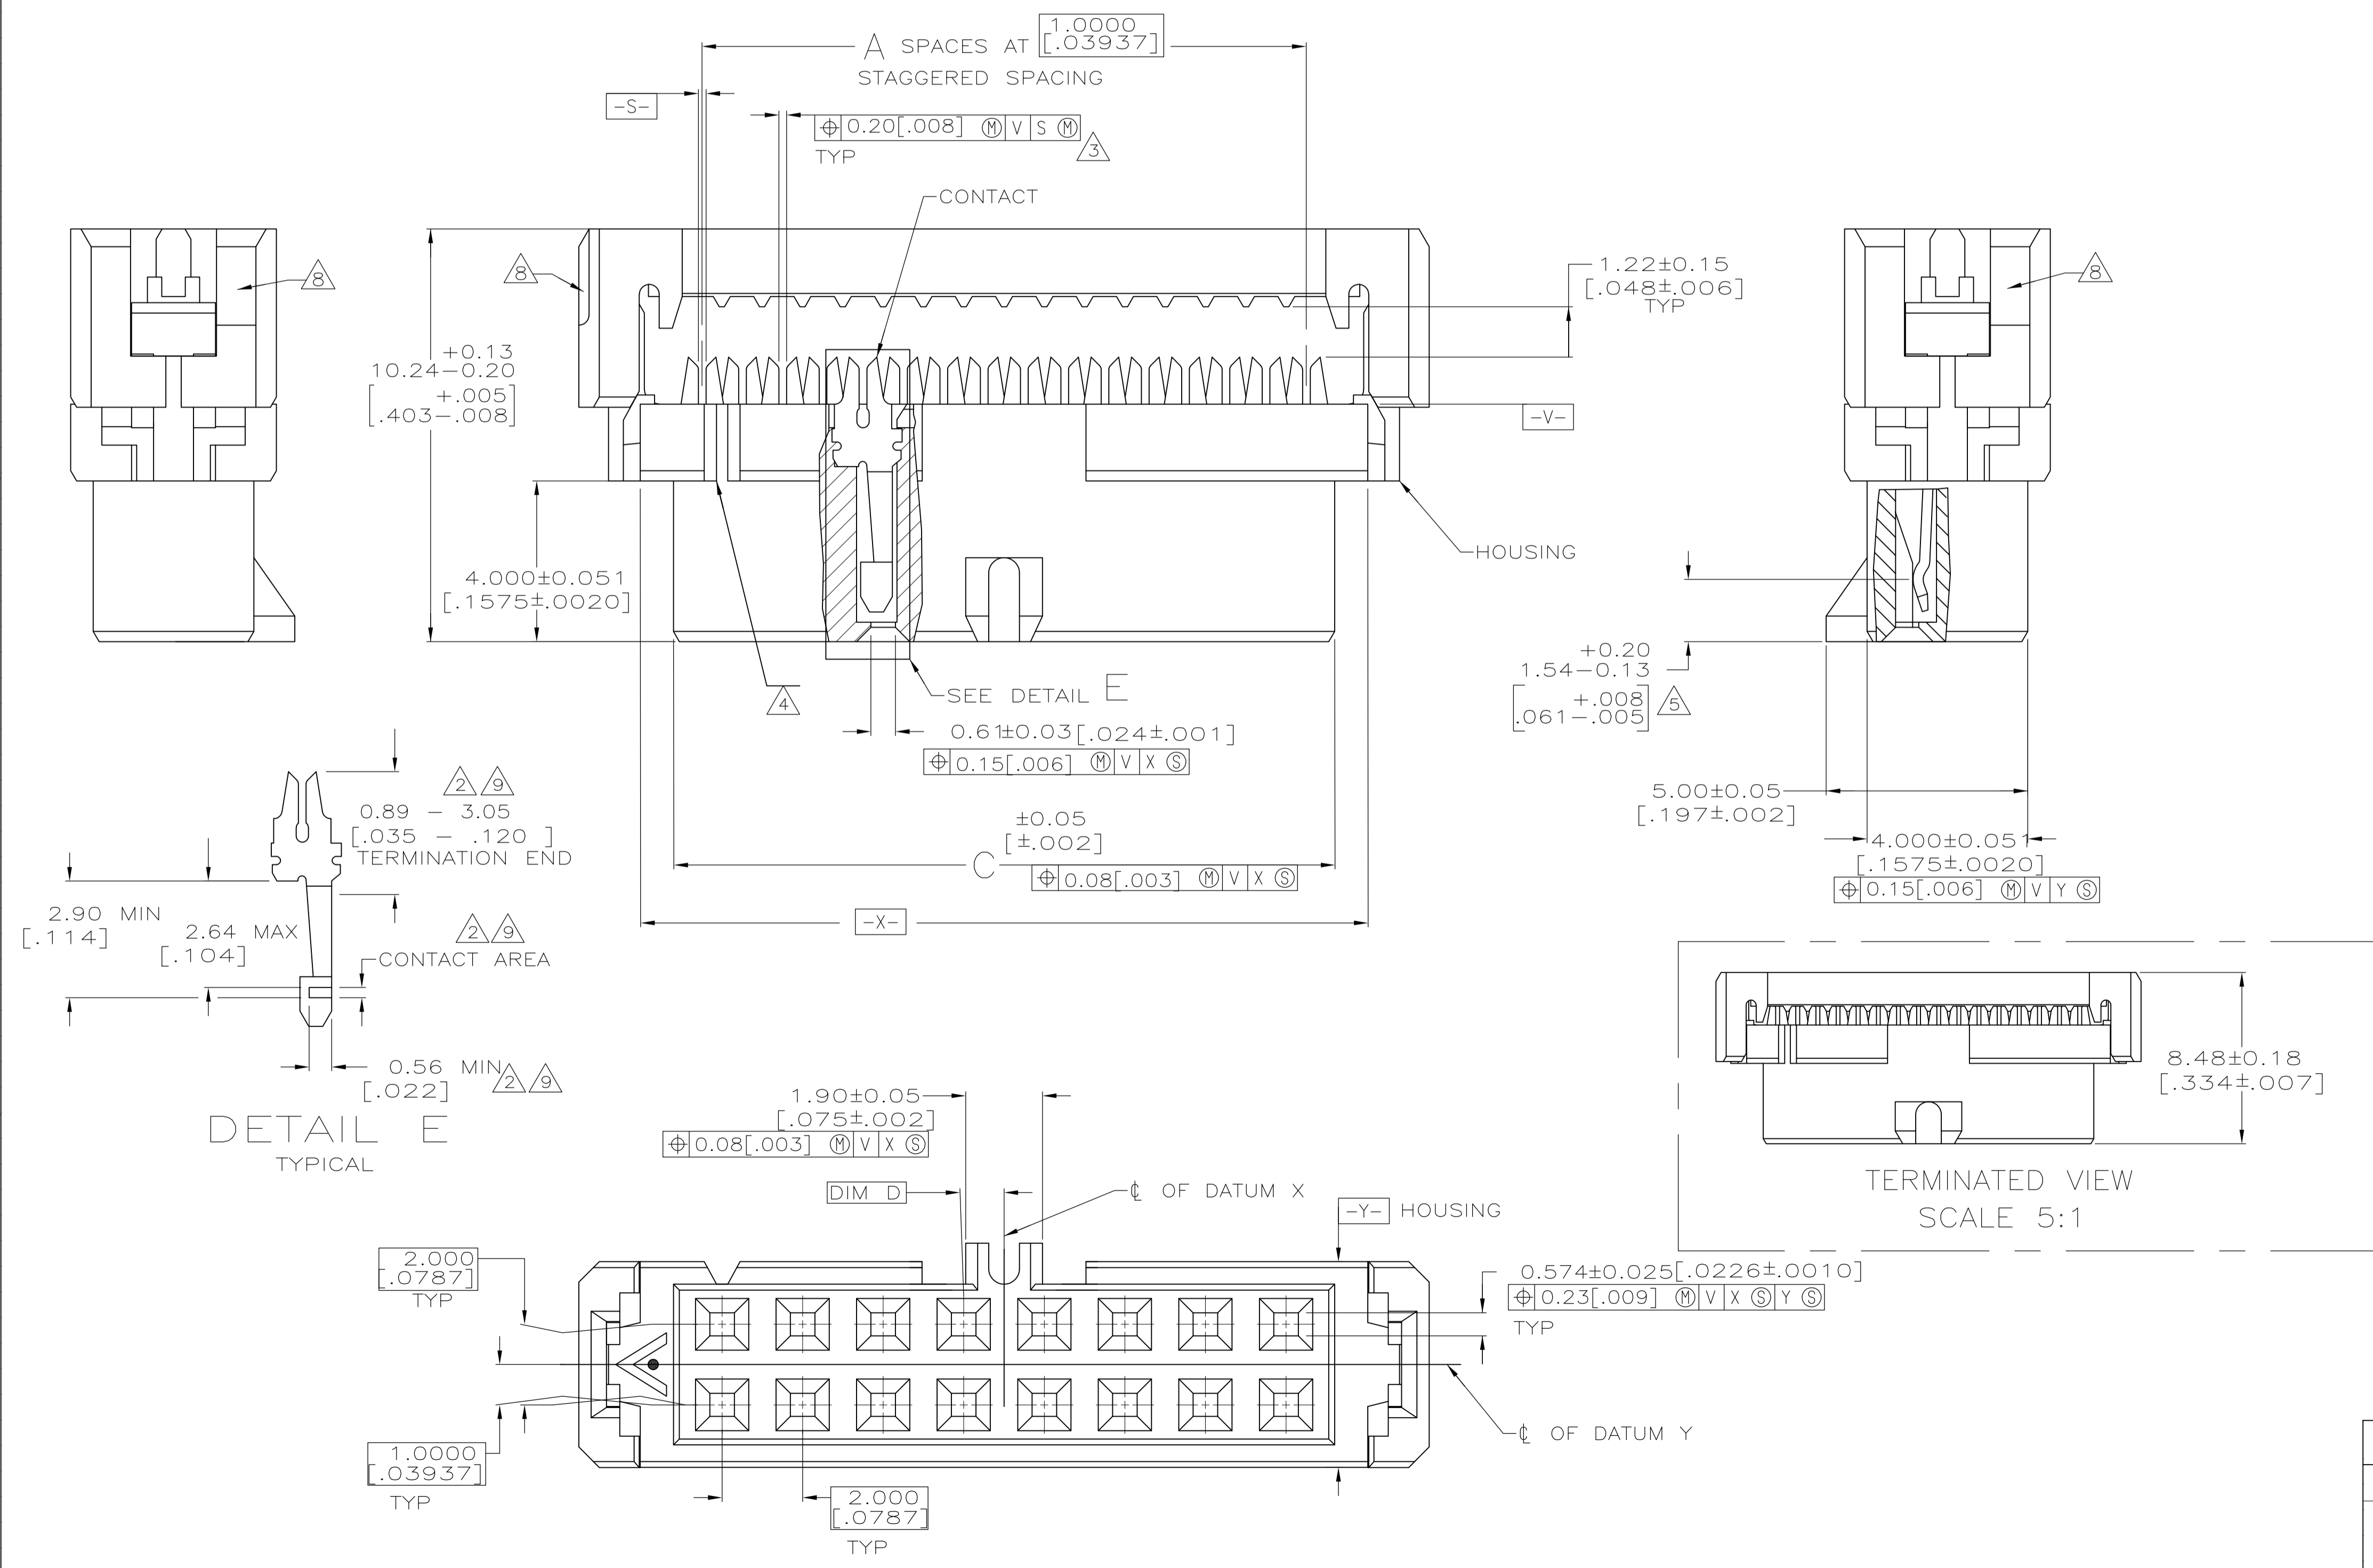

REV	DESCRIPTION	DATE	BY	APVD			
1	1.0000	12.40	17.15	11	12	3-111623-1	
2	1.0000	8.41	13.18	7	8	3-111623-0	
3	0.0000	22.40	27.18	21	22	2-111623-9	
4	0.0000	34.42	39.17	33	34	2-111623-8	
5	1.0000	24.41	29.18	23	24	2-111623-7	
6	0.0000	50.39	55.17	49	50	2-111623-6	
7	1.0000	44.40	49.17	43	44	2-111623-5	
8	1.0000	40.41	45.19	39	40	2-111623-4	
9	0.0000	30.40	35.18	29	30	2-111623-3	
10	0.0000	26.42	31.17	25	26	2-111623-2	
11	1.0000	20.40	25.17	19	20	2-111623-1	
12	1.0000	16.41	21.18	15	16	2-111623-0	
13	0.0000	14.40	19.18	13	14	1-111623-9	
14	0.0000	10.41	15.16	9	10	1-111623-8	
15	1.0000	12.40	17.15	11	12	1-111623-7	
16	1.0000	8.41	13.18	7	8	1-111623-6	
17	0.0000	22.40	27.18	21	22	1-111623-5	
18	1.0000	68.40	73.18	67	68	1-111623-4	
19	1.0000	64.41	69.16	63	64	1-111623-3	
20	1.0000	60.40	65.18	59	60	1-111623-2	
21	0.0000	50.39	55.17	49	50	1-111623-1	
22	1.0000	44.40	49.17	43	44	1-111623-0	
23	1.0000	40.41	45.19	39	40	111623-9	
24	0.0000	34.42	39.17	33	34	111623-8	
25	0.0000	30.40	35.18	29	30	111623-7	
26	0.0000	26.42	31.17	25	26	111623-6	
27	1.0000	24.41	29.18	23	24	111623-5	
28	0.0000	20.40	25.17	19	20	111623-4	
29	0.0000	16.41	21.18	15	16	111623-3	
30	0.0000	14.40	19.18	13	14	111623-2	
31	0.0000	10.41	15.16	9	10	111623-1	
32	CONTACT FINISH	D	C	B	A	NO OF POSN	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm [INCHES]. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±, 2 PLC ±, 3 PLC ± 0.08 [.003], 4 PLC ±, ANGLES ±. MATERIAL: CONTACTS: SEE TABLE. FINISH: CONTACTS: SEE TABLE.

DIN C. OBERMAN 02-21-92
 CHK: J. McCLINTON 3-9-92
 NAME: RECEPTACLE ASSY, POLARIZED, 2mm CL, AMP-LATCH
 PRODUCT SPEC: 108-1372
 APPLICATION SPEC: A1 00779 C=111623
 WEIGHT: A1 00779 C=111623
 CUSTOMER DRAWING SCALE 10:1 SHEET 1 of 1 REV L2

STE TE Connectivity

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)