


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	A	RELEASED PER ECO-11-003853	24FEB2011	RJM3 DHW

COMPONENT	MATERIAL	FINISH
HOUSING COUPLING NUT CAP	STAINLESS STEEL PER ASTM-A-484 OR ASTM-A-582 TYPE 303	GOLD PLATED PER ASTM-B-488
DIELECTRIC	TORLON	NONE
CENTER CONTACT	BRASS PER ASTM B16 HALF HARD	GOLD PLATED PER ASTM-B-488
RETAINING RING	BERYLLIUM COPPER PER ASTM-B-194	NONE
GASKET	SILICONE RUBBER PER ZZ-R-765	NONE
FERRULE	SOFT COPPER ALLOY	GOLD PLATED PER ASTM-B-488

ABSOLUTE INSERTION PHASE PER TABLE
 AND A TEMPERATURE OF +25°C

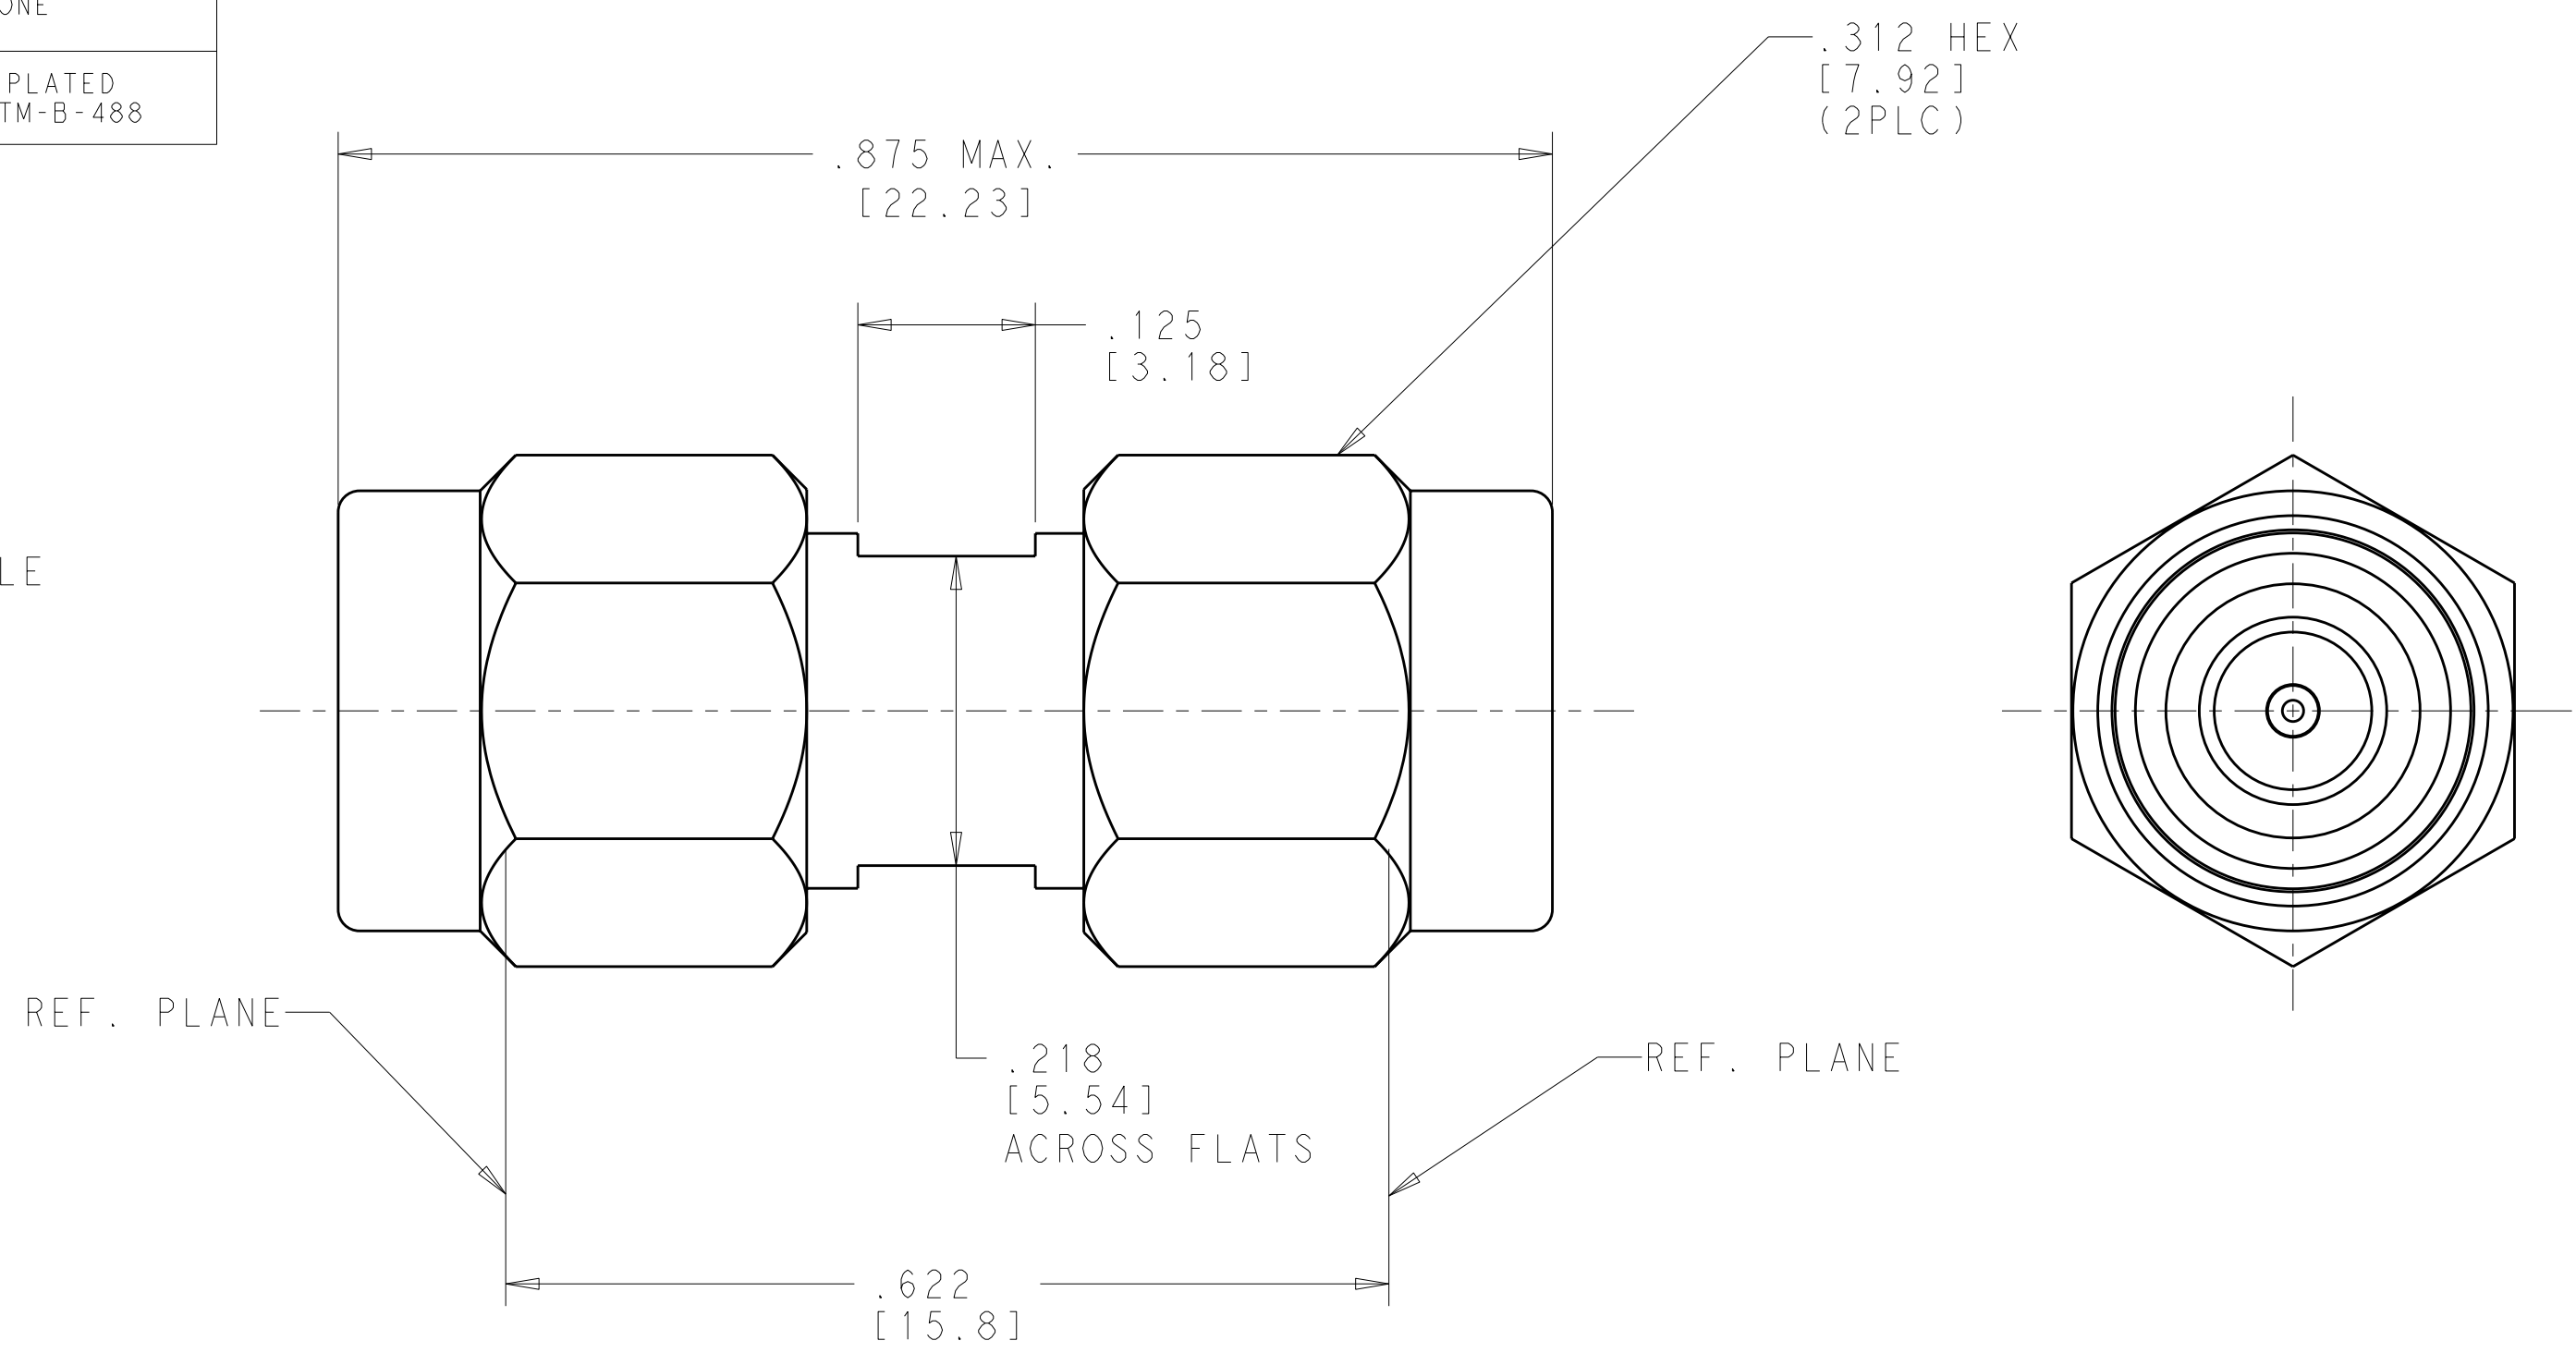

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
NOM. IMPEDANCE (OHMS) 50 ±1	Interface Dimensions MIL-STD-348A FIG. 310.1	TEMP. RATING -65° TO +165°C
Freq. Range (GHz) DC to 3.0	Mating Characteristics:	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level 335	Insertion (MAX Lbs) 3	Shock MIL-STD-202, Method 213 Condition 1
VSWR 1.08+.005f(GHz) DC to 3 GHz	Withdrawal (MIN Oz) 1	
Insertion Loss (db Max) .06x SQRT.f(GHz)	Force to Engage (In-Lbs MAX) 2.0	Moisture Resistance MIL-STD-202 Method 106
RF Leakage (db MIN) (Interface Only, Fully Mated) -(90-f(GHz))	Center Contact Captivation	Corrosion - MIL-STD-202, Method 101, Condition B
Corona, 70,000Ft.(VRMS MIN) 250	Axial (Lbs) 6	
Dielectric Withstanding Voltage (VRMS MIN)@ Sea Level 1000		
Contact Resistance (Millohms MAX) Center Contact 4.0		
Outer Contact 2.0		
Cable to Housing 0.5		
RF High Potential @ Sea Level (VRMS MIN @ 5MHz) 670		
IR (Megohms MIN) 5000		

-33°±0.5°	2157155-2
-30°±0.5°	2157155-1
INSERTION PHASE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DWN RJM3 24FEB2011	Tyco Electronics Corporation Harrisburg, PA 17105-3608
CHK DHW 24FEB2011	
APVD DHW 24FEB2011	
PRODUCT SPEC	
NAME SMA IN-SERIES ADAPTER PLUG TO PLUG PHASE MATCHED	
APPLIC. SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO
WEIGHT	A200779 C-2157155
CUSTOMER DRAWING	SCALE 15:1 SHEET 1 OF 1 REV A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[5919-1503-000](#) [5919-9503-000](#) [651A505](#) [7122-1502-000](#) [9030-9523-502](#) [932A505](#) [PN2C](#) [A0407000](#) [R114703000](#) [R114703000W](#)
[R114753000](#) [R125704000](#) [R127871001](#) [R141704000W](#) [R141710000W](#) [R141723161](#) [R141730000](#) [R141770000](#) [R142704000W](#)
[R142720000](#) [R142720700](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161730000](#) [R161730000W](#) [R161753000W](#) [R161791530W](#)
[R176770000](#) [R201705000](#) [R222705200](#) [R222M40010W](#) [R222M40050](#) [R223703020](#) [R223703080](#) [R300.124.403](#) [R316754000](#) [AD78TL](#)
[HRM-513S](#) [1996352-2](#) [2157155-1](#) [2101130-1](#) [R114704000W](#) [R114720000W](#) [R125705000](#) [R125705001](#) [R125705701](#) [R125771000](#)
[R125791501W](#) [R127703001](#)