
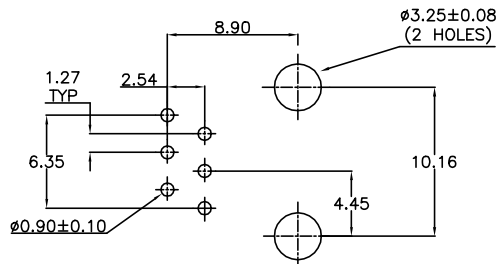
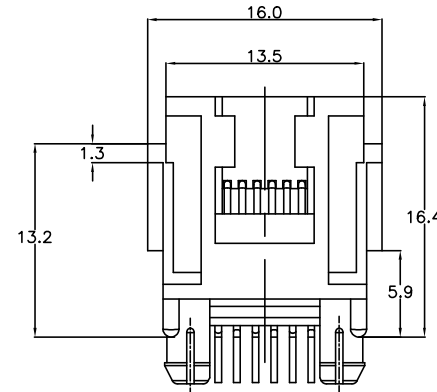
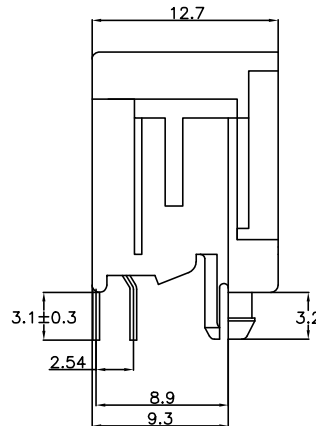
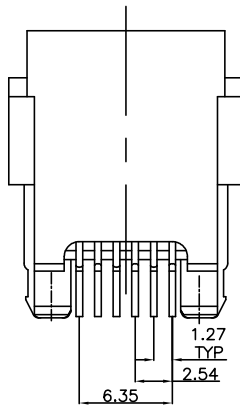


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
J7		ECO-19-018009 (SEE PAGE NO 3)	18SEP2019	RR	SH


NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064



PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 6 CONTACTS.	IN CONTACT AREA: 1.2 μ m MIN. SEL. GOLD OVER 1.2 μ m MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK	216548-1
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER
		SOLDER TINES: 2.0 μ m MIN. TIN OVER 1.2 μ m MIN. NICKEL	CONTACTS: PHOSPHOR BRONZE	






THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.V. LIEMPT	22JAN92	TE Connectivity																						
DIMENSIONS: mm		CHK C. STERKEN	APVD L.V. SOEST	NAME																						
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		MODULAR JACK, 6 POS. TOP ENTRY, SMALL SIZE WITH PANEL STOPS, FOR PCB																						
<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>-</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	-	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	FINISH	±	-	APPLICATION SPEC		RESTRICTED TO	
0 PLC	±	-																								
1 PLC	±	-																								
2 PLC	±	-																								
3 PLC	±	-																								
4 PLC	±	-																								
ANGLES	±	-																								
FINISH	±	-																								
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO ©=216548																					
CUSTOMER DRAWING			SCALE	SHEET	REV																					

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LT/R	DESCRIPTION	DATE	DNW	APVD
-	-	SEE SHEET 1	-	-	-


NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064

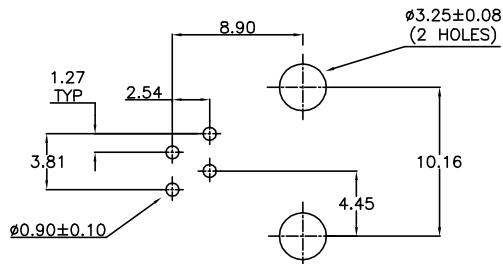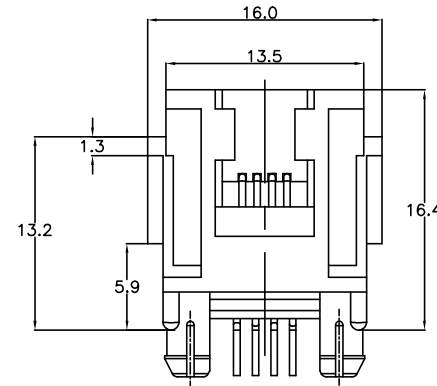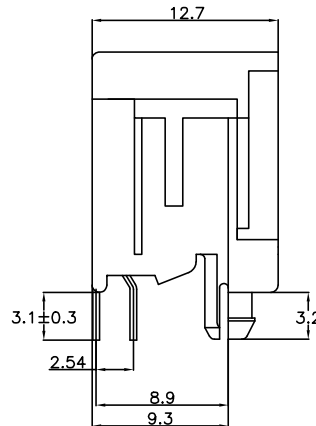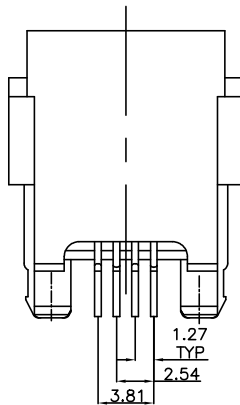

PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2 μ m MIN. SEL. GOLD OVER 1.2 μ m MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK	216548-2
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER
		SOLDER TINES: 2.0 μ m MIN. TIN OVER 1.2 μ m MIN. NICKEL	CONTACTS: PHOSPHOR BRONZE	




THIS DRAWING IS A CONTROLLED DOCUMENT.		DNW J.V. LIEMPT 22JAN92	TE Connectivity																									
DIMENSIONS: mm		CHK C. STERKEN	NAME																									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V. SOEST	MODULAR JACK, 6 POS. TOP ENTRY, SMALL SIZE WITH PANEL STOPS, FOR PCB																									
<table border="1"> <tr><td>0</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>1</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>2</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>3</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td>4</td><td>PLC</td><td>±</td><td>-</td></tr> <tr><td></td><td>ANGLES</td><td>±</td><td>-</td></tr> </table>		0	PLC	±	-	1	PLC	±	-	2	PLC	±	-	3	PLC	±	-	4	PLC	±	-		ANGLES	±	-	PRODUCT SPEC	SIZE	CAGE CODE
0	PLC	±	-																									
1	PLC	±	-																									
2	PLC	±	-																									
3	PLC	±	-																									
4	PLC	±	-																									
	ANGLES	±	-																									
MATERIAL SEE TABLE		APPLICATION SPEC	A2	00779																								
FINISH SEE TABLE		WEIGHT	DRAWING NO ©=216548																									
		CUSTOMER DRAWING	SCALE	SHEET 2 of 3																								
			REV	J7																								

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

NOTES:

1. TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.15
2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064

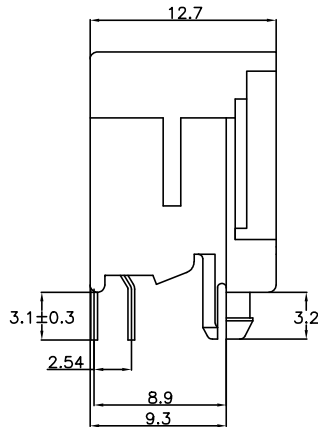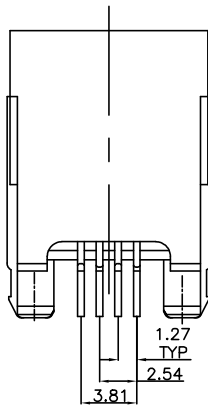


Ⓝ ONLY VIEW UPDATED

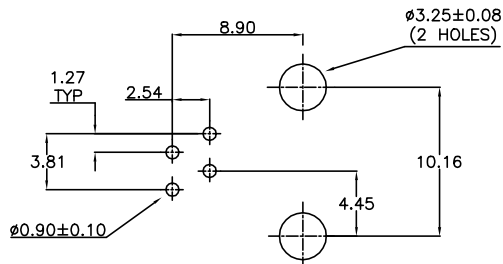

PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
 TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.05
 PRINTED CIRCUIT BOARD THICKNESS: 1.6 mm NOMINAL.



240 PCS. IN ONE TRAY	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE	1-216548-5
240 PCS. IN ONE TRAY	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-V0 COLOR: GRAY CONTACTS: PHOSPHOR BRONZE	216548-6
800 PCS. ON A 60cm. DIA. REEL	6 POSITIONS/ 4 CONTACTS.	IN CONTACT AREA: 1.2μm MIN. SEL. GOLD OVER 1.2μm MIN. NICKEL SOLDER TINES: 2.0μm MIN. TIN OVER 1.2μm MIN. NICKEL	HOUSING: PBT,UL 94V-HB COLOR: BLACK CONTACTS: PHOSPHOR BRONZE	216548-5
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 22JAN92

CHK L.V.LIEMPT

CHK C.STERKEN

APVD L.V.SOEST

PRODUCT SPEC

APPLICATION SPEC

FINISH

WEIGHT

CUSTOMER DRAWING

TE Connectivity



MODULAR JACK, 6 POS. TOP ENTRY,
 SMALL SIZE WITHOUT PANEL STOPS,
 FOR PCB

SIZE A2 CAGE CODE 00779 DRAWING NO. C=216548

RESTRICTED TO

SCALE - SHEET 3 of 3 REV J7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors / Ethernet Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHJ-4P4C-1-V-4](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDLX-SMT-S-88](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [E5288-S000K3-L](#) [E5908-15A242-L](#)