




BLADE TERMINALS DIN 46 244-A6,3-0,8

TERMINAL 30 COPPER TIN PLATED
 TERMINAL 85 AND 86 BRASS TIN PLATED
 TERMINAL 87 AND 87a COPPER TIN PLATED


DEGREE OF PROTECTION ACC. TO IEC529 = DIN 40 050 Teil 9

CUT EDGES WITHOUT TIN PLATING ALLOWED


TERMINALS IP 20
 HOUSING IP 5K4
 IN CONNECTION WITH A CONNECTOR HOUSING
 MOUNTING POSITION: TERMINALS SHALL POINT DOWNWARDS

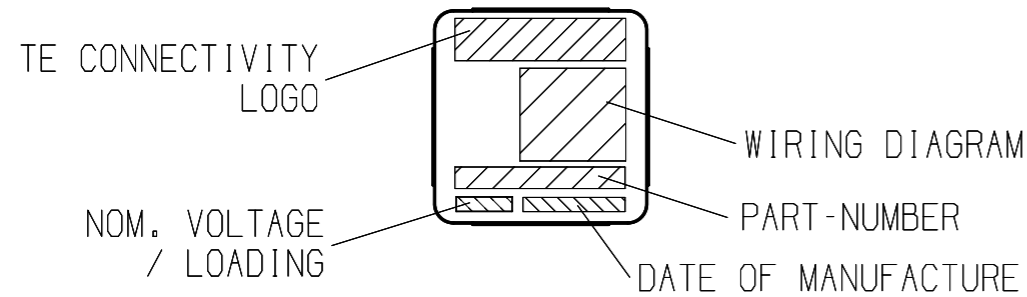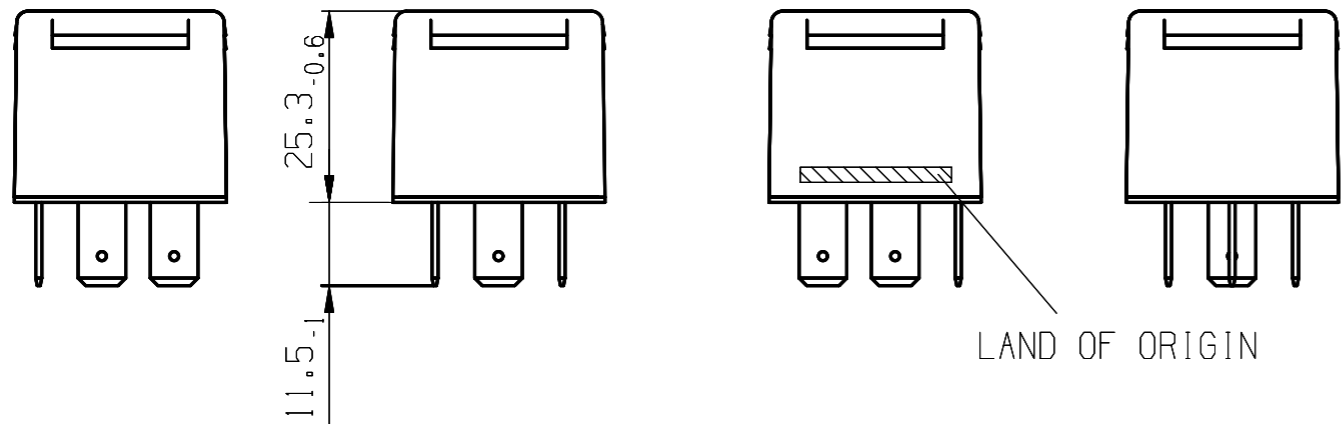

TERMINAL CONFIGURATION

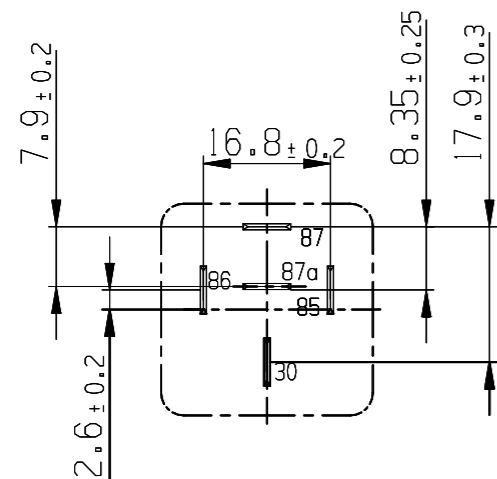

WIRING DIAGRAM



ATTENTION ! POLARITY

PART	MATERIAL	COLOUR
HOUSING	PA 66 GF 30±10 [%]	BLACK
BASE PLATE	PA 66 GF 30±10 [%]	BLACK

OBSOLETE BOSCH P/N	TE CONNECTIVITY P/N	REV	PART NUMBER	CUSTOMER P/N
0 332 209 135	0-1904020-1		V23234-A0001-X030	
	1-1904020-1			
	2-1904020-1			
	3-1904020-1			
	4-1904020-1			

PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.	CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD	PAPER SIZE A3
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------	-------------------------

APPLICABLE SPEC.:	FINISH	DIMENSIONS APPLY	PLATING
TOLERANCE UNLESS SPECIFIED OTHERWISE	SCALE 1:1	WEIGHT Ca. 34g	
DIMENSIONS IN MM	MATERIAL	PART NAME	

REV.	CHANGE ORDER	DATE	APP.	DATE	NAME	PART NAME
B1	ECO-17-013099	05SEP2017	LSand	DWN.	2006-06-05	P. Tomas
B	ECO-12-005342	19MAR2012	A.P.	APP.		
A4	INITIAL VERSION	2007-10-01	PTom	REV.		
A3	---	2007-03-05	---	LOCATION	AMR PE EVORA	
A2	---	2007-02-22	---			
A1	---	2007-02-02	---			
A	---	2006-11-08	---			



**MINI RELAY B
 CHANGEOVER / 12V**

DWG NO. **V23234-A0001-X030**


SHT. **1**
 OF **2**

CLASS 3

CUSTOMER DRAWING

Nominal voltage (load and excitation circuit)	12 V
Permissible operating voltage	8...16 V
Permissible ambient temperature	-40...100 ° C
Response voltage (at 20 ° C)	≤ 8 V
Release voltage (at 20 ° C)	1.2...5.0 V
Response time	≤ 10 ms
Release time	≤ 15 ms
Contact material	Silver based
Equivalent coil resistance at terminal 85-86	85± 5Ω
Changeover contact: Voltage drop at blade terminals at a measuring current of 10 ± 0.5 A	
Normally Open Contact, Terminal 30-87 in new condition	Typically ≤50mV, Max. 300mV
After life test	Typically ≤80mV, Max. 300mV
Normally Closed Contact, Terminal 30-87a in new condition	Typically ≤70mV, Max. 300mV
After life test	Typically ≤120mV, Max. 300mV

Electrical Endurance	
Resistive Load 50A on NO	≥ 50.000 cycles
Resistive Load 30A on NO	≥ 100.000 cycles
Resistive Load 20A on NC	≥ 50.000 cycles



PROPRIETARY THE REPRODUCTION, TRANSMISSION OR USE OF THIS DOCUMENT OR IT'S CONTENTS IS NOT PERMITTED WITHOUT EXPRESSED WRITTEN AUTHORITY. OFFENDERS WILL BE LIABLE FOR ALL DAMAGES. ALL RIGHTS, INCLUDING RIGHTS CREATED BY REGISTERED PATENT(S) GRANTED FOR A UTILITY MODEL OR DESIGN, ARE RESERVED.				CHANGES TO THIS DRAWING MUST BE DONE ONLY IN CAD		PAPER SIZE A3	
APPLICABLE SPEC.:				FINISH			
TOLERANCE UNLESS SPECIFIED OTHERWISE				DIMENSIONS IN MM		DIMENSIONS APPLY PLATING	
SCALE 1:1				WEIGHT Ca. 34g			
MATERIAL				PART NAME MINI RELAY B CHANGEOVER / 12V			
DATE NAME B1 ECO-17-013099 05SEP2017 LSand DWN. 2006-06-05 P. Tomas B ECO-12-005342 19MAR2012 A.P. APP. A4 INITIAL VERSION 2007-10-01 PTom REV. A3 --- 2007-03-03 --- LOCATION AMR PE EVORA A2 -- 2007-02-22 --- A1 --- 2007-02-02 --- A --- 2008-11-08 ---				DWG NO. V23234-A0001-X030		SHT. 2 OF 2	
REV. CHANGE ORDER		DATE		APP.		CLASS 3	
CUSTOMER DRAWING				CUSTOMER DRAWING			



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [G5CE1ASIDC12](#) [1393204-2](#) [1393302-3](#) [13Z99A115-0074](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#)
[1617057-2](#) [1617058-6](#) [1617518-5](#) [2-1617057-2](#) [2-1617057-6](#) [2-1617058-3](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#)
[AR4-15F11](#) [AR4-41F11](#) [24198-1](#) [4-1617057-0](#) [41FZ-200ACG-BSL](#) [5-1616920-2](#) [5-1617052-9](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-](#)
[1617346-8](#) [103-1AH-C-12VDC](#) [V23134A1052X299](#) [6-1393302-1](#) [897H-1AH-D-R1-U01-12VDC](#) [FTR-P3CP024W1-06](#) [1-1617057-8](#) [3-](#)
[1393305-1](#) [5436-0001-HS](#) [V23086-R1851-A502](#) [V23136-A0004-X075](#) [898H-1AH-D1SW-R1-12VDC](#) [RH4C1P2607](#) [RE031005](#)
[V23134M0052G242](#) [1393204-1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [2-1904020-1](#) [V23134B0052C642](#) [V23134B0053C642](#) [V23234-](#)
[A1001-X036](#)