

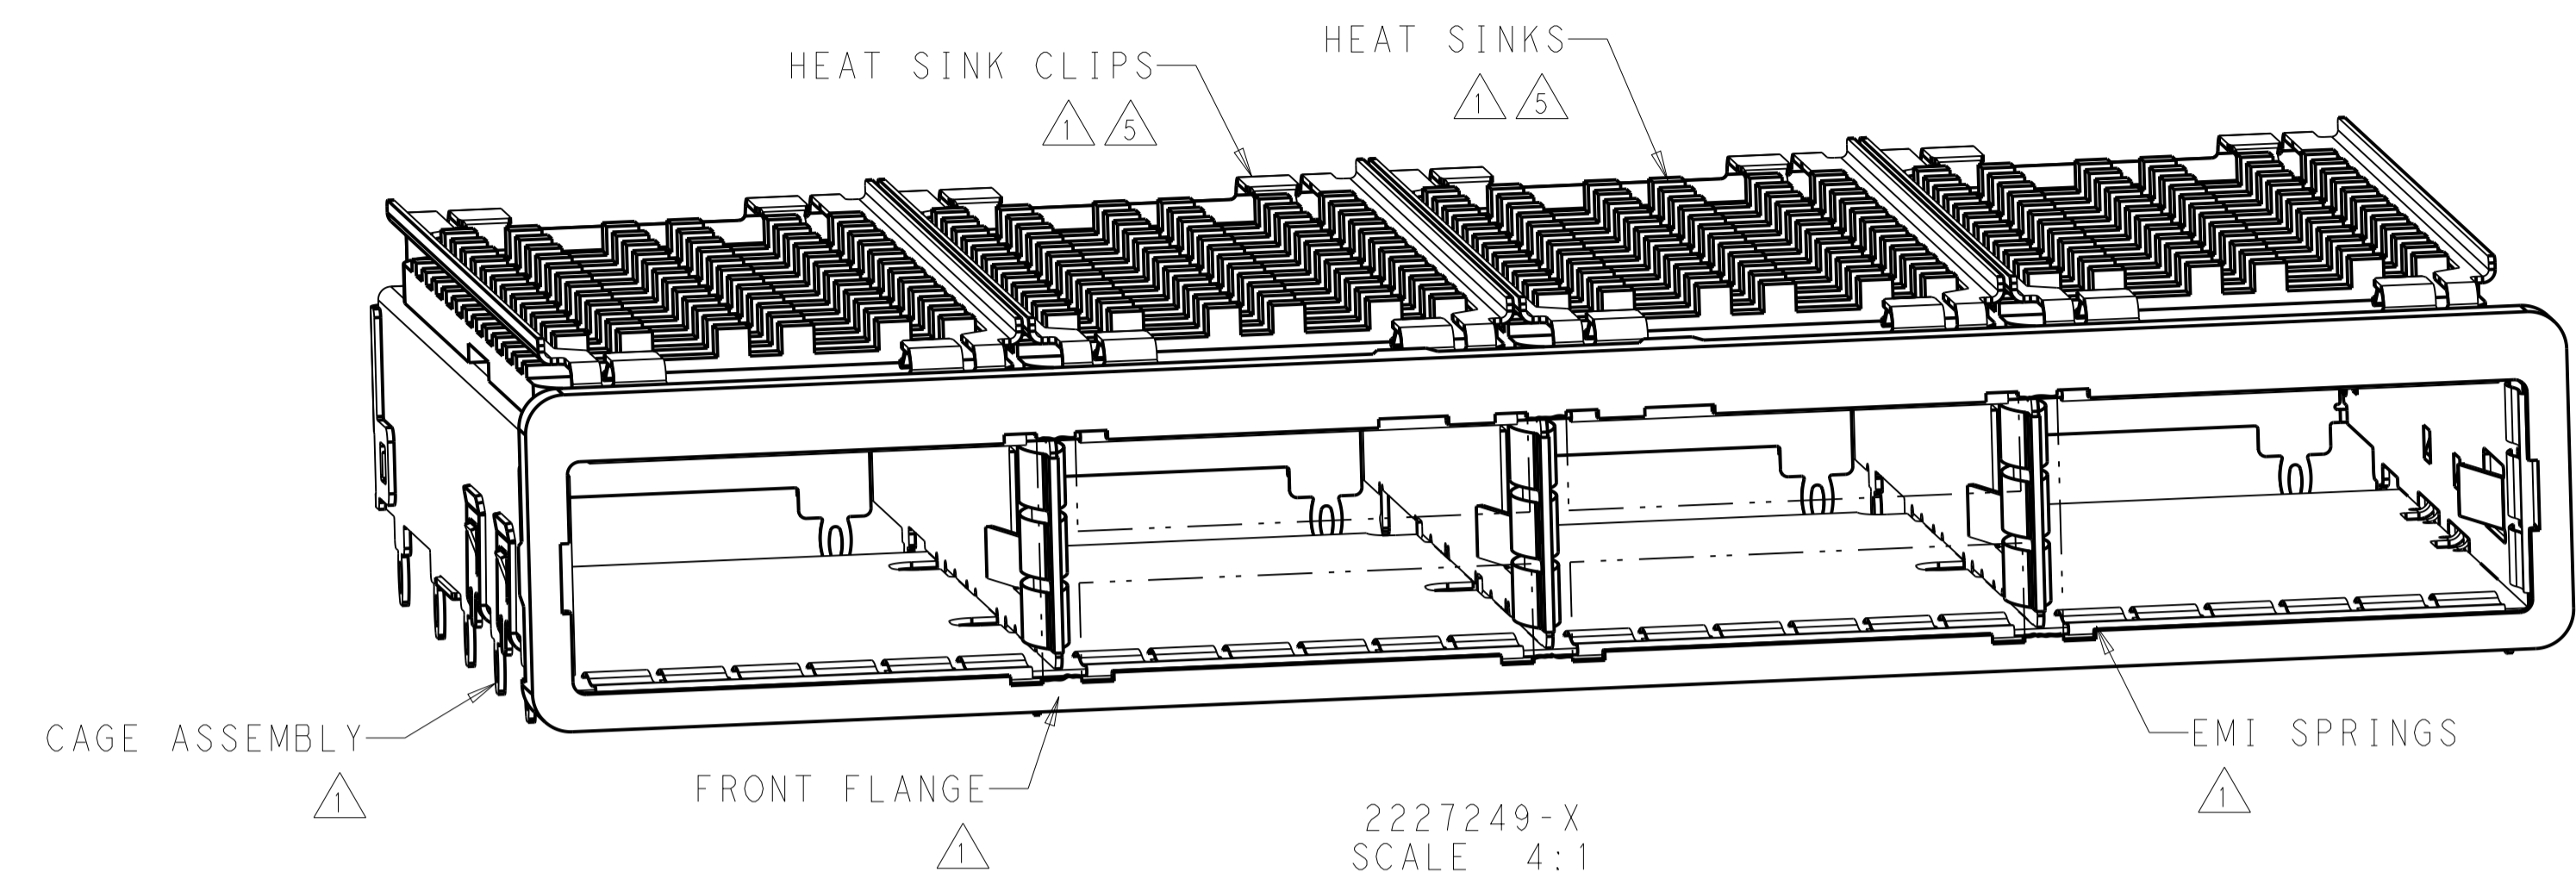


LOC	DIST	REVISIONS					
GP	00	P	LTN	DESCRIPTION	DATE	DWN	APVD
		A		RELEASED ECO-14-003627	11APR2014	LAW	EB

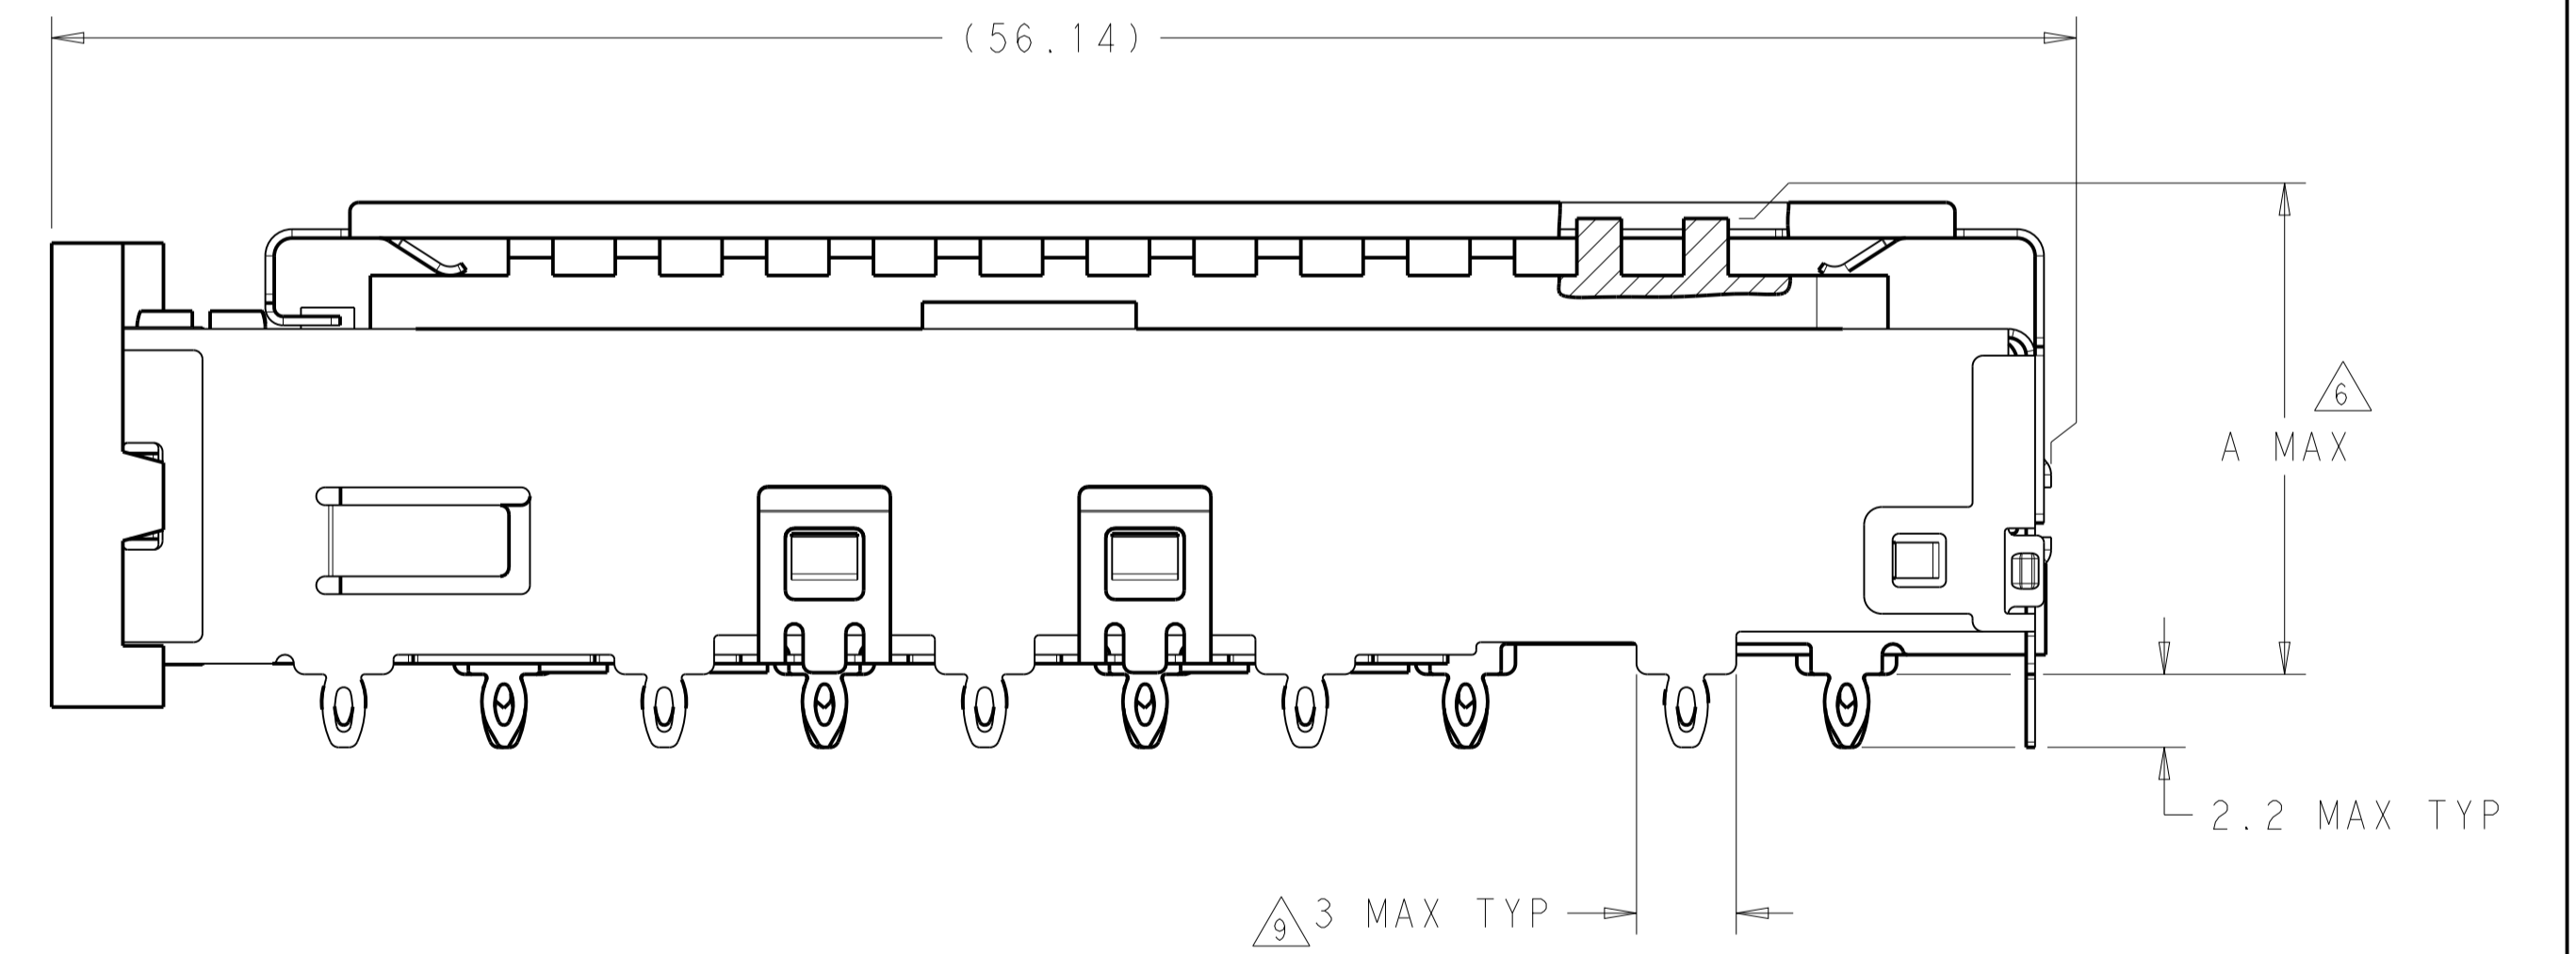

- 1. MATERIALS/FINISH:  
CAGE ASSEMBLY - NICKEL-SILVER ALLOY, (0.25) THICK  
EMI SPRINGS - COPPER ALLOY/2µm MIN TIN  
FRONT FLANGE - ZINC ALLOY/3µm MIN TIN OVER 1.27µm MIN NICKEL OVER 5.08µm MIN COPPER  
HEAT SINK - ALUMINUM/NICKEL  
HEAT SINK CLIP - STAINLESS STEEL
- 2. SPACING BETWEEN CAGES ON THE SAME PCB TO BE SPECIFIED BY THE CUSTOMER, MUST COMPLY WITH MINIMUM DIMENSION SHOWN
- 3. REFERENCE APPLICATION SPECIFICATION 114-32023 FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS
- 4. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5. HEAT SINKS AND CLIPS ARE SHIPPED ASSEMBLED, CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED
- 6. DIMENSION APPLIES WITH MODULE INSERTED IN CAGE
- 7. UNPLATED THRU HOLE
- 8. MATES WITH QSFP MSA COMPATIBLE TRANSCEIVER
- 9. SURFACE TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE CAGE STANDOFFS CONTACT PCB
- 10. BASELINE FOR THESE DIMENSIONS IS THE CENTER OF COMPLIANT PIN HOLE
- 11. DATE CODE (YYWWD) IS MARKED ON TOP OF CAGE BUT IS CONCEALED BY HEAT SINKS, APPLIES TO CAGE ASSEMBLY ONLY
- 12. REFERENCE APPLICATION SPECIFICATION 114-32023 FOR GASKET THICKNESS CALCULATION
- 13. DIMENSION C IS THE NOMINAL THICKNESS OF THE CUSTOMER SUPPLIED PC BOARD:  
SINGLE SIDED PC BOARD MINIMUM THICKNESS - 1.45  
DOUBLE SIDED PC BOARD MINIMUM THICKNESS - 2.4

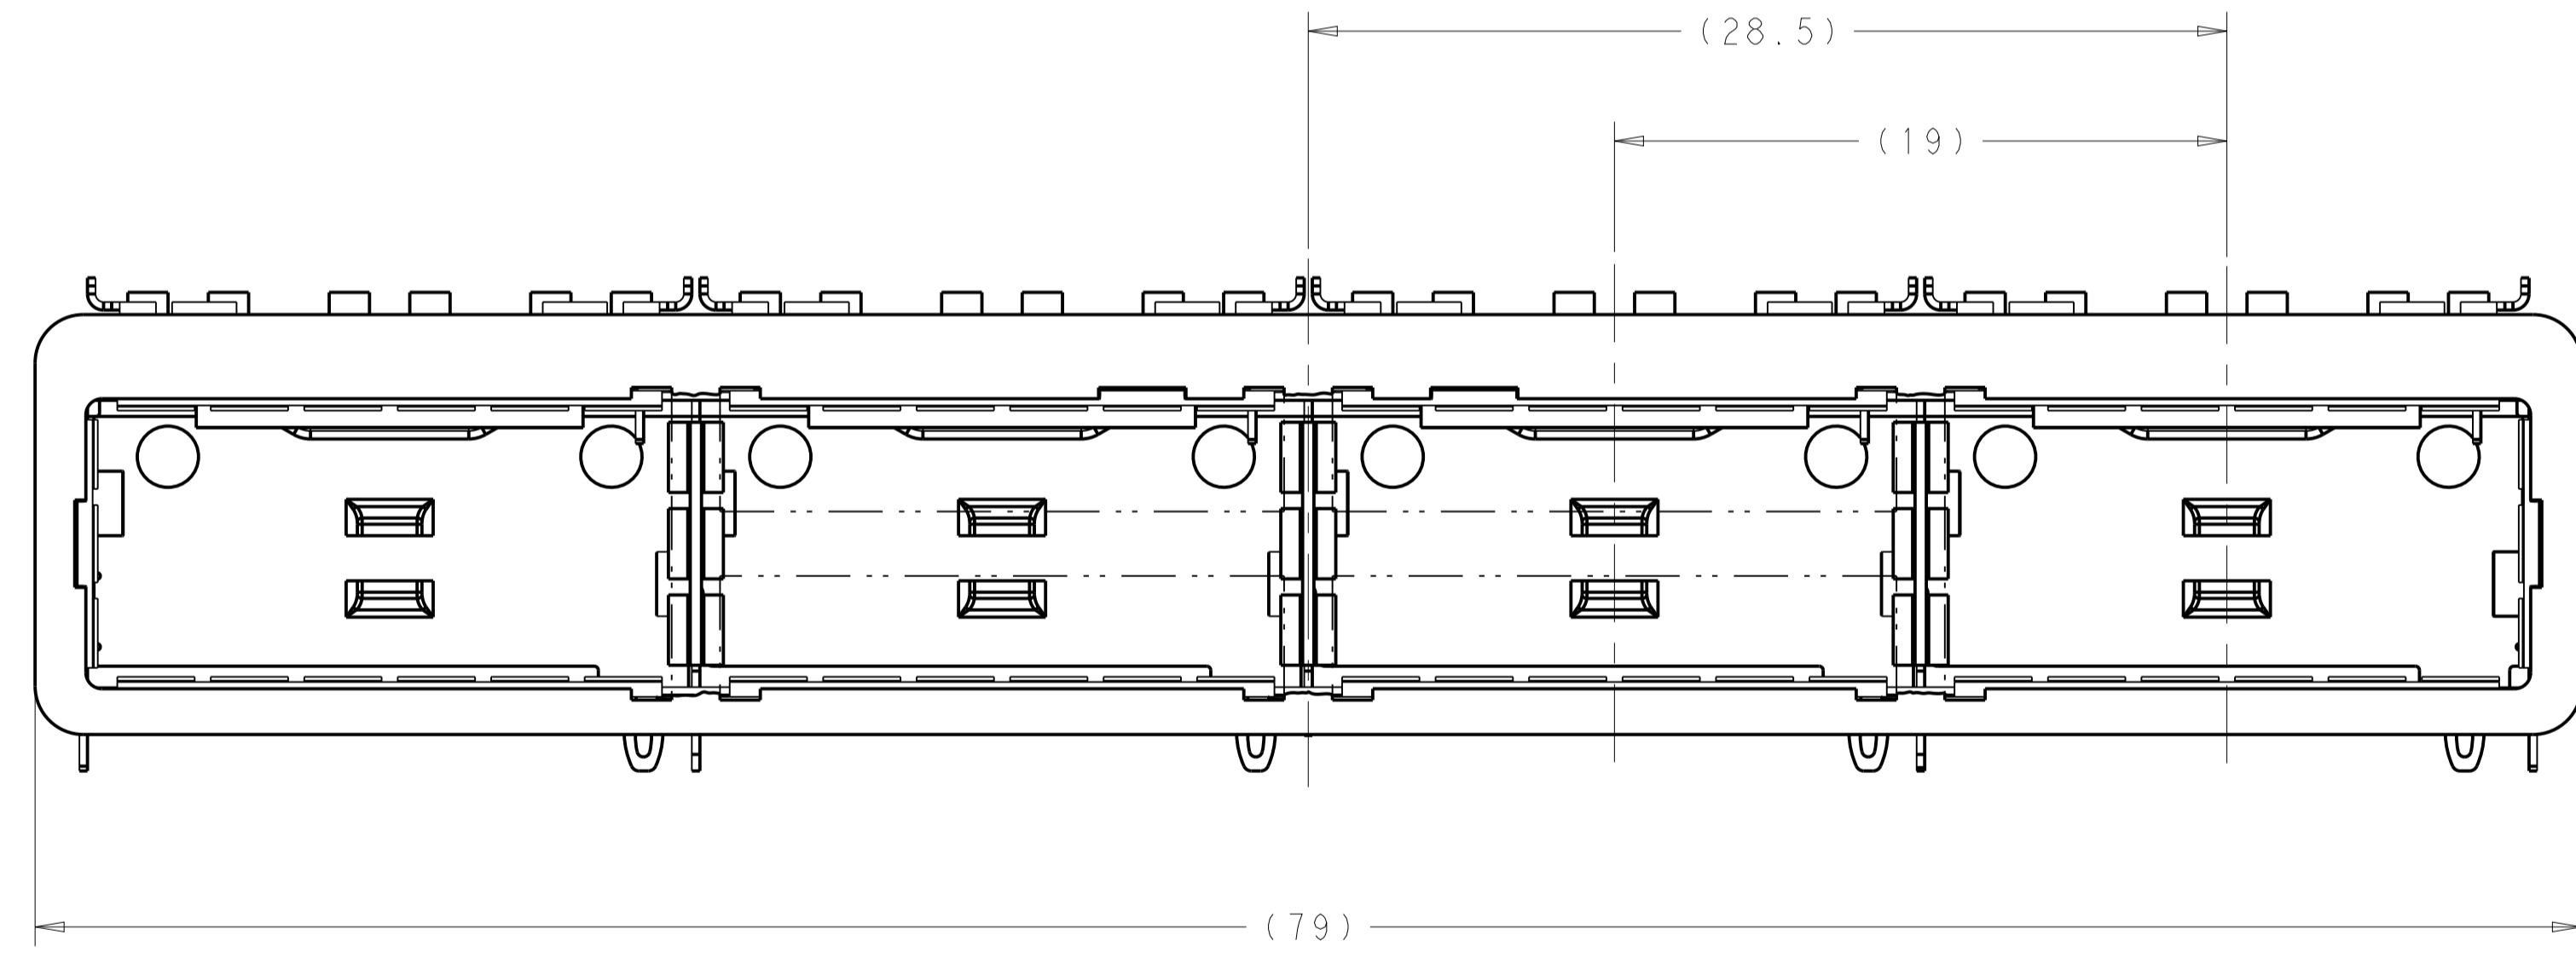






23	NETWORKING	2227249-3
16	SAN	2227249-2
13.7	PCI	2227249-1
A	HEAT SINK PROFILE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		DWN: M.E. CONNER 15AUG2012 CHK: R.R. HENRY 16AUG2012 APVD: R.R. HENRY 16AUG2012	TE Connectivity <b>RECEPTACLE ASSEMBLY WITH HEAT SINKS, BEHIND BEZEL, 1X4, QSFP28</b>
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.15 2 PLC ±0.1 3 PLC ±0.05 4 PLC ±0.025 ANGLES ±0.1	PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: -	
MATERIAL: SEE NOTES	FINISH: SEE NOTES	Customer Drawing	SIZE: A1 CAGE CODE: 100779 DRAWING NO: 2227249 SCALE: 5:1 SHEET 1 OF 4 REV A

LOC	DIST	REV	DATE	BY	APPV
GP	00				


REVISIONS			
NO.	DESCRIPTION	DATE	BY
1	SEE SHEET 1		

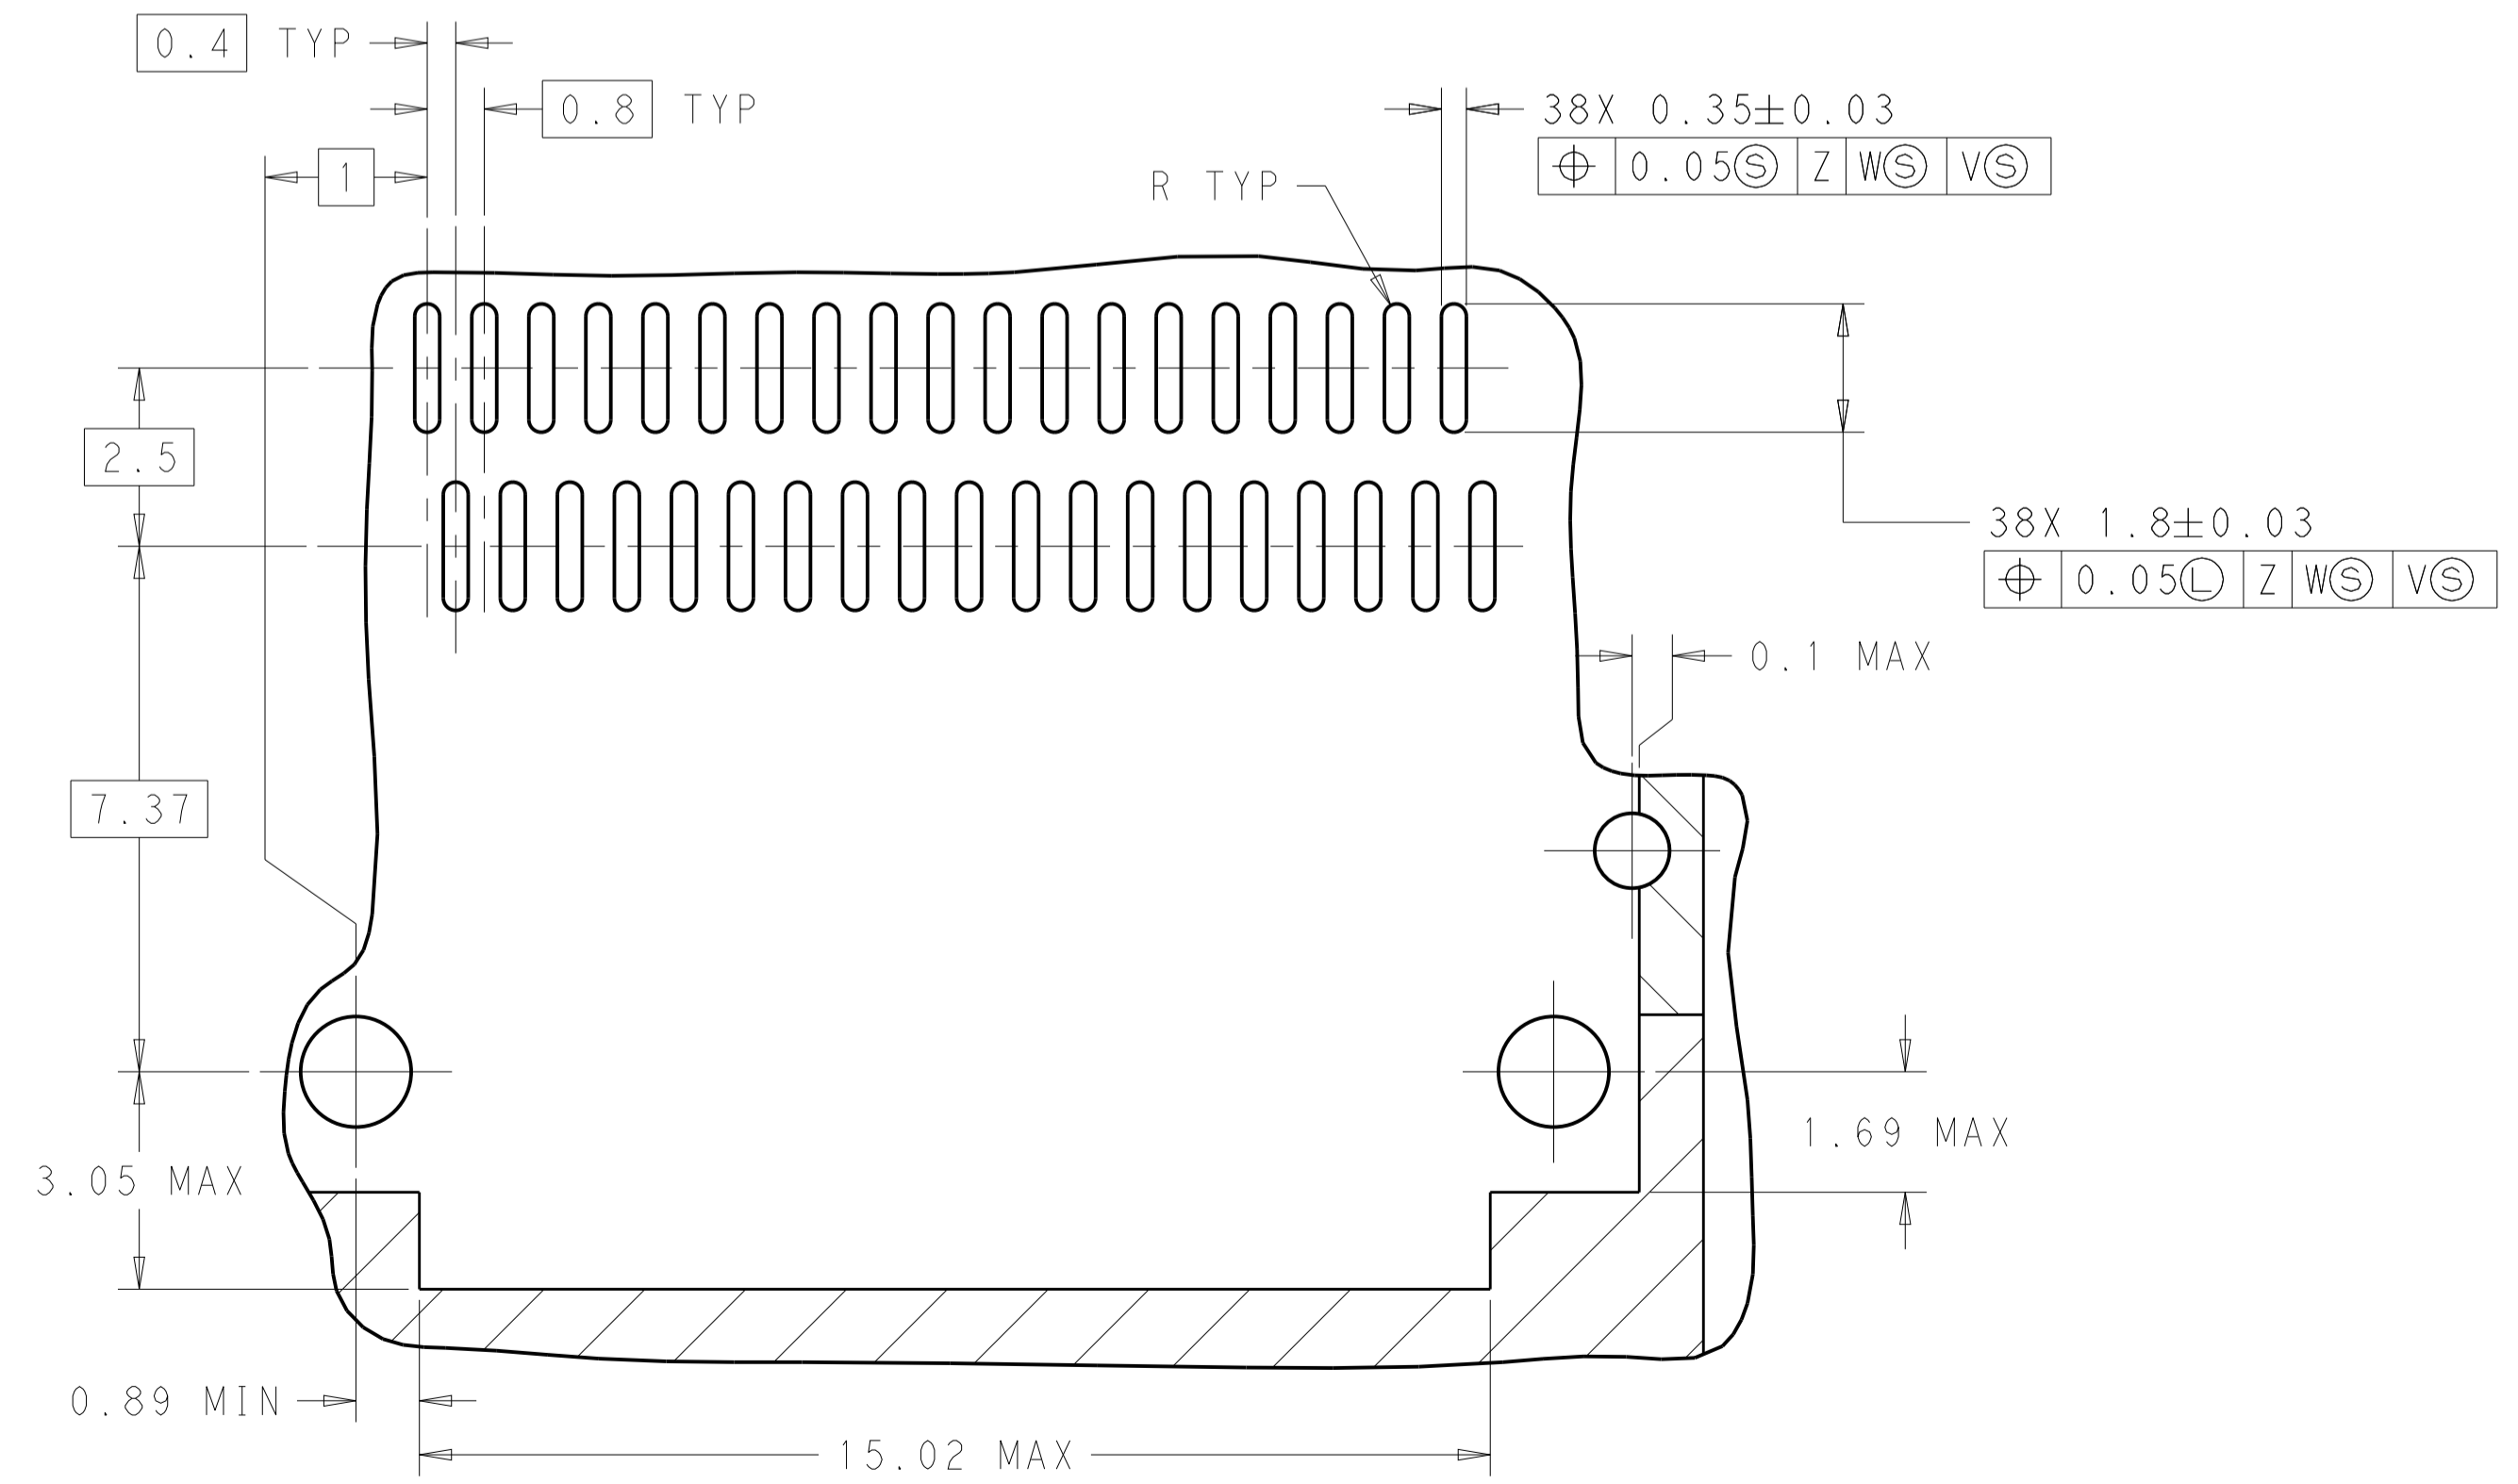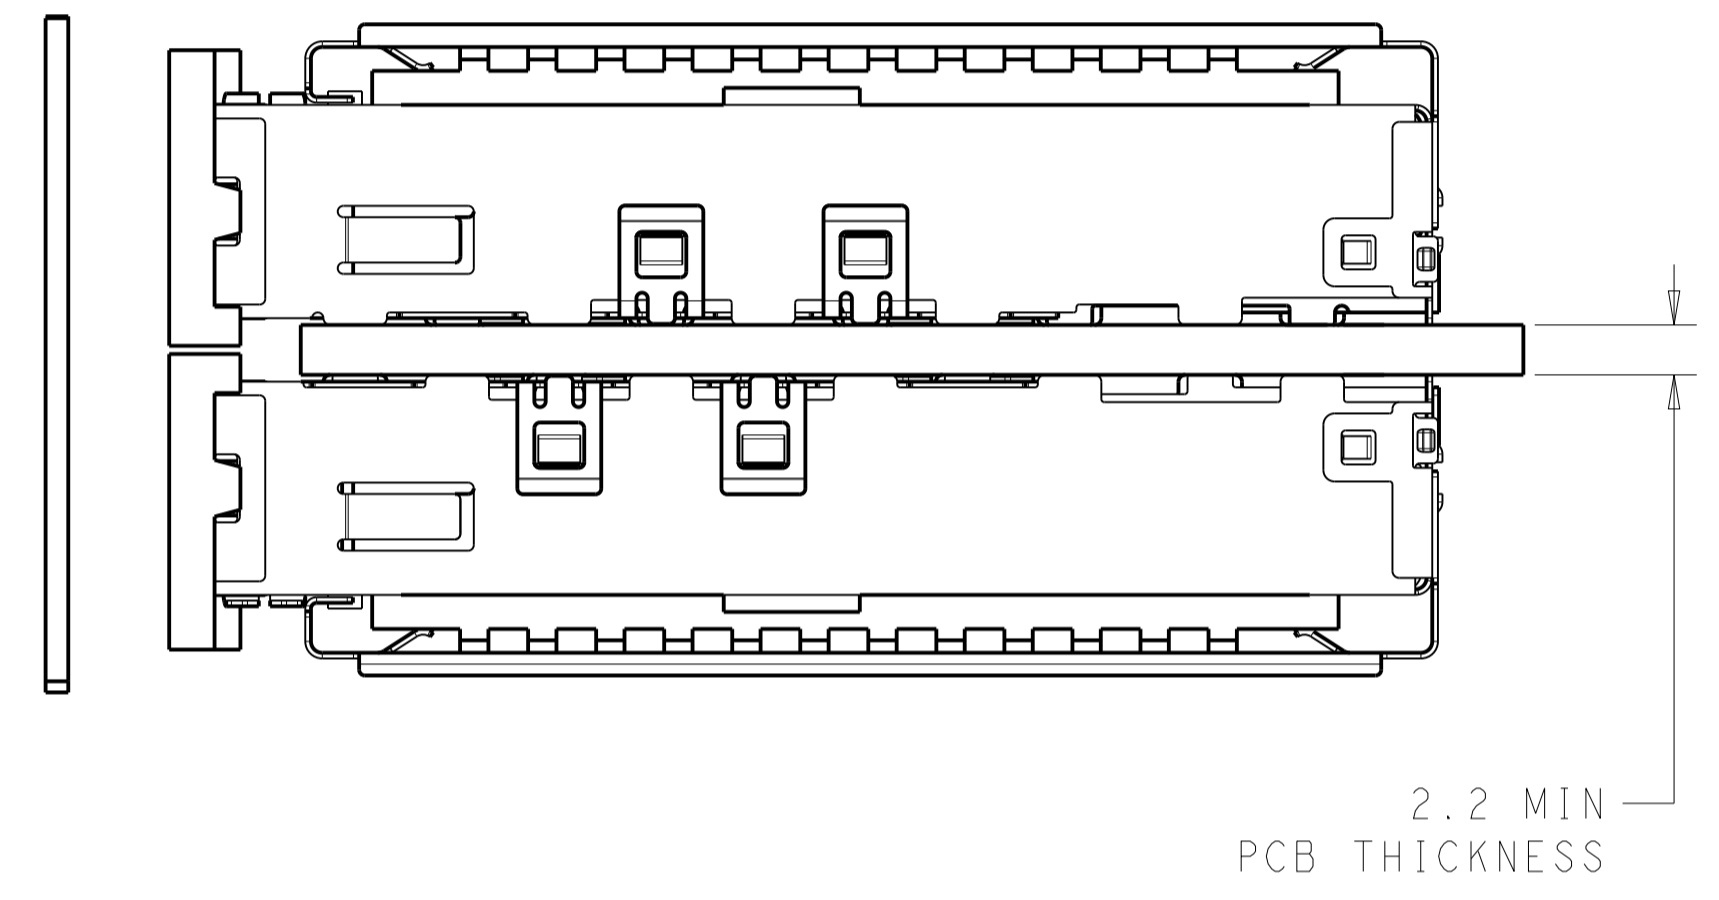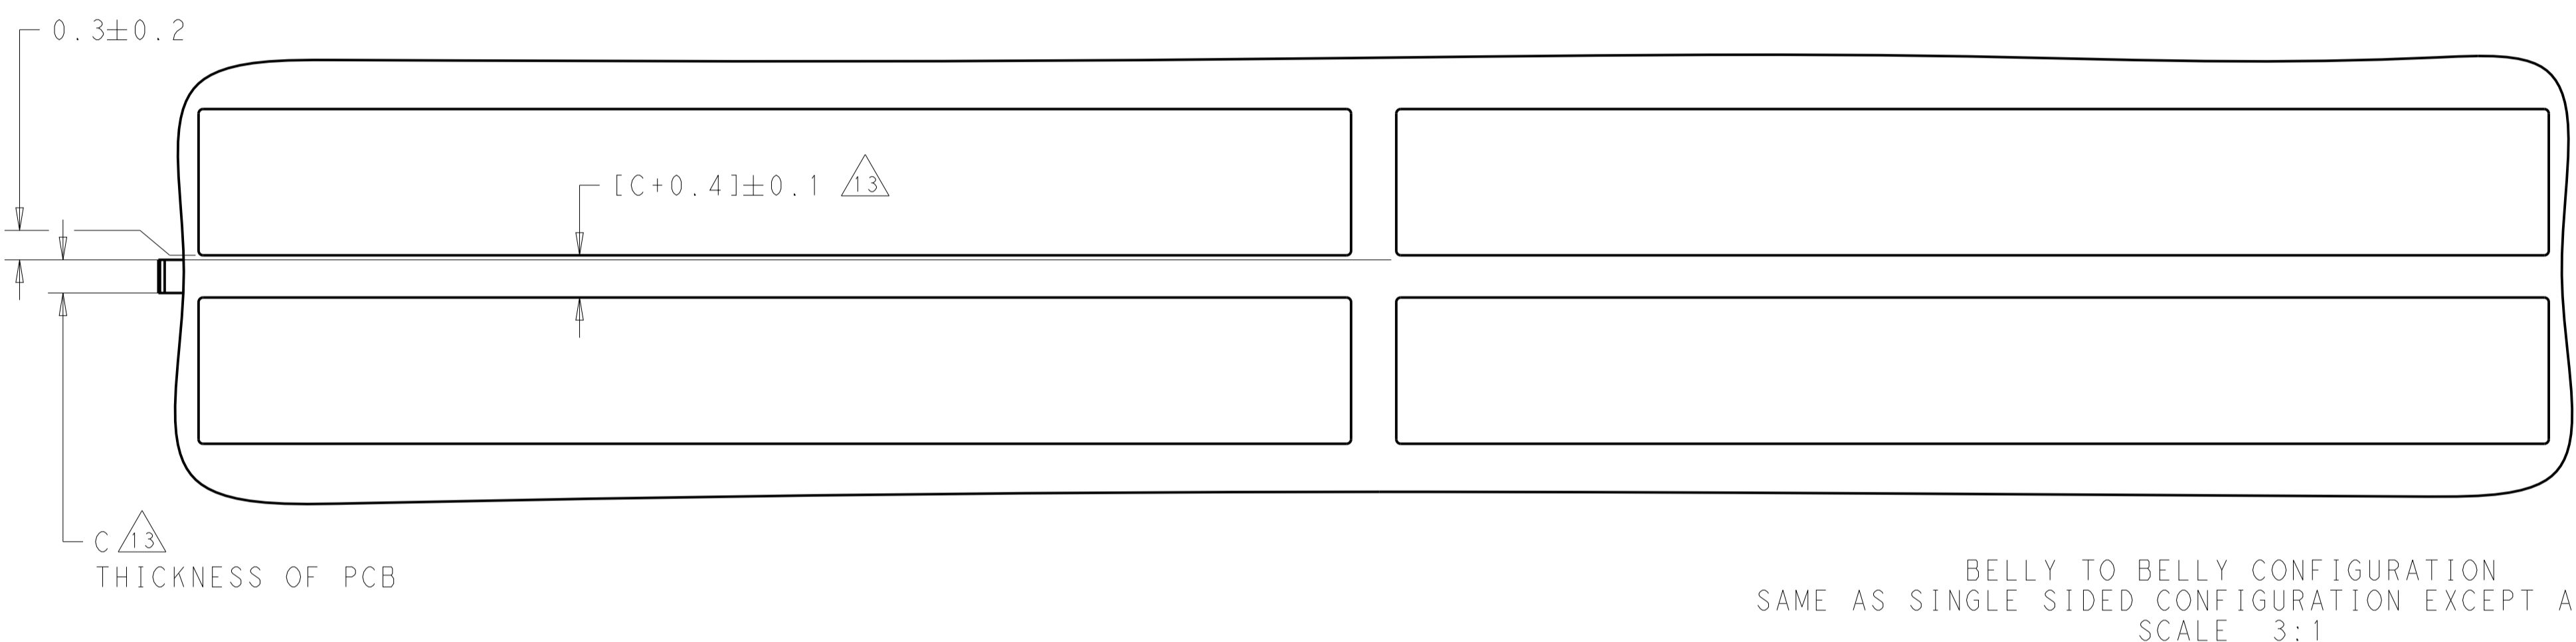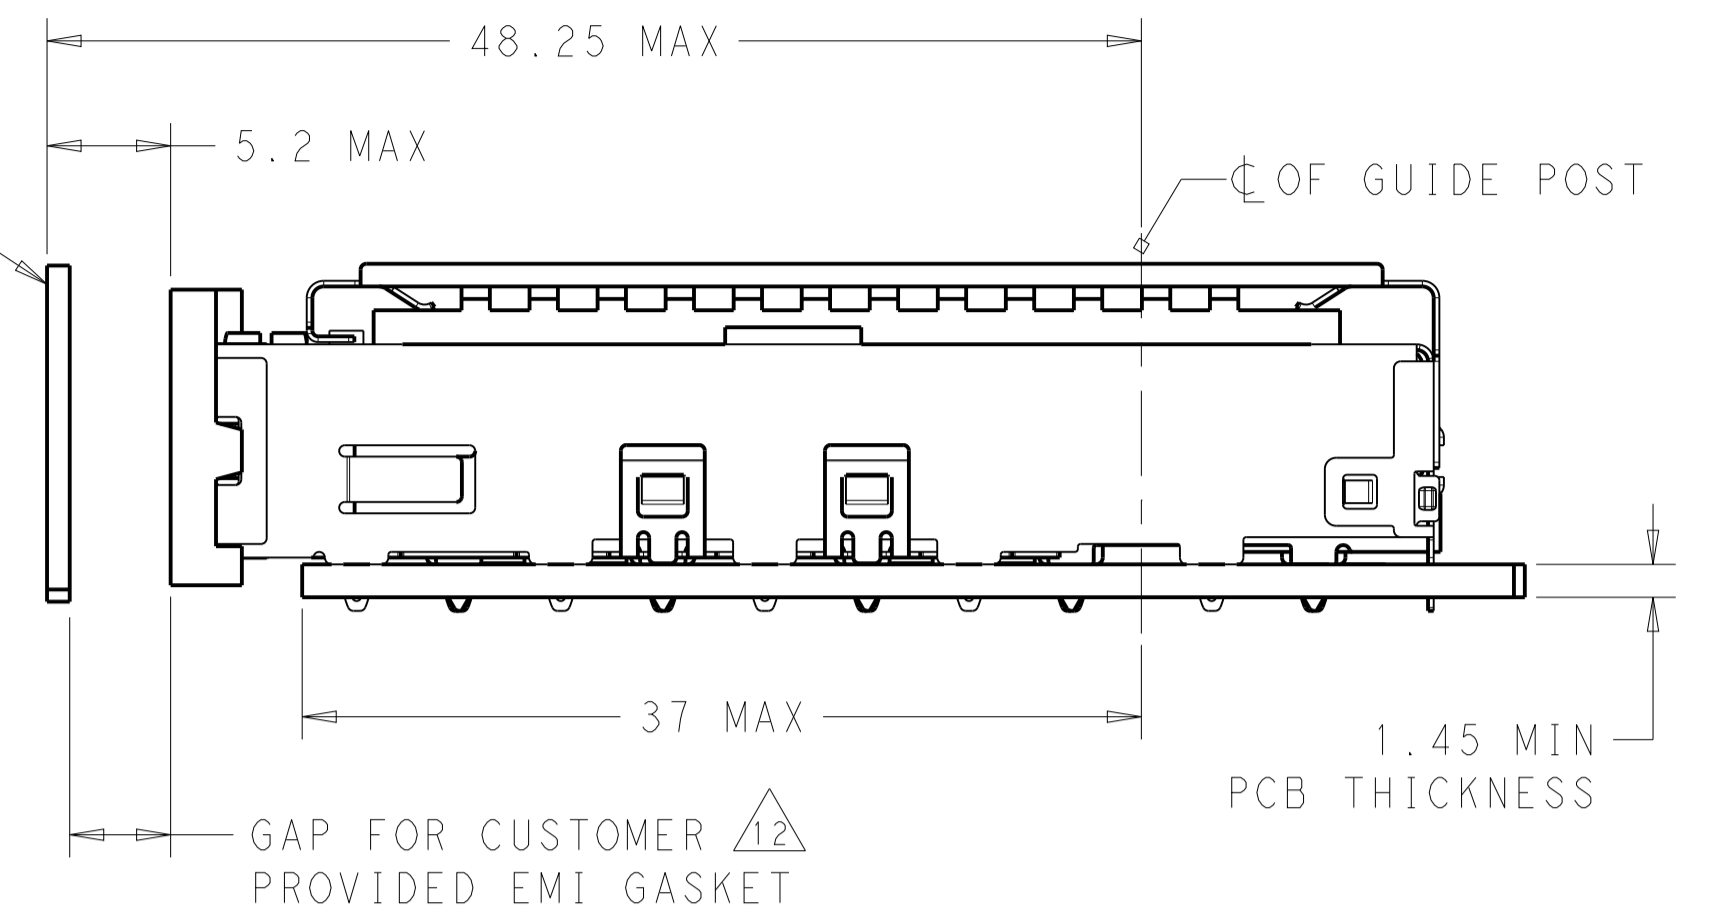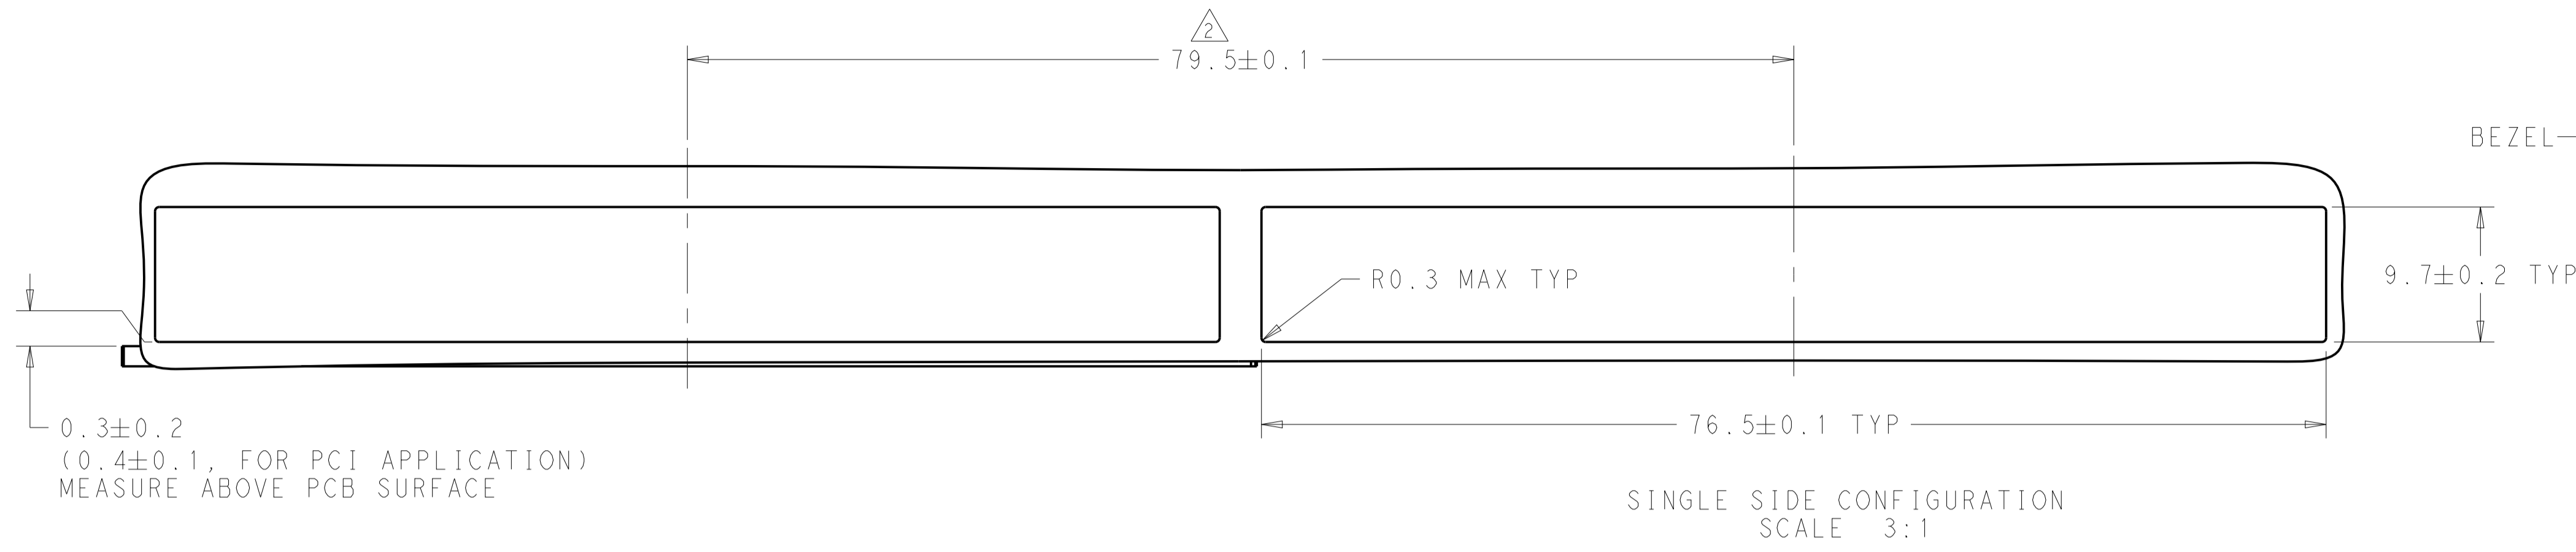

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		OWN: M.E. CONNER 15AUG2012 CHK: R.R. HENRY 16AUG2012 APPV: R.R. HENRY 16AUG2012	NAME: RECEPTACLE ASSEMBLY WITH HEAT SINKS, BEHIND BEZEL, 1X4, QSFP28
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.15 2 PLC ±0.1 3 PLC ±0.05 4 PLC ±0.025 ANGLES ±1	PRODUCT SPEC: - APPLICATION SPEC: - WEIGHT: -	SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2227249
MATERIAL: SEE NOTES	FINISH: SEE NOTES	Customer Drawing	RESTRICTED TO: - SCALE: 4:1 SHEET 2 OF 4 REV A



LOC		DIST		REVISIONS				
P	LTN	DATE	DMN	APVD	DESCRIPTION	DATE	DMN	APVD
-	-	-	-	-	SEE SHEET 1	-	-	-

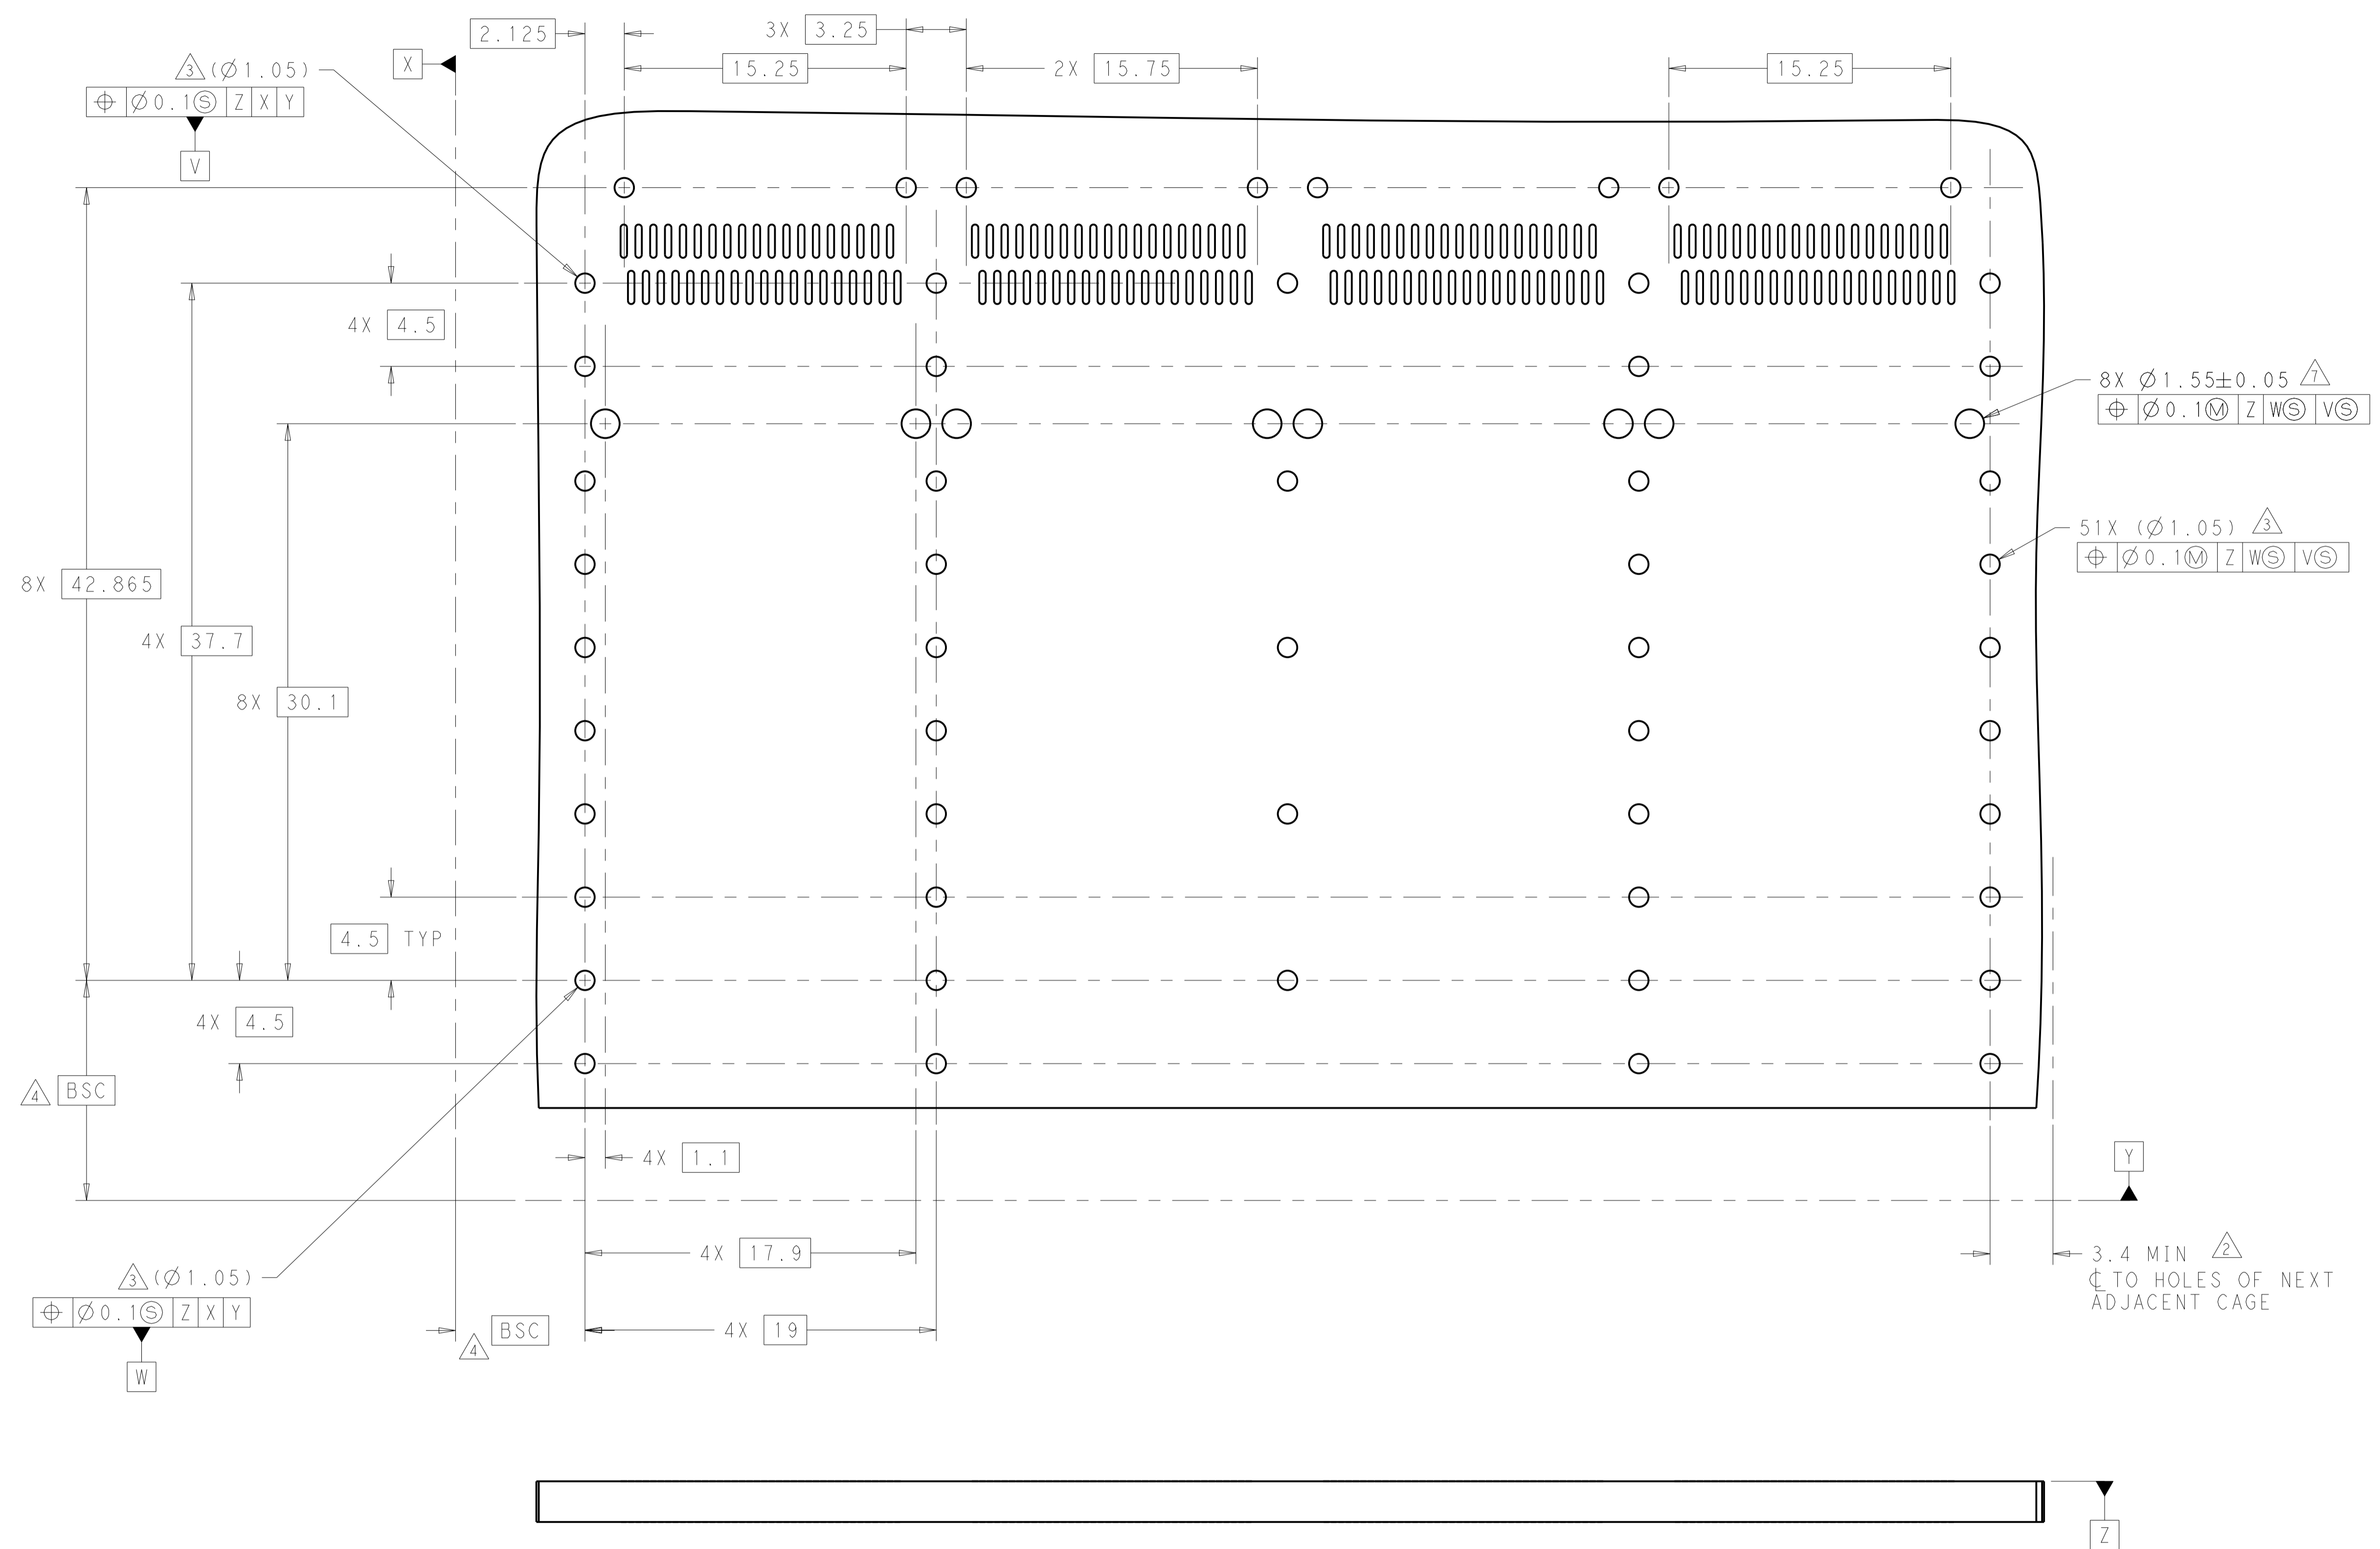

RECOMMENDED PCB LAYOUT  
 BELLY TO BELLY CONFIGURATION  
 SEE SINGLE SIDE MOUNT CONFIGURATION  
 FOR COMPONENT AND TRACE KEEP-OUT  
 SCALE 5:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		DMN: M.E. CONNER 15AUG2012 CHK: R.R. HENRY 16AUG2012 APVD: R.R. HENRY 16AUG2012	TE Connectivity NAME: RECEPTACLE ASSEMBLY WITH HEAT SINKS, BEHIND BEZEL, 1X4, QSFP28 PRODUCT SPEC: - APPLICATION SPEC: -
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.15 2 PLC ±0.1 3 PLC ±0.05 4 PLC ±0.025 ANGLES ±1	SIZE: A1 CAGE CODE: 00779 DRAWING NO: C=2227249	
MATERIAL: SEE NOTES	FINISH: SEE NOTES	WEIGHT: - Customer Drawing	RESTRICTED TO: - SCALE: 4:1 SHEET: 4 OF 4 REV: A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Connectors](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[571763P](#) [58098-0628](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [PCR-E36PM](#) [PCS-XE26MA+](#) [G38A71314B](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [U90B2054081210](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [0709821002](#) [DX40-20P\(55\)](#) [5554841-1](#) [MS3474W18-8P-LC\\*](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [747360449](#) [10099439-003C-TRLF](#) [10137239-0021LF](#) [E9320-001-01](#) [10137239-0011LF](#) [70289-001LF](#) [70.060.1028.0](#) [109029-ZZ](#)