

SPECIFICATION CONTROL DRAWING


55PC2221

TWO CONDUCTOR CABLE, FLAT BRAID SHIELDED, JACKETED,
GENERAL PURPOSE, 600 VOLT

TITLE

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0211 SHIELD - TIN-COATED COPPER JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

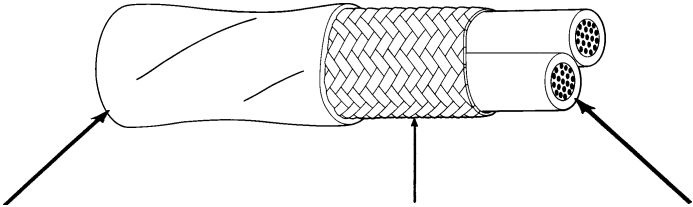

CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD STRAND THICKNESS (.0004)	JACKET THICKNESS (in.)		DIAMETER (in.)		UPPER SPEC VALUE	UPPER SPEC LIMIT	WEIGHT (lbs/1000 ft.)
			LOWER SPEC LIMIT	TARGET	LOWER SPEC LIMIT	TARGET			
55PC2221-24*	24	.0015	.0060	.0075	.101	.105	7.49	8.01	8.01
55PC2221-22*	22	.0015	.0060	.0075	.108	.113	9.84	10.48	10.48
55PC2221-20*	20	.0015	.0060	.0080	.126	.131	13.63	14.30	14.30
55PC2221-18*	18	.0015	.0060	.0080	.144	.150	18.85	19.72	19.72
55PC2221-16*	16	.0015	.0080	.1080	.159	.165	23.08	24.07	24.07
55PC2221-14*	14	.0015	.0065	.0085	.190	.196	33.59	34.76	34.76
55PC2221-12*	12	.0015	.0070	.0090	.228	.235	49.25	50.80	50.80
55PC2221-10*	10	.0015	.0075	.0095	.276	.284	74.61	76.79	76.79

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms) at sea level
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensil Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms)
 Impulse Dielectric Test, 6.0 kV (peak)

1/ The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 1/ Example: AWG 22, red and blue component wires; white jacket: 55PC2221-22-2/6-9

PART NUMBER:
 The "1/" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.
 1/ Example: AWG 22, red and blue component wires; white jacket: 55PC2221-22-2/6-9

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx"). OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

DIMENSIONS ARE IN INCHES AND, UNLESS OTHERWISE DESIGNATED, ARE NOMINAL

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem Wire & Cable
 501 Oakside Avenue
 Redwood City, CA 94063-3800
 Phone: 1-800-227-8816
 Fax: 1-650-361-6297

tyco
 Electronics

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Conductor Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[89182-010-1000](#) [89705-008-500](#) [89842-002-1000](#) [6000FE-877-1000](#) [6120UL-002-1000](#) [CS2885-000](#) [M27500-20SP2S23](#) [6300FE-877-U1000](#) [6309UE-877-1000](#) [M3905-BK005](#) [6502FE 8771000](#) [6541PA-008-U1000](#) [CV6807-000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [720451-000](#) [752687-000](#) [768146-000](#) [773159-000](#) [82841-877-5000](#) [83318E-009-500](#) [8348-060-500](#) [83559-002-1000](#) [83653-002-5000](#) [83659-002-1000](#) [83709-002-1000](#) [8404-060-500](#) [8469 060100](#) [858171-000](#) [8628-060-500](#) [868361-001](#) [8730-060-1000](#) [8737-060-U1000](#) [8747-060-100](#) [8747-060-1000](#) [8769-060-1000](#) [8775-060-500](#) [8780-060-1000](#) [8782-001-U1000](#) [88444-002-1000](#) [9159-060-500](#) [9318-060-1000](#) [939870-000](#) [9423 060U500](#)