

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
1		PROPOSAL DESIGN	31OCT2018	WY	SZ
2		UPDATE SIGNAL PIN HOLE FROM 1.02 TO 0.72	15NOV2018	WY	SZ
A		REVISED	10DEC2019	WY	SZ

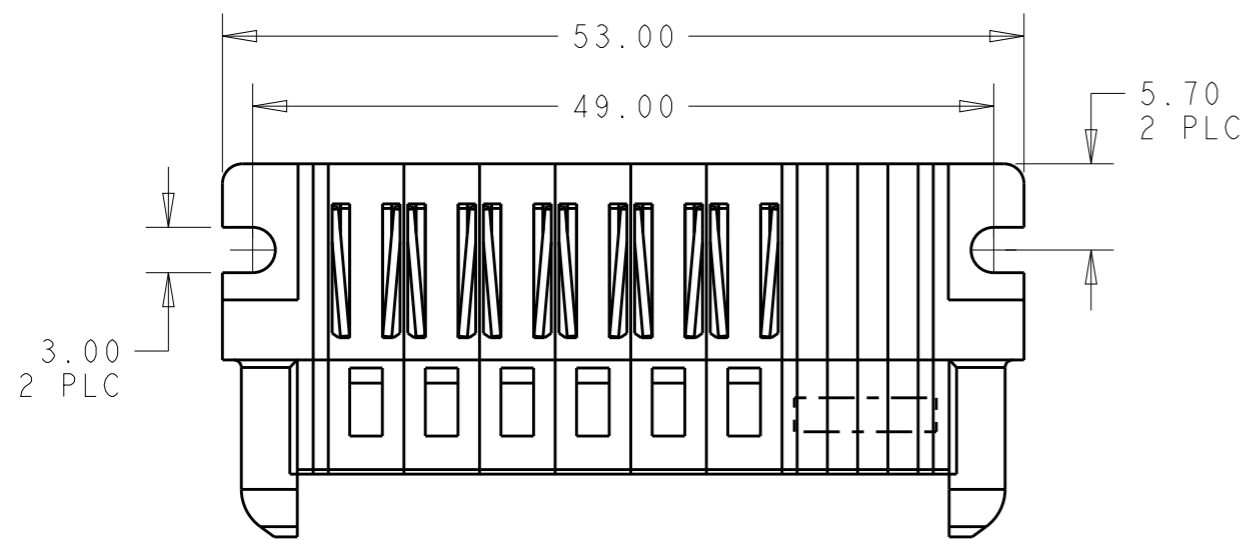

- 1 "TE", PART NUMBER, AND DATECODE TO BE MARKED IN AREA SHOWN. PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES.
- 2 MATERIAL:
HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0
SIGNAL CONTACT - COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 PCB - HOLE DIAMETERS ARE FINISHED HOLE SIZE.
- 7 PCB - .0453±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.003 HOLE.

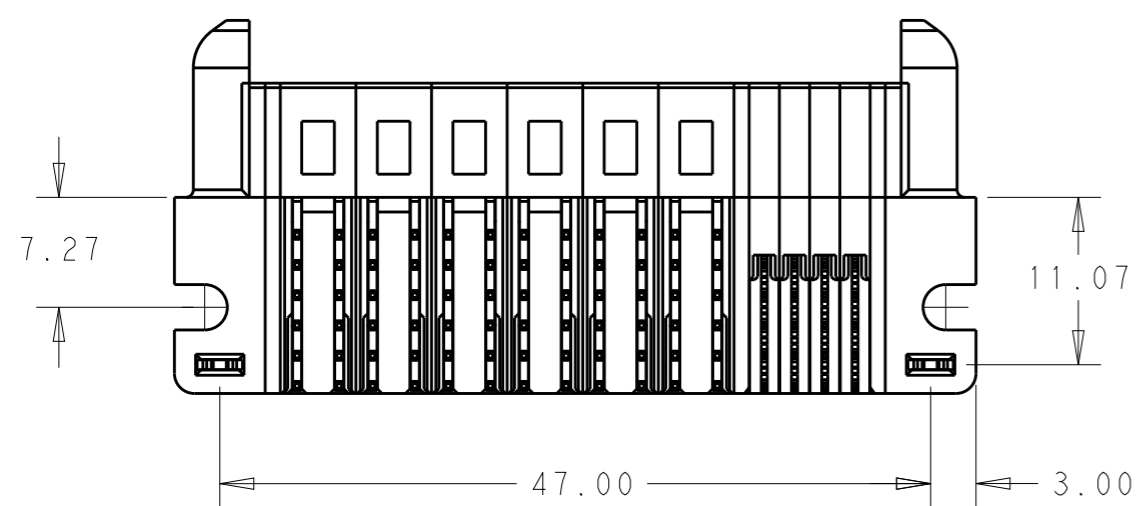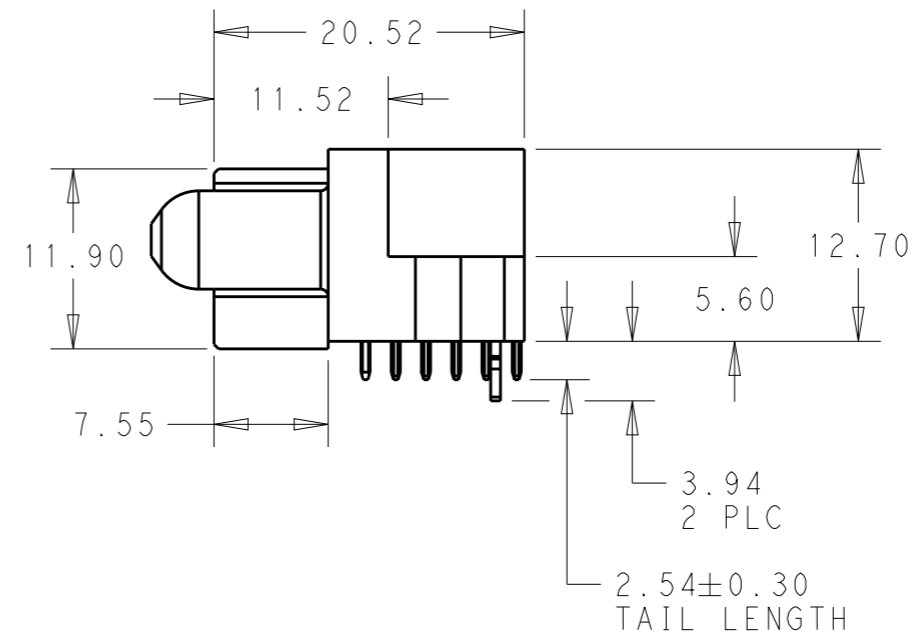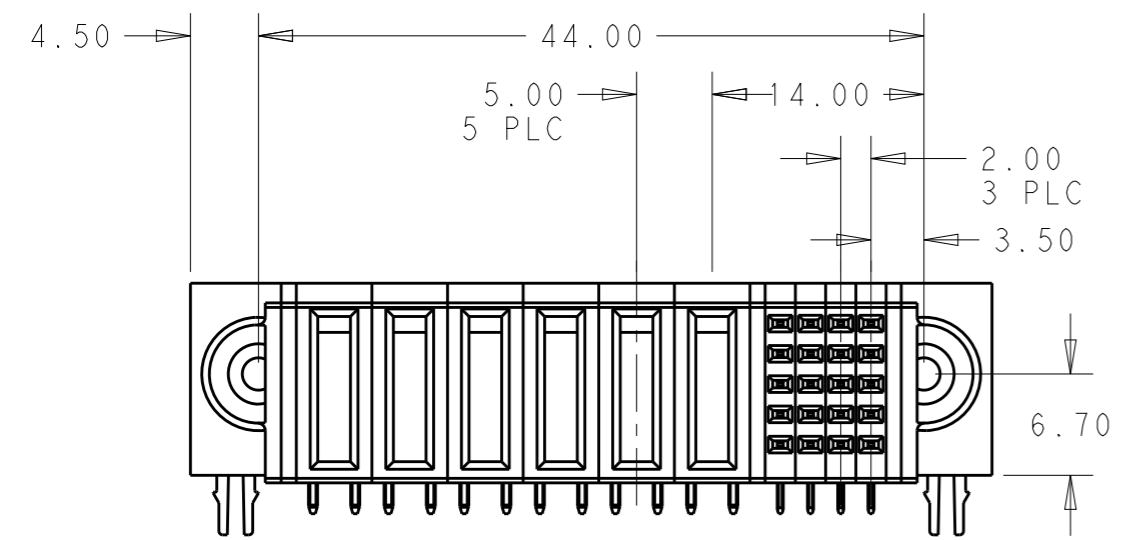

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±0.15
	3 PLC ±0.05
	4 PLC ±-
	ANGLES ±-
MATERIAL	FINISH


DWN	31OCT2018
CHK	31OCT2018
APVD	31OCT2018
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

20S + 6P		2334571-1	
DESCRIPTION		PART NUMBER	
TE Connectivity			
NAME RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2334571-1	-
SCALE 1:1		SHEET 1 OF 2	REV A

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.



REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
		SEE SHEET 1		

PART NUMBER	ROWS	POWER													
		P6	P5	P4	P3	P2	P1	4	3	2	1				
2334571-1	E											V5	V5	V5	V5
	D											V4	V4	V4	V4
	C	RN	RM	RN	RM	RN	RM	RN	RM	RN	RM	V3	V3	V3	V3
	B											V2	V2	V2	V2
	A	HD										V1	V1	V1	V1
20S+6P															

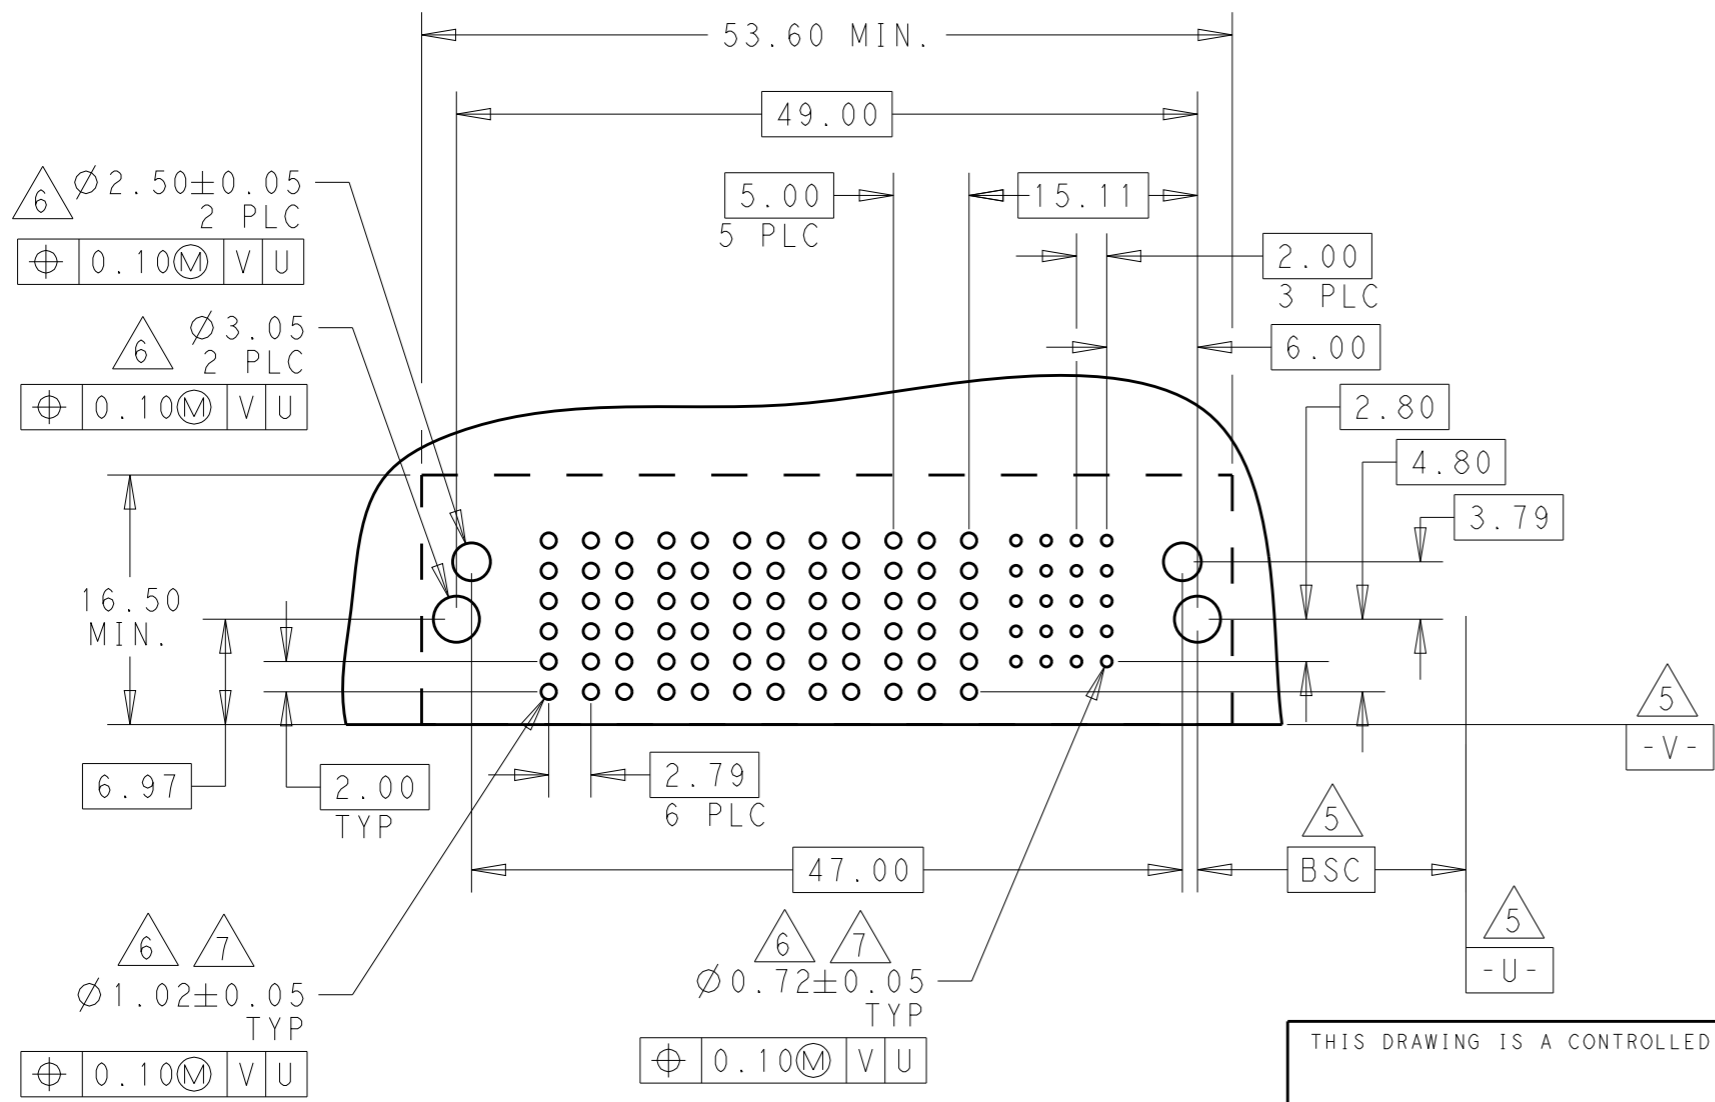

STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW E	V5
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW D	V4
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW C	V3
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW B	V2
STD SOLDER TYPE SIGNAL CONTACT, R/A, ROW A	V1
STD SOLDER POWER CONTACT, RIGHT	RN
STD SOLDER POWER CONTACT, LEFT	RM
HOUSING	HOUSING
HOLD DOWN, MULTI-BEAM	HD
DESCRIPTION	IDENTIFIER

RECOMMENDED PCB LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN WY	31OCT2018	 TE Connectivity
DIMENSIONS: mm		CHK WY	31OCT2018	
		APVD SZ	31OCT2018	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		NAME
0 PLC	±-	-		RIGHT ANGLE RECEPTACLE, SOLDER MULTI-BEAM PLUS
1 PLC	±-	APPLICATION SPEC		SIZE
2 PLC	±0.15	-		A300779
3 PLC	±0.05	WEIGHT		CAGE CODE
4 PLC	±-	-		G=2334571-1
ANGLES	±-	CUSTOMER DRAWING		DRAWING NO
FINISH	±-	SCALE		1:1
		SHEET		2 OF 2
		REV		A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectangular MIL Spec Connectors](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[M32139/03-B06ST](#) [65002-062](#) [77058-22-55PN](#) [86.030.0053.0](#) [GMCT26M0E100JC](#) [1241346-1](#) [MSO34MPK1E1](#) [BACC65CAMA](#) [HSB-D4S03DM222X](#) [890-009-31SA2-BRT1T](#) [27963-20T12](#) [SIM2N40NC3](#) [SIM2S100A](#) [1604996-2](#) [SMD25PN90L-4055](#) [22628-10-6P-791](#)
[GMCT66F0T0000](#) [M32139/03-G05SN](#) [CTD160E01F-6148](#) [CTJ112E03B](#) [CTJ-3D-12](#) [CTJ920E06N-513](#) [CTL-16-090](#) [CY4600-000](#)
[CY4601-000](#) [38111-14-15SN](#) [TMN2N037PC2DM018S](#) [TMN2N051SC2DM018T](#) [MMA23-0111R1](#) [MMD25-0071P1](#) [33516062020](#)
[33526M11-08PC](#) [33526M11-08PE](#) [3355-5869-000](#) [DMC-M99-01AN](#) [Y59113WE20PNV00300](#) [ZPF000000000106310](#) [105979-31](#)
[MTCPK1PJC02S](#) [SIM2N40NC1](#) [SIM2N40NC2](#) [SIM2S110A](#) [SIME2022PNR](#) [787-0015-02](#) [TMN2N009SC2DM018T](#)
[TMN2N025PC2DM018S](#) [ZPF000000000106308](#) [ZPF000000000102759](#) [CTG-20-08-513](#) [5634-201-03158](#)