Molded Parts Specification Control Drawing

234A611 thru 671 Part Number : Description : Boot, Rectangular Subminiature, 90° End Entry, Overexpanded

NOTES 1. All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$; $\frac{\text{ios}}{[\text{gms}]}$ inches lbs

2. Dimensions appearing in table are as follows:


a - As Supplied

b - After Unrestricted Recovery

Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.

Molding ports are optional. When -00 modification number is specified molding ports will be located as shown.

5. Weight shown in table of dimensions is based on polyolefin part.






TABLE OF DIMENSIONS													
PART NUMBER	Н		J		К		Р	R	s	W	Х	Weight	This Boot Fits
	Min	±5%	Min	±5%	Min	Max	±10%	±10%	±10%	±20%	±20%	Nom	Cannon-Cinch
	a	b	a	ь	a	ь	b	ь	ь	ь	ь	ь	
234A611	<u>.63</u> [16,0]	.80 [20,3]	<u>.63</u> [16,0]	<u>42</u> [10,7]	.63 [16,0]	.16 [4,1]	1.02 [25,9]	<u>.85</u> [21,6]	<u>.60</u> [15,2]	.04 [1,02]	.12 [3,05]	.0048 [2,18]	DE-9
234A621	.75 [19,1]	1.11 [28,2]	.75 [19,1]	.42 [10,7]	.75 [19,1]	.21 [5,3]	1.21 [30,7]	.97 [24,6]	.73 [18,5]	.04 [1,02]	.12 [3,05]	.0059 [2,68]	DA-15
234A632	1.15 [29,2]	1.66 [42,2]	1.15 [29,2]	. <u>42</u> [10,7]	1.15 [29,2]	.29 [7,4]	1.69 [42,9]	1.10 [27,9]	.87 [22,1]	.04 [1,02]	.12 [3,05]	.0102 [4,63]	DB-25
234A642	1.35 [34,3]	2.31 [58,7]	1.35 [34,3]	. <u>42</u> [10,7]	1.35 [34,3]	.34 [8,6]	2.10 [53,3]	1.20 [30.5]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0 <u>132</u> [5,99]	DC-37
234A652	1.48 [37,6]	2.28 [57,9]	1.48 [37,6]	<u>.54</u> [13,7]	1.48 [37,6]	<u>.42</u> [10,7]	2.20 [55,9]	1.27 [32,3]	1.00 [25,4]	.04 [1,02]	.12 [3,05]	.0 <u>152</u> [6,90]	DD-50
234A661	.63 [16,0]	.80 [20,3]	.63 [16,0]	.42 [10,7]	.63 [16,0]	.15 [3,8]	1.02 [25,9]	.73 [18,5]	.48 [12,2]	.04 [1,02]	.12 [3,05]	. <u>0045</u> [2,04]	DE-9
234A671	.75 [19,1]	1.11 [28,2]	<u>.75</u> [19,1]	<u>.42</u> [10,7]	.75 [19,1]	.20 [5,1]	1.21 [30,7]	.78 [19,8]	.53 [13,5]	.04 [1,02]	.12 [3,05]	. <u>0056</u> [2,54]	DA-15

TUCO/Electronics/Reychem

Revision: J Date: 10/04/01 Part Number :

234A611 thru 671 Description :

Boot, Rectangular Subminiature, 90° End Entry, Overexpanded


Molded Parts Specification Control Drawing

Part Number: 234A611 thru 671 Description : Boot, Rectangular

Subminiature, 90° End Entry, Overexpanded

COMPATABILITY CHART									
MATERIAL DASH NO.	MATERIAL DESCRIPTION	RT SPEC	COATING SLASH NO.	COATING S NO.	COATING DESCRIPTION				
-3	Polyolefin, Semi-rigid	RT-301	/42; /86	S-1017;S-1048	Adhesive				
-4	Polyolefin, Flexible	RT-1304	/42; /86	S-1017;S-1048	Adhesive				
-8	Polyolefin, Space	RT-1308	N/A						
-25	Elastomer, Fluid Resistant	RT-1325	/86	S-1048	Adhesive				
-100	Polyolefin, Semi−flexible ZEROHAL™	RT-1323	/86	S-1048	Adhesive				

Date :

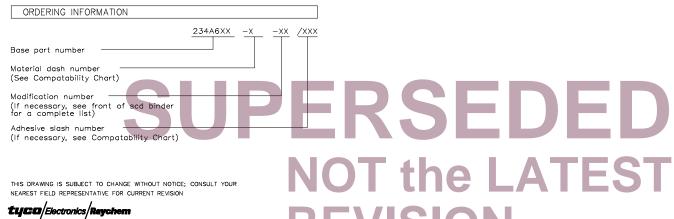

TYCO ELECTRONICS 307 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025

Boot, Rectangular Subminiature, 90° End Entry, Overexpanded

234A611 thru 671

CAD FILE MP01085

Description :

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Cable Boots & End Caps category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

577159N001 645494-000 CX4132-000 687025-000 705331-000 718446-000 725666N001 729257-000 F27131-000 F85868-000 770003S106W2 770-013210W1 770-013311 770-013312 806542N001 807507-000 808059-000 808362-000 808618-000 809125-000 809130000 809218-000 812014-000 812047-000 813166-000 813767N002 814741-000 819117N001 823026-000 823070-000 825002-000
841189N001 861471-000 866647-000 879515-000 937577-000 957073-000 982033-2 A77813-000 R280576000 D96192-000 163549-000
MTPSRBCL-C 1954015-1 200W531-3-0 202A163-4-0-CS5067 202A343-3-00-0 202B221-13-0 202B231-13-0 202B563-25-07-0