

SPECIFICATION SHEET

55A6548

7 October 1986

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED, ONE CONDUCTOR, SHIELDED, JACKETED, LIGHTWEIGHT

Revision B

150°C


ⓑ

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRE - 55A6543

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

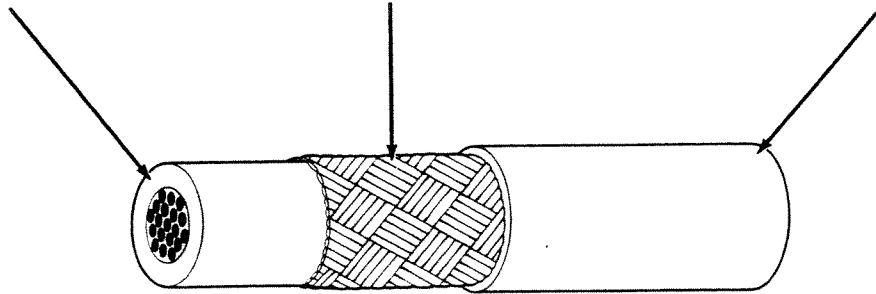

CABLE CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft.)
			MINIMUM	NOMINAL 1/	NOMINAL 1/	MAXIMUM	
55A6548-26-*	26	38	.006	.008	.065	.070	4.7
55A6548-24-*	24	38	.006	.008	.070	.075	5.7
55A6548-22-*	22	38	.006	.008	.076	.081	7.1
55A6548-20-*	20	38	.006	.008	.084	.089	9.2
55A6548-18-*	18	38	.006	.008	.094	.099	12.3
55A6548-16-*	16	38	.006	.008	.102	.108	14.8
55A6548-14-*	14	38	.006	.008	.119	.125	21.0
55A6548-12-*	12	38	.006	.008	.137	.143	29.1

1/ Nominal values are for information only. Nominal values are not requirements.

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts, 60 Hz

FLAMMABILITY:

Procedure 1, 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 100% (minimum)

Tensile Strength, 5000 lbf/in² (minimum)

JACKET FLAWS:

Spark Test, 1000 volts, 60 Hz (rms), 100% test

Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

THERMAL SHOCK: 300 ± 3°C for 6 hours

VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend, and Thermal Shock) 1000 volts, 60 Hz, 1 minute

PART NUMBER:

The "*" in the part numbers above shall be replaced by color code designators in accordance with MIL-STD-681 with a dash separating the component wire color from the jacket color.

Example:

AWG 20, white component wire; white jacket: 55A6548-20-9-9.

ⓑ

ⓑ

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
4151 361 3333 TWX 910 373 1205

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hook-up Wire](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[002333-000](#) [M81044/12-22-6](#) [M81044/9-8-9](#) [743094-001](#) [81044/12-18-9CS3209](#) [8538-009-1000](#) [ATFC0311-20-5D](#) [EF5675-000](#)
[BFWUL3239-24-PINK](#) [22759/34-16-9CS2621](#) [22759/42-24-9CS2620](#) [933205-000](#) [284711-000](#) [961473-000](#) [30802-009-250](#) [99M0111-20-2](#)
[A00594-000](#) [190571-000](#) [22759/41-12-9CS2620](#) [22759/41-16-9CS2620](#) [22759/43-10-9CS2873](#) [265925-000](#) [CM9524-000](#) [31510-010-250](#)
[31514-009-500](#) [32412-009-500](#) [34401-010-250](#) [34402-010-500](#) [M81044/9-4-9](#) [391441-BK007](#) [400R0111-10-9](#) [431660-000](#) [ATFC0311-20-0](#)
[ATFC0311-20-3](#) [44/7024-26-9-9](#) [44A0112-22-9CS3184](#) [456157-000](#) [BFW-UL3239-24-WHITE](#) [55/0312-26-6L-CS2570](#) [55A0811-12-9](#)
[55A6087-20-9-9-9](#) [55A6315-22-9-9CS2632](#) [55A7400-22-9/96-9CS2275](#) [55A9002-30-5](#) [55PC0211-20-5CS2502](#) [55PC0811-6-9CS2637](#)
[55PC1211-22-9-9CS3278](#) [C07683-000](#) [32820-009-5000](#) [34020-008-2000](#)