

SPECIFICATION CONTROL DRAWING

55PC0716

TITLE WIRE, RADIATION-CROSSLINKED, MODIFIED, ETFE-INSULATED,
NICKEL-COATED HIGH STRENGTH COPPER ALLOY, HEAVY DUTY, 1000 VOLT


Date 4-16-93

Revision B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

CONDUCTOR - NICKEL-COATED HIGH STRENGTH
COPPER ALLOY

INSULATION - RADIATION-CROSSLINKED,
MODIFIED ETFE

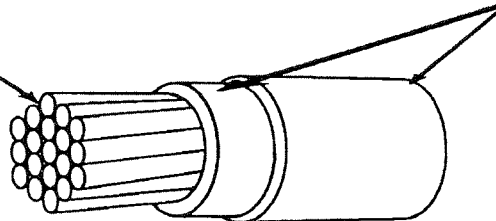

CONSTRUCTION DETAILS

PART NUMBER	WIRE SIZE (AWG)	CONDUCTOR STRANDING (number x AWG)	CONDUCTOR DIAMETER (in.)			MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.)	FINISHED WIRE DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0716-26-*	26	19 x 38	.0175	.0183	.0191	49.4	.0482	.0505	.0528	2.18	2.28
55PC0716-24-*	24	19 x 36	.0225	.0233	.0241	30.1	.0532	.0555	.0578	2.87	3.08
55PC0716-22-*	22	19 x 34	.0285	.0293	.0301	18.6	.0592	.0615	.0638	3.89	4.13
55PC0716-20-*	20	19 x 32	.0365	.0375	.0385	11.4	.0671	.0695	.0719	5.49	5.78
55PC0716-18-*	18	19 x 30	.0452	.0464	.0476	7.1	.0769	.0795	.0821	7.93	8.34
55PC0716-16-*	16	19 x 29	.0514	.0527	.0538	5.5	.0844	.0870	.0896	9.84	10.28

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
Maximum continuous conductor temperature
VOLTAGE RATING: 1000 volts (rms)
COLOR: White preferred
CROSSLINKING PROOF TEST: 300 ± 3°C for 1 hour
IDENTIFICATION AND COLOR STRIPING DURABILITY:
125 cycles (250 strokes) (minimum), 500 g weight
INSULATION ELONGATION AND TENSILE STRENGTH:
Total Insulation,
Elongation, 50% (minimum)
Tensile Strength, 5000 lbf/in² (minimum)

INSULATION FLAWS:
Spark Test, 3.0 kV (rms), 60 Hz
Impulse Dielectric Test, 8.0 kV (peak)
INSULATION THICKNESS: .015 in. (nominal) total insulation
SHRINKAGE: 230 ± 3°C for 1 hour, 0.125 in. (maximum) in 12 in.
VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
2500 volts (rms)

PART NUMBER:
The *** in the part numbers above shall be replaced by color code designators.
Example: AWG 22, white: 55PC0716-22-9
AWG 22, white with black stripe: 55PC0716-22-90

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-881.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF SUBSTITUTION FOR BID.

Raychem

Raychem Corporation
300 Constitution Drive, Menlo Park, California 94025
(415) 361 3333 TWX 910 373 1728

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[D38999/24FJ4AN](#) [570416-000](#) [CLTEQ-M81CE-SSRELAY-4-20V](#) [4-1195131-0](#) [650069-000](#) [SMD100-2](#) [358838-000](#) [CB-1022B-78](#)
[RM707012](#) [RP410012](#) [MMS42](#) [1-640426-8](#) [2EDL4CM](#) [DTS20W19-11PD-3028-LC](#) [RM202615](#) [NC6-P104-06](#) [MSPS103B](#) [DTS26F21-](#)
[41HE-LC](#) [DTS26F21-41AE](#) [DTS26F21-41PE-LC](#) [DTS26F21-11SE-3028-LC](#) [30DCB6](#) [1932144-1](#) [293545-4](#) [LVR125S](#) [MS27466T25F4PB](#)
[CKB-38-78010](#) [TR04AI-TINELLOCKRING](#) [1206SFF150F/63-2](#) [D38999/20JB35HA](#) [TE1500A2R2J](#) [D38999/20WC8BB](#) [DTS24F19-11SC-](#)
[3028-LC](#) [D38999/24WG11HA](#) [D38999/24WG11HN](#) [MS27467T21F11H](#) [DJT16E21-11HA](#) [MS27467T21F35J](#) [MS27467T21F11J](#)
[MS27467T21F16H-LC](#) [MS27467T21F35H](#) [MS27467T21F41H-LC](#) [1206SFH150F/24-2](#) [RP330024](#) [DJT16E21-11PA-LC](#) [DJT16E21-11HA-](#)
[LC](#) [DJT16E21-11AA](#) [MS27467T21B11JA](#) [DJT16E21-11JA](#) [MS27467T21B11JA-LC](#)