


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
J2		REVISED PER ECO-11-005140	30MAR11	RK	HMR		

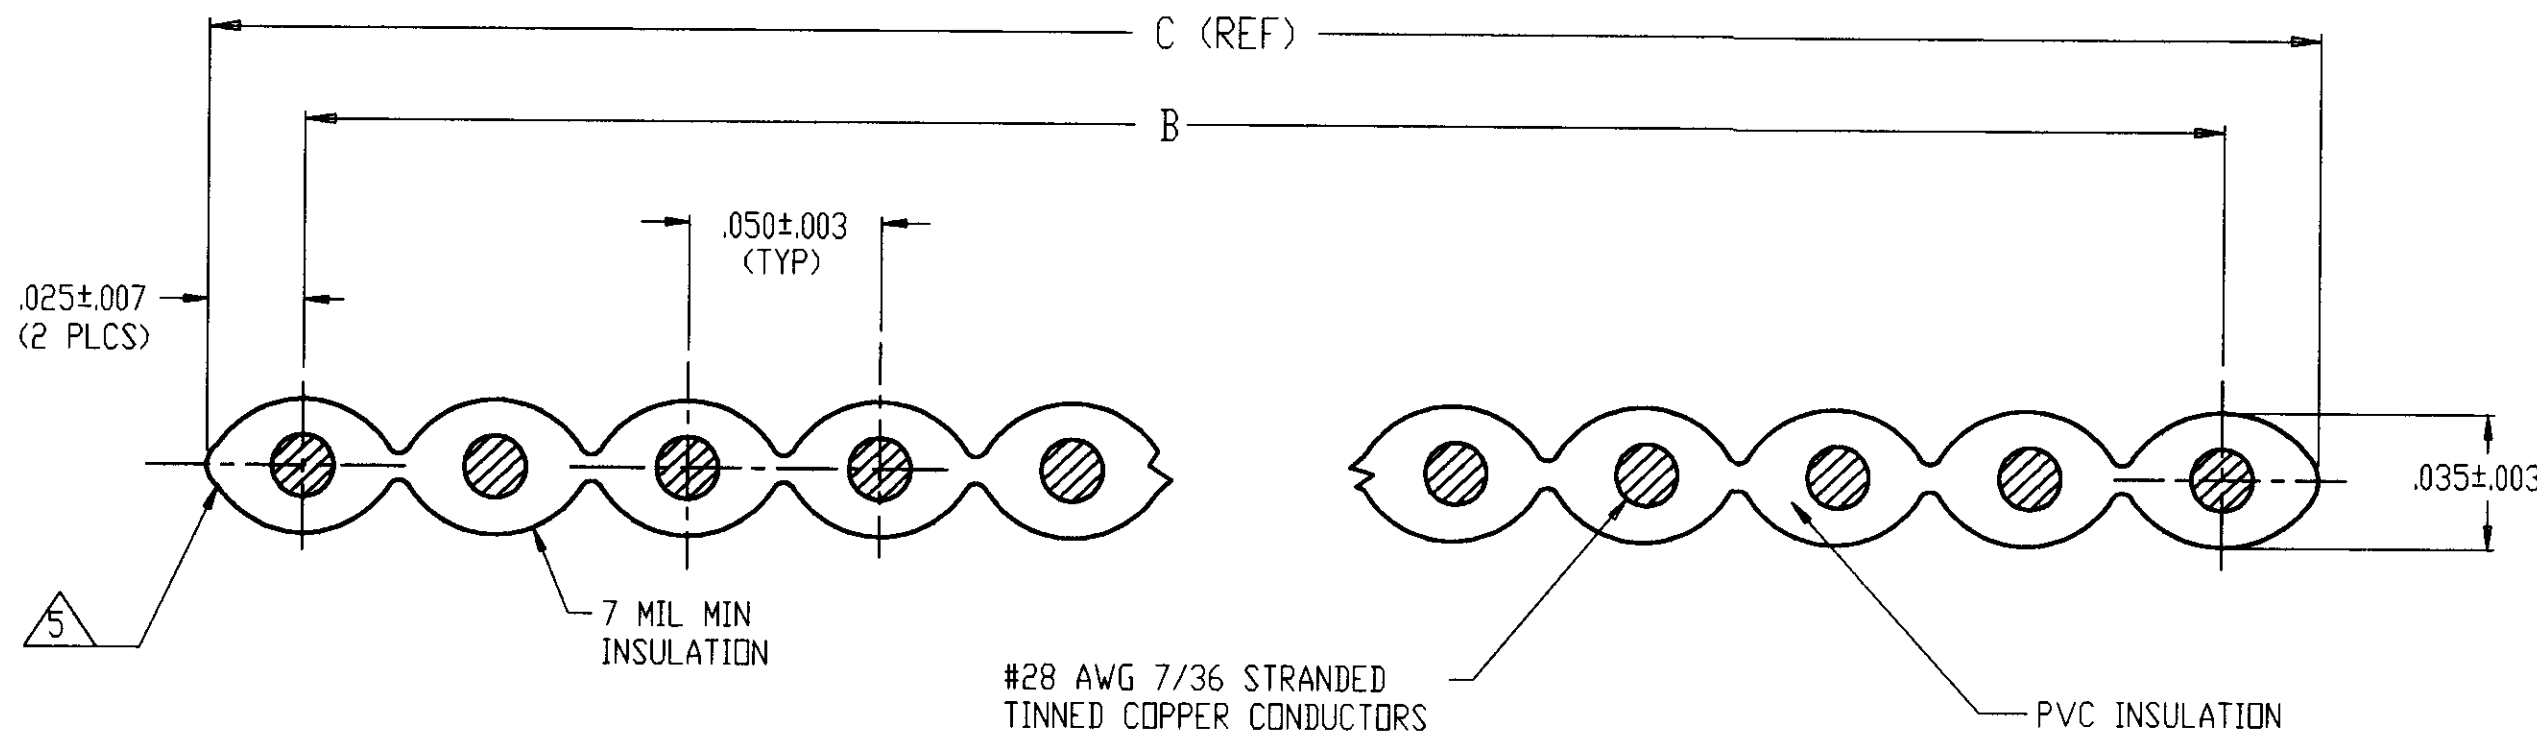

FLAT CABLE CROSS-SECTION

- CABLE CERTIFIED TO:
 - UL CABLE STYLE: 2651
 - CSA: CSA AWM IA 105°C 300 V FT1
- CABLE PHYSICAL SPECIFICATIONS:
 - 2.1 TEMPERATURE RATING: 105°C
 - 2.2 FLAMMABILITY:
 - UL: VW1
 - CSA: FT1
 - 2.3 INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
 - 2.4 CONDUCTORS: 28 AWG 7/36 STRANDED TINNED COPPER
- TYPICAL ELECTRICAL VALUES:
 - 3.1 VOLTAGE RATING: 300 V
 - 3.2 INSULATION RESISTANCE: 10,000 MEGOHMS/10 FT
 - 3.3 IMPEDANCE: 105 OHMS NOMINAL (GND-SIG-GND)
 - 3.4 CAPACITANCE: 13.5 pf/FT
 - 3.5 PROPAGATION DELAY: 1.45 ns/FT
 - 3.6 CROSSTALK: 10 FT SAMPLE 5ns RISE TIME
 - NEAR END: 3.0%
 - FAR END: 4.0%
- CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.
 - 5 RED EDGE MARK ON CONDUCTOR #1.
 - 6 REEL QUANTITY: 100 FT. REEL MAY CONTAIN SEPARATE LENGTHS. 20 FT MIN PER LENGTH. TWO LENGTHS MAX PER REEL.
 - 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

6	.600	.550±.010	12	2-57040-9
	1.800	1.750±.015	36	2-57040-5
	2.200	2.150±.015	44	2-57040-4
7 OBSOLETE	.900	.850±.010	18	2-57040-3
	3.200	3.150±.015	64	2-57040-2
	1.500	1.450±.010	30	2-57040-1
	.400	.350±.010	8	2-57040-0
	.300	.250±.010	6	1-57040-9
	1.850	1.800±.010	37	1-57040-8
	1.200	1.150±.010	24	1-57040-7
	.800	.750±.010	16	1-57040-6
	.750	.700±.010	15	1-57040-5
	.700	.650±.010	14	1-57040-4
	.500	.450±.010	10	1-57040-3
	.450	.400±.010	9	1-57040-2
	1.400	1.350±.010	28	57040-8
	3.000	2.950±.015	60	57040-7
	2.500	2.450±.015	50	57040-6
	2.000	1.950±.015	40	57040-5
	1.700	1.650±.010	34	57040-4
	1.300	1.250±.010	26	57040-3
	1.250	1.200±.010	25	57040-2
6	1.000	.950±.010	20	57040-1
REEL QTY	DIM C	DIM B	NO OF COND	PART NUMBER

DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 1 PLC DEC ±.1 2 PLC DEC ±.02 3 PLC DEC ±.005 4 PLC DEC ±.0005 ANGLES ±		DWN J.KOPPEN 17JUL92 CHK W.HARRIS 17JUL92 APVD W.HARRIS 17JUL92 PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING		TE Connectivity CABLE, PLANAR RIBBON, #28 AWG 7/36 STRANDED	
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO	SCALE	SHEET	OF
-	-	A2	00779	57040	20:1	1	1
				REV			
				J2			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Flat Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[8132/08100](#) [FST-23A-15](#) [1301210030](#) [C336514-500](#) [902220736002000](#) [902220736006000](#) [28100-0614](#) [281000616](#) [281000625](#) [9L28014-008-H300](#) [28100-0571](#) [28100-0602](#) [281000624](#) [28100-0650](#) [28100-0664](#) [336512-300](#) [336518](#) [336537-CUT-LENGTH](#) [3447/10-100](#) [3625/08-30M](#) [362514100MSF](#) [40WDY00005](#) [5111993623](#) [336506-300](#) [336508-300](#) [C374910](#) [34WDY00006](#) [3749/10-100](#) [375630](#) [3-971111-6](#) [1-1437356-3](#) [57034-6](#) [812504](#) [8132/11100](#) [5-1437214-8](#) [1301210060](#) [1301210058](#) [1301190003](#) [1301210032](#) [5111196336](#) [607.5689.087](#) [607.5689.091](#) [3801/04](#) [1301210020](#) [3754/12](#) [902220736003000](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#) [C3811/10-100](#)