

# SPECIFICATION CONTROL DRAWING

55PC0242

TITLE

FOUR CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 600 VOLT

Date


12-9-96

Revision

B

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0212

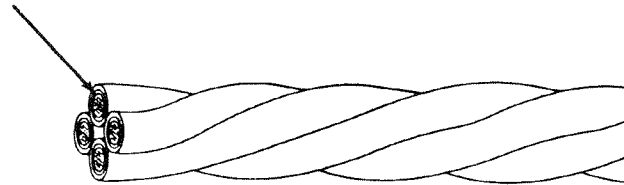

## CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0242-24-*	24	.087	.102	.117	8.06	8.38
55PC0242-22-*	22	.100	.117	.134	11.80	12.19
55PC0242-20-*	20	.119	.139	.159	17.83	18.32
55PC0242-18-*	18	.139	.163	.188	26.83	27.56
55PC0242-16-*	16	.155	.182	.209	34.07	34.92
55PC0242-14-*	14	.189	.221	.253	52.44	53.64
55PC0242-12-*	12	.231	.270	.309	80.33	81.99
55PC0242-10-*	10	.285	.332	.379	126.68	129.57

## CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms)

INSULATION FLAWS:

Impulse Dielectric Test, 8.0 kV (peak)

PART NUMBER:

The "\*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.

Example: AWG 22, red, blue, yellow and green component wires: 55PC0242-22-2/6/4/5

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multi-Conductor Cables](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[8916-GRY-100](#) [8917-BLK-100](#) [8918-GRN/YEL-100](#) [8920-BRN-1000](#) [8920-RED-1000](#) [89907-LT-DEC/GRY-500](#) [CR3909-000](#) [CR3927-000](#) [01342.35T.01](#) [01364.35T.01](#) [CS2885-000](#) [CS8782-000](#) [CS9912-000](#) [6200UE-NAT-U1000](#) [CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [6304FE-877-U500](#) [6309UE-877-1000](#) [6320UE-NAT-U1000](#) [644833-000](#) [6502FE 8771000](#) [6504UE-877-U1000](#) [CW9530-000](#) [CX6543-000](#) [CXA-0066-20-4-9CS2973](#) [CXA-0078-16-1-9CS2405](#) [CXA-0078-22-4-9CS2405](#) [CXA-0078-24-4-9CS2405](#) [CXA-0140-16-6/9-9CS2405](#) [CY0660-000](#) [706/2R-BLACK-EACH](#) [720451-000](#) [730859-000](#) [MCC-USB-4-250](#) [752687-000](#) [768146-000](#) [773159-000](#) [7934A-BLK-1000](#) [8125-CHR-100](#) [8164-CHR-1000](#) [820457-000](#) [8205-CHR-1000](#) [8240-BLK-U1000](#) [82723-NAT-1000](#) [82907-NAT-500](#) [83003-YEL-500](#) [83005-WHT-500](#) [83006-DK-GRN-100](#) [83008-WHT-1000](#) [83009-BLK-100](#)