
KA-11AG-24 VACTIVE

Potter & Brumfield | Potter & Brumfield KRPA

TE Internal #: 3-1393099-7 Potter & Brumfield KRPA, Power Relays, Industrial Panel Plug-In, Monostable, AC, 2 – 3VA Coil Power Rating Class, 2.02VA Coil Power Rating AC

View on TE.com >

Relays, Contactors & Switches > Relays > Power Relays

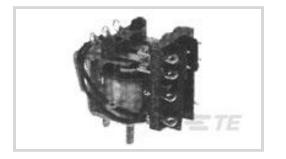

Power Relay Type: Industrial Panel Plug-In

Coil Magnetic System: Monostable, AC

Coil Power Rating Class: [2-3VA]

Coil Power Rating AC: 2.02 VA

Coil Resistance: 85 Ω

Features

Product Type Features

Power Relay Type

E T E connectivity

Industrial Panel Plug-In

Electrical Characteristics

Insulation Initial Dielectric Between Coil & Contact Class

500 - 1000 V

Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
Actuating System	AC
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Insulation Initial Resistance	100 MΩ
Coil Magnetic System	Monostable, AC
	2 – 3 VA
Coil Power Rating AC	2.02 VA
Coil Resistance	85 Ω
Coil Special Features	UL Coil Insulation Class B
Coil Voltage Rating	24 VAC
Contact Switching Load (Min)	300mA @ 12V
Contact Voltage Rating	240 VAC
Body Features	
Product Weight	85 g[2.988 oz]

KA-11AG-24

Potter & Brumfield KRPA, Power Relays, Industrial Panel Plug-In, Monostable, AC, 2 – 3VA Coil Power Rating Class, 2.02VA Coil Power Rating AC



Contact Features

Contact Arrangement	2 Form C (CO)
Contact Current Class	5 – 10 A, 16 A
Contact Current Rating (Max)	10 A
Contact Material	AgCdO
Contact Number of Poles	2
Terminal Type	Solder
Mechanical Attachment	
Relay Mounting Type	Panel Mount
Dimensions	
Length Class (Mechanical)	35 – 40 mm
Height Class (Mechanical)	50 – 60 mm
Width Class (Mechanical)	30 – 40 mm
Product Width	35.7 mm[1.405 in]
Product Length	35.7 mm[1.406 in]
Product Height	50.8 mm[2 in]

Usage Conditions

Environmental Ambient Temperature Class	50 – 70 °C
Environmental Ambient Temperature (Max)	70 °C[158 °F]
Environmental Category of Protection	RTO
Operating Temperature Range	-45 – 70 °C
Packaging Features	
Packaging Method	Package
Product Compliance	
For compliance documentation, visit the product page on TE.com>	Not Yet Reviewed
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Not Yet Reviewed Not Compliant
For compliance documentation, visit the product page on TE.com>	Not Yet Reviewed Not Compliant Restricted Materials Above Threshold

KA-11AG-24

Potter & Brumfield KRPA, Power Relays, Industrial Panel Plug-In, Monostable, AC, 2 – 3VA Coil Power Rating Class, 2.02VA Coil Power Rating AC



Not Yet Reviewed

Not Yet Reviewed for halogen content

Halogen Content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # 4-1393099-0 KA-11AY-24=KA/KB/KC/KR

Also in the Series | Potter & Brumfield KRPA



Customers Also Bought


C For support call+1 800 522 6752

02/16/2021 12:11AM | Page 3

KA-11AG-24

Potter & Brumfield KRPA, Power Relays, Industrial Panel Plug-In, Monostable, AC, 2 – 3VA Coil Power Rating Class, 2.02VA Coil Power Rating AC



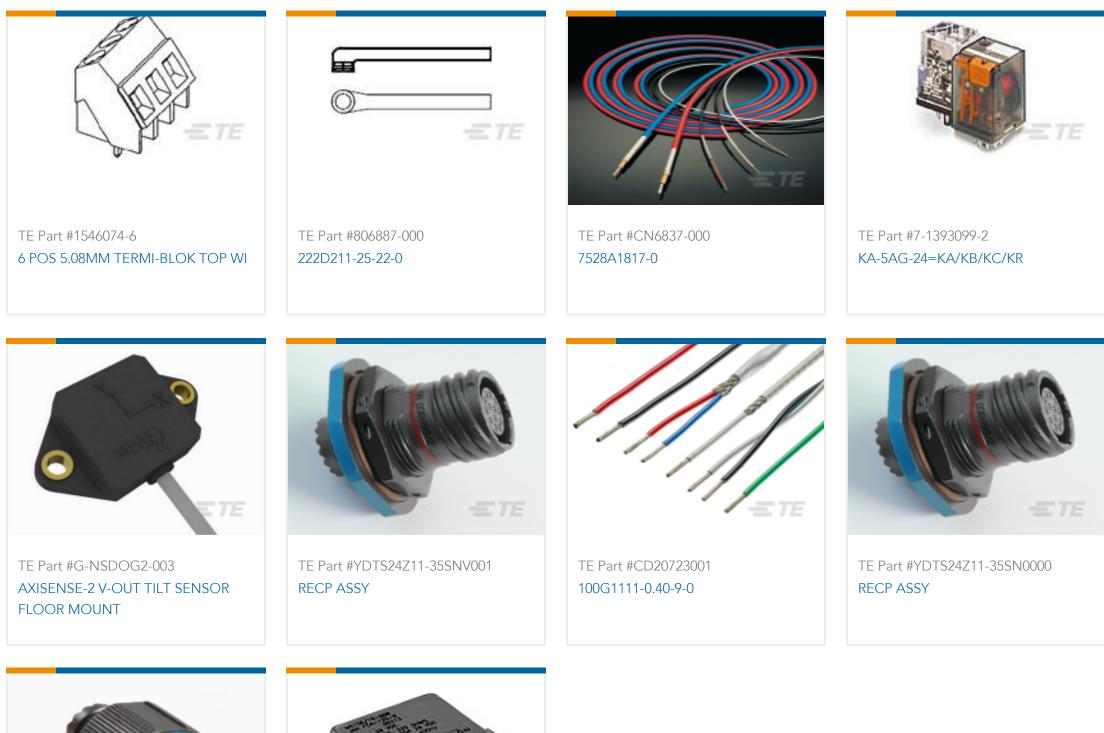



TE Part #YDTS26Z17-08PN0000
PLUG ASSY



TE Part #4-1617791-6 FCA-125-3605L=M83536/36-005L

Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_3-1393099-7_99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1393099-7_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1393099-7_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages KRPA, KRP, KA, KR 5 to 10 Amp General Purpose Relay English

& For support call+1 800 522 6752

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for General Purpose Relays category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 APF30318
 JVN1AF-4.5V-F
 PCN-105D3MHZ
 5JO-10000S-SIL
 5JO-1000CD-SIL
 5JO-400CD-SIL
 LY2S-AC220/240
 LYQ20DC12

 6031007G
 6131406HQ
 6-1393099-8
 6-1393122-4
 6-1393123-2
 6-1393767-1
 6-1393843-7
 6-1415012-1
 6-1419102-2
 6-1423698-4
 6

 1608051-6
 6-1608067-0
 6-1616170-6
 6-1616248-2
 6-1616282-3
 6-1616348-2
 6-1616350-1
 6-1616350-8
 6-1616358-7
 6

 1616359-9
 6-1616360-9
 6-1616931-6
 6-1617039-1
 6-1617052-1
 6-1617090-2
 6-1617347-5
 6-1617353-3
 6-1617801-8
 6

 1618107-9
 6-1618248-4
 CX-4014
 MAHC-5494
 MAVCD-5419-6
 703XCX-120A
 7-1393100-5
 7-1393111-7
 7-1393767-8
 7-1414968-8
 7

 1419130-3
 7-1608047-2
 6-1618248-4
 CX-4014
 MAHC-5494
 MAVCD-5419-6
 703XCX-120A
 7-1393100-5
 7-1393111-7
 7-1393767-8
 7-1414968-8
 7