SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REDUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZEO: UL 1283 CSA CERTIFIED: CSA C22.2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 16 AMP, 120/250 VAC, 16 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.76 mA@ 120V 60Hz 1,27 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir. IN AN AMBIENT, I_0 , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT, I_0 , IS AS FOLLOWS: $I_0 = I_{\infty} - \sqrt{100 - I_0}$

 $I_0 = I_r - \sqrt{\frac{100 - I_0}{100}}$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +100°C HIMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR

CUSTOMER DRAWING CATALOG # 16\GB7 ECN # APPRVD. 09-020709 / 2 DATE 09SEP09 09-020709

TEST SPECIFICATIONS:

INDUCTANCE: 1.2 mH NOMINAL

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C) LINE 1D GROUND: 0.02 µF ±20%

0.475 µF ±20%

LINE TO LINE: DISCHARGE RESISTOR:

680K Ω

L/G AND L/L I.R. NO DISCHARGE RESISTOR: 6000MA (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 HINUTE 1450 VDC FOR 1 MINUTE LINE TO LINE:

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

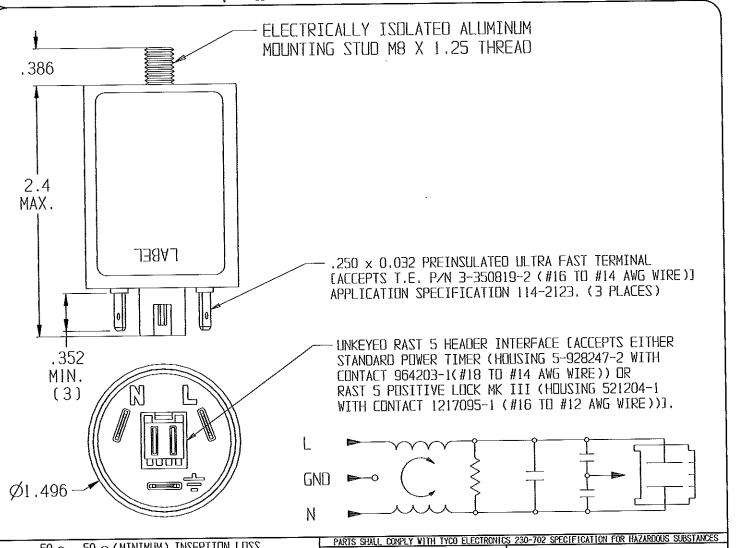

50 A - 50 A (MINIMUM) INSERTION LOSS													-	
FREULENCY MHz	.05	.i	.15	.5	1	2	5	10	20	30	/	1		
COMMON d8	11	16	21	33	39	44	53	55	37	30	1	/	١	
OIFF.	14	19	22	33	41	51	50	45	52	45	/	/		
э ні зіл	1) (5) I	THIS PERSONATION IS COPPLICATION. AND PROPRIETARY TO TWO ELECTRONICS CORPORATION AND ITS WEREINDIES SESSIONALIES AND APPLICATE. IT ANY IN SECURITY OF THAN THOS ELECTRONICS PERSONAL, WITHOUT WHITEN AUTHORIZATION FROM TWO ELECTRONICS OPPORATION, PROPRIETARY, PENSONALINA USA.									A G;	

UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE ±0.025 MATERIAL & FINISH: AS SUPPLIED NOTES:

16908705.ckd

Tyco Electronics DORSON PRODUCTS, 620 S. BUTTERFIELD RD. MUNICELEIN IL 60060

POWER LINE FILTER

TYCO ELECTRONICS PART NO. 3-1609090-9 SCALE: NTS CATE: 23NAR07 CRAVIUS NUMBER: YES | NO <u>WAILAB</u>LE

PJD

6 16\GB7

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B
1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200

20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1

FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44

FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6