

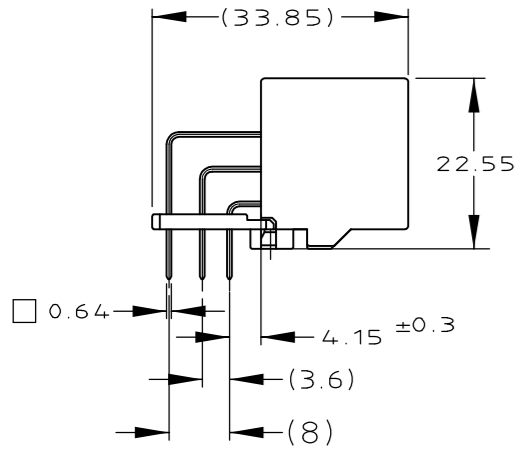
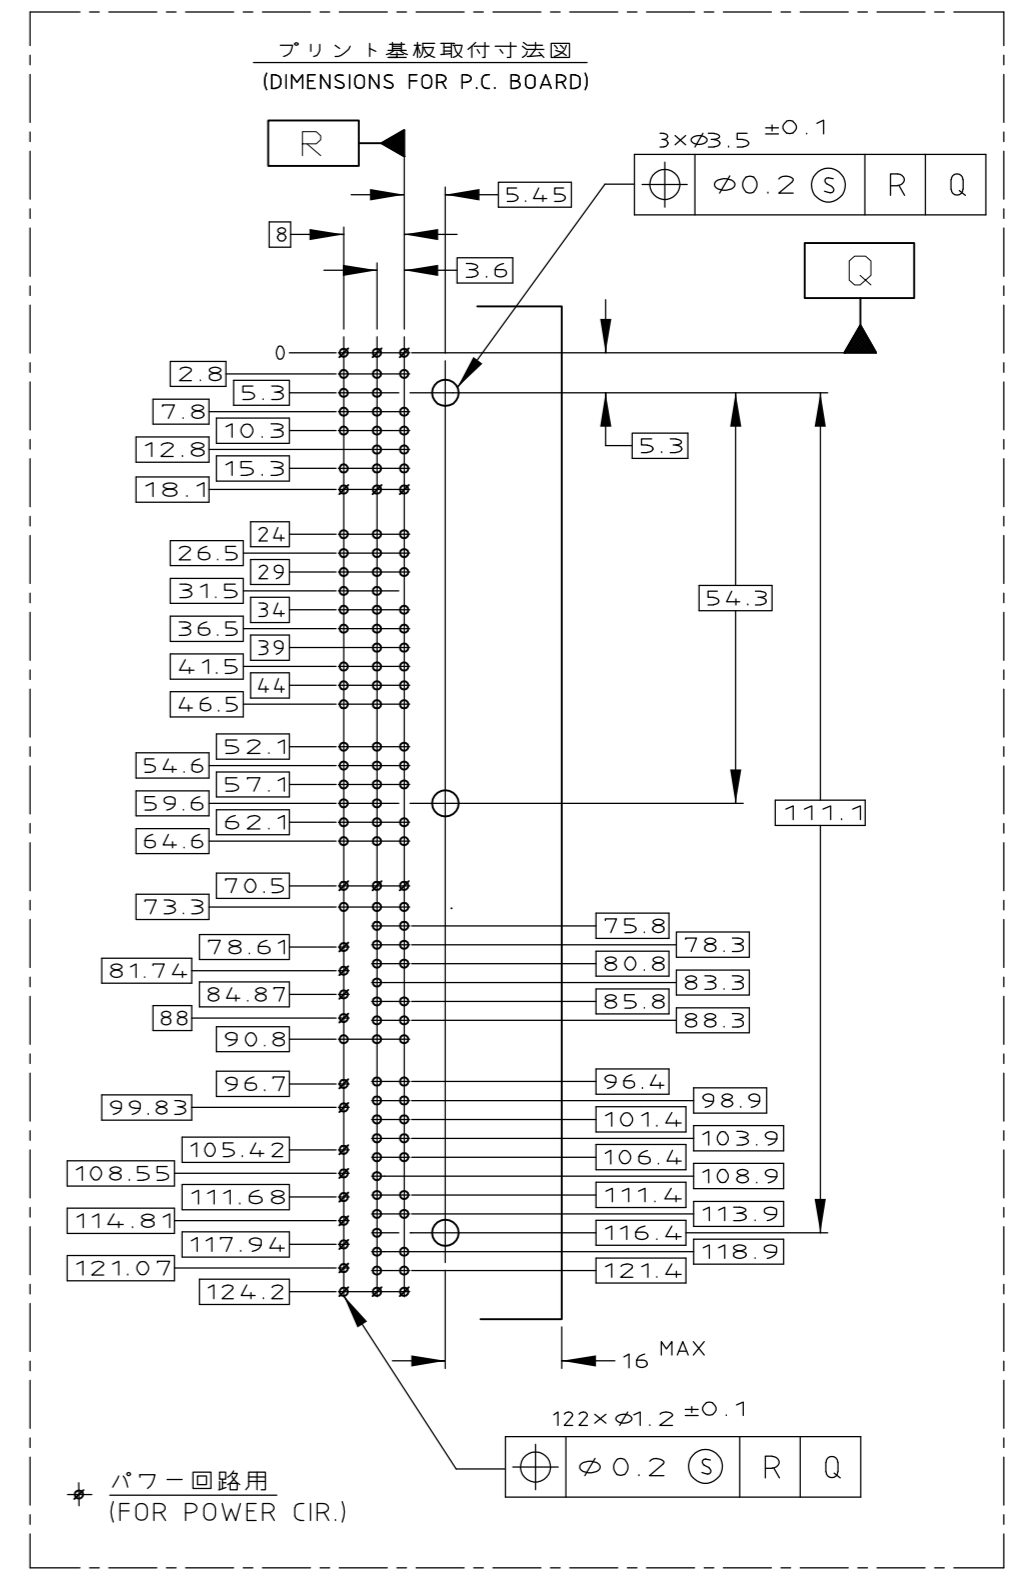
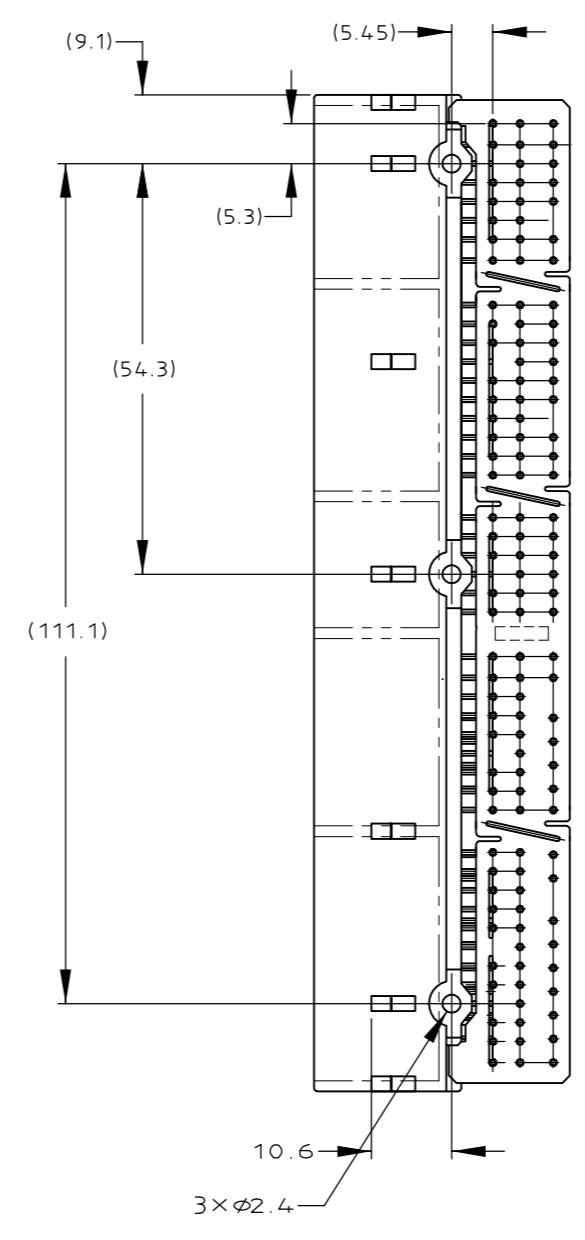
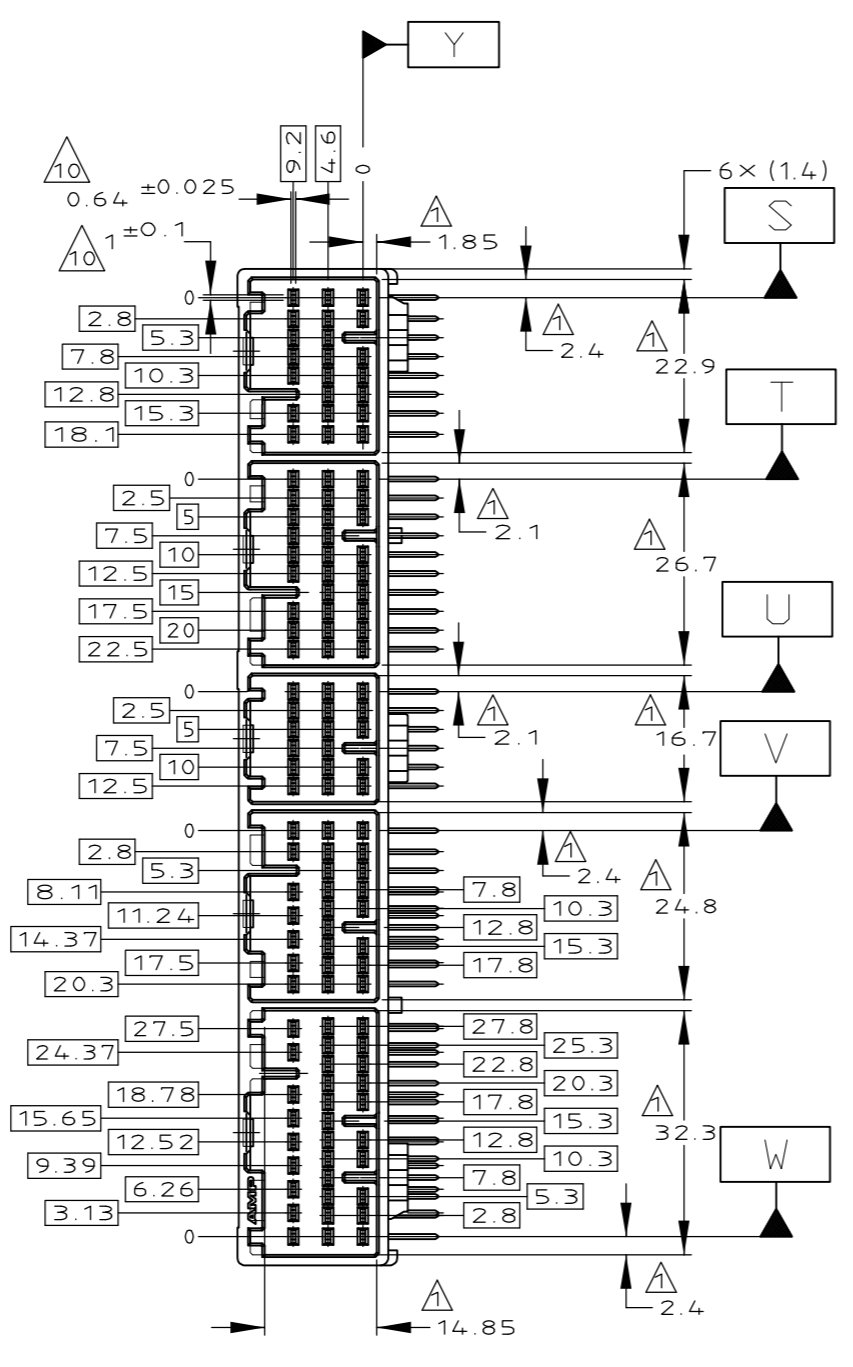
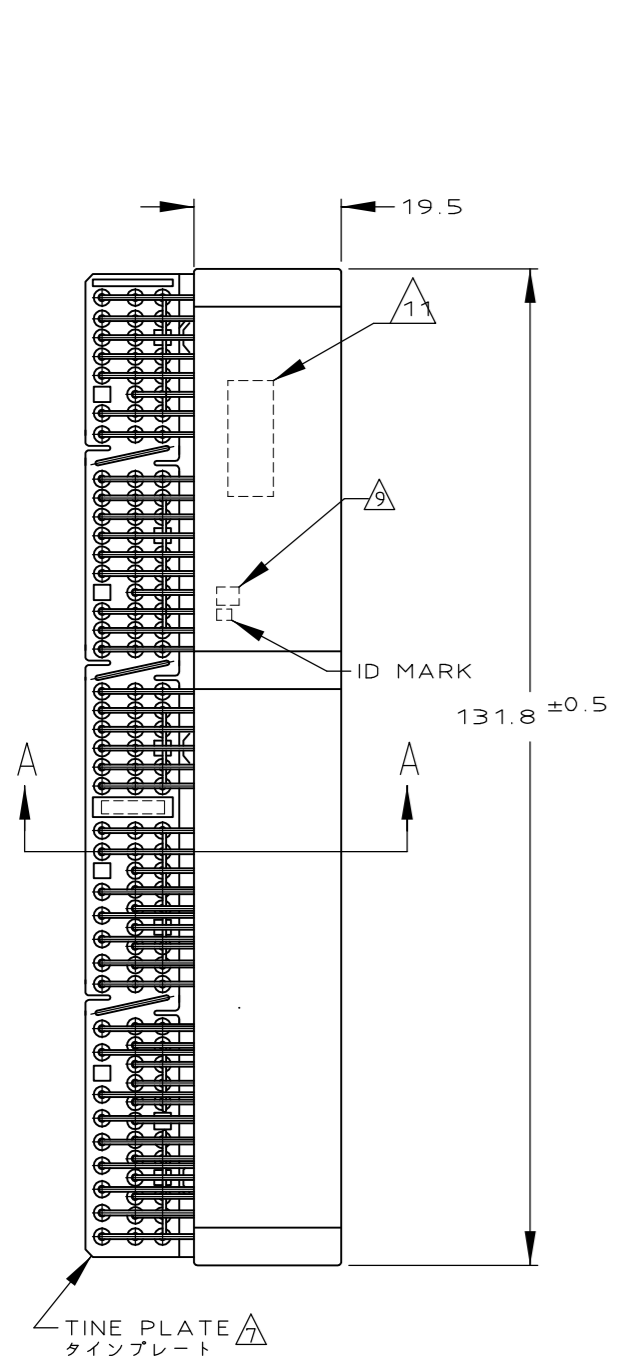


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
K	REVISED	変更 ECR-19-004335	01APR2019	KF	TK

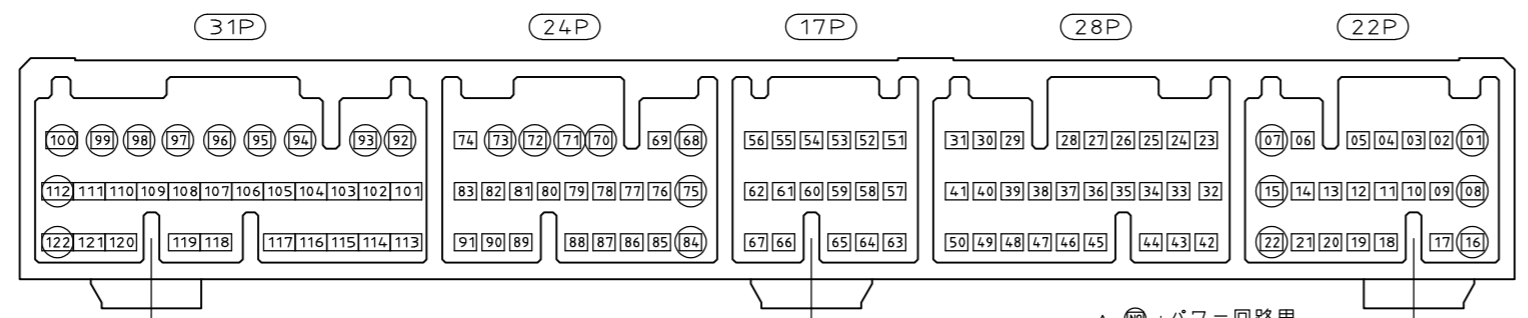

△ Z面より7.5mmの位置で測定  
 △ パワ-回路(24極); FIG 1参照  
 △ 回路番号; FIG 1参照  
 4. 嵌合相手ハウジング型番  
 17P; 353027, 22P;353028, 24P;353029  
 28P; 353030, 31P; 353031  
 5. 推奨取付ねじ: JIS B1115、B1122タッピング  
 ねじ、なべ2種、呼び径3、長さ6以下  
 6. ねじ締付トルク: 0.392N・m MAX  
 △ タインプレートの色は、自然色  
 △ 外箱は段ボール箱仕様  
 △ コンタクト仕上識別用マーク; 表参照  
 △ 0.4φZ|Y|DTM、ただし、  
 TOP OF POST  
 3次DTMについては、[S]、[T]、[U]、[V]、[W]  
 を各々のブロック毎に適用する  
 △ 製造DATE CODEが印字される可能性がある。

△ MEASURED AT THE SECTION 7.5mm FROM Z.  
 △ POWER CIRCUITS (24); SEE FIG 1  
 △ CIRCUIT NUMBERS; SEE FIG 1  
 4. PART NO OF PLUG HOUSINGS TO BE MATED  
 17P; 353027, 22P;353028, 24P;353029  
 28P; 353030, 31P; 353031  
 5. RECOMMENDED SCREW: PAN-HEADED,  
 TYPE 2 TAPPING SCREW  
 OF 3DIA X 6LEN(MAX) (JIS B1115, B1122).  
 6. FASTENING TORQUE FOR SCREW: 0.392N・m MAX.  
 △ TINE PLATE COLOR; NATURAL  
 △ OUTER PACKING; CARTON BOX  
 △ MARKING FOR DISCERNMENT OF THE CONTACTS FINISH;  
 SEE TABLE  
 △ 0.4φZ|Y|DTM  
 TOP OF POST  
 TO BE POSSIBLE TO MARK MANUFACTURING DATE  
 CODE LOCATED APPROXIMATELY AS SHOWN.

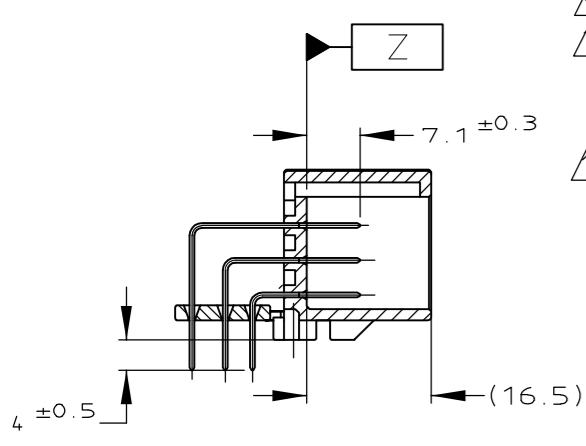

△ FIG 1 CIRCUIT NUMBERS △ 0.4φZ|Y|DTM (FOR POWER CIRCUIT)

PRODUCT SPEC	記号	色	半田付け部	接触部側	金めっき回路NO.	色	型番	
108-5529	58	WHITE	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 122	1~122	BLACK	5353015-2	
	SEE 2-5353015-1 (2-5353015-1参照)							9-5353015-1
	58	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 122	1~122	NATURAL	8-5353015-1	
108-5529	10	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE GOLD × 62	4-6,10-14,17-21,30,32,36,40,41,43-45,47,49,50,54,55,60,61,65,67,69,76-83,85-91,101-109,113-119	NATURAL	2-5353015-1	
108-5673	11	(無色) COLORLESS	SELECTIVE-TIN (MATTE)	SELECTIVE TIN(BRIGHT) × 122	-	NATURAL	353015-3	
製品規格	△	マ-キ-ン-グ	コンタクト仕上	CONTACT SIDE	FINISH OF TAB	△	△	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3

0 PLC ±  
 1 PLC ±  
 2 PLC ±  
 3 PLC ±  
 4 PLC ±  
 ANGLES ±3°

MATERIAL: PBT,COPPER ALLOY

FINISH: SEE TABLE

DWN: N.YASUDA 25DECOO  
 CHK: N.SAI 25DECOO  
 APVD: N.SAI 25DECOO

NAME: 040 III HIGH DENSITY CONNECTOR 122P CAP HOUSING ASSY

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=353015

WEIGHT: 40.91 g

RESTRICTED TO

SCALE: 1:1 SHEET: 1 of 1 REV: K

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)  
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#)  
[70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [800-90-001-10-001000](#)  
[801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#)  
[819-22-004-30-001101](#)