


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LYR	DESCRIPTION	DATE	DWN	APVD
EH	02	Z		REV ECN 0B10-0102-95	09AUG95	MKB	RS
		AA		REV ECN 0B10-0115-95	31AUG95	LMH	RS
		AB		REV ECN 0B10-0135-95	28NOV95	LMH	RS
AD NO CHANGES FROM REV AB TO AD					24AUG06	PJB	
AE ADDED MADISON SPEC					13SEP06	PJB	

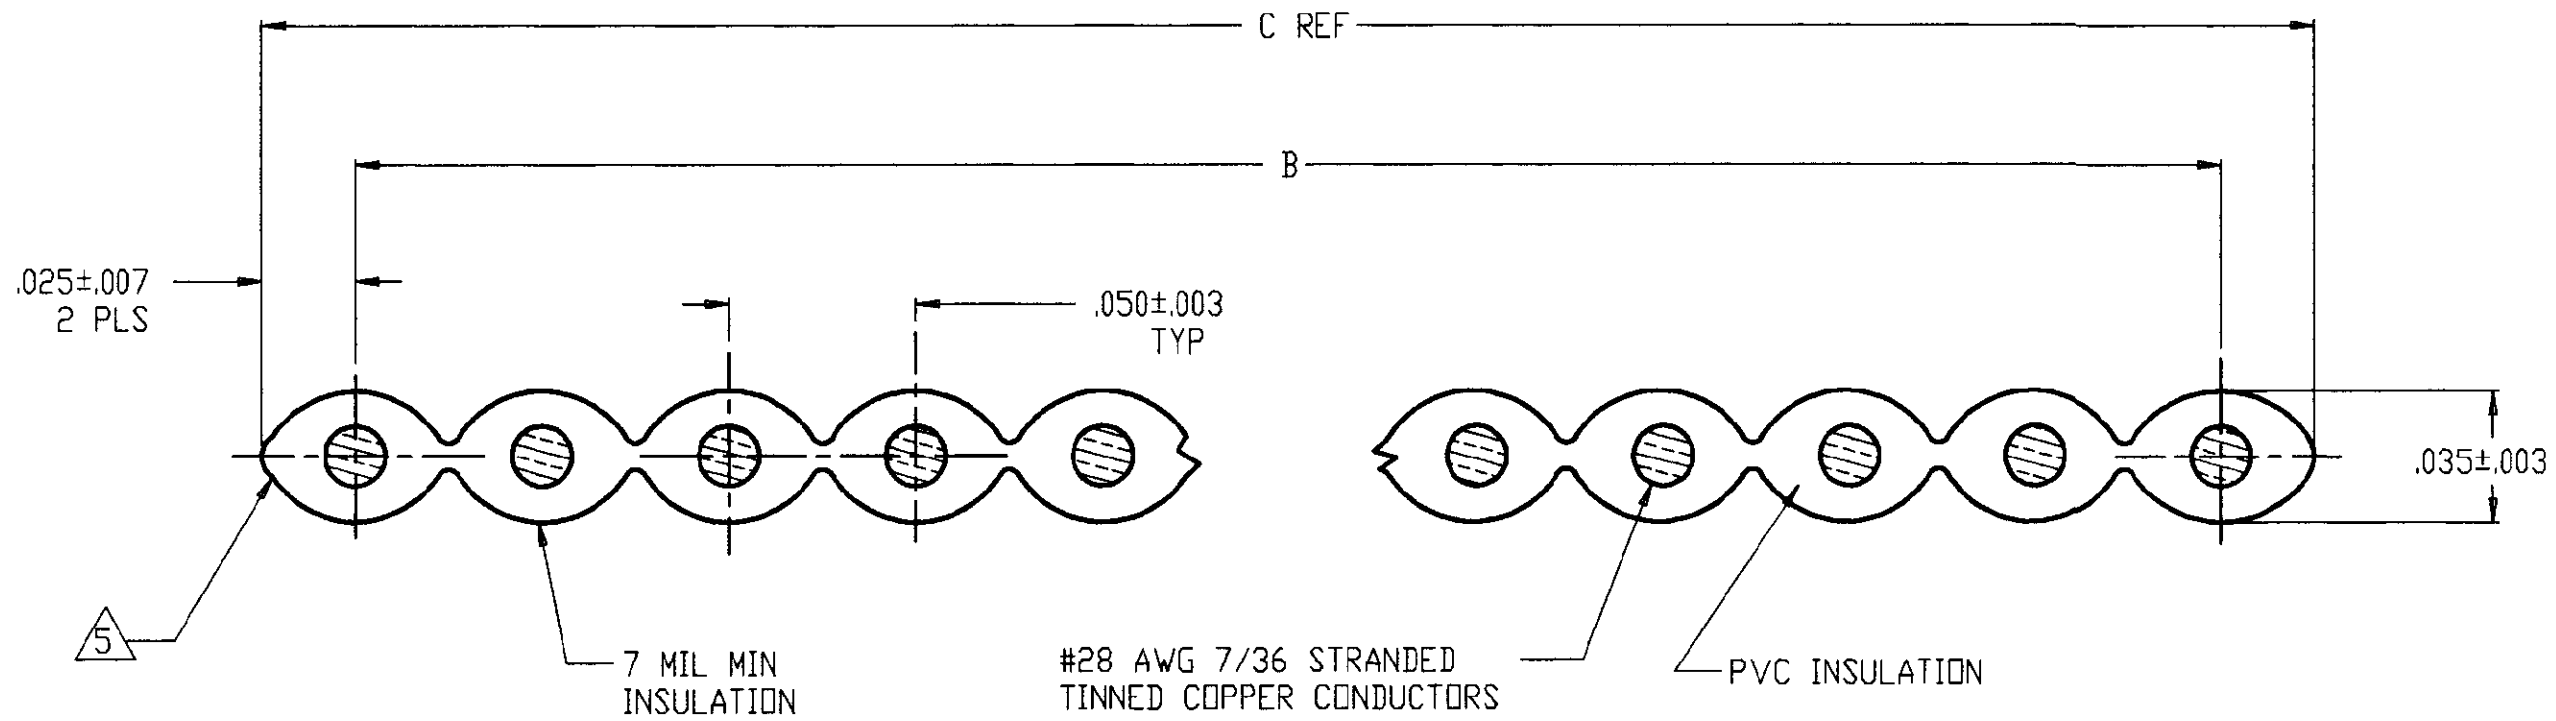

FLAT CABLE CROSS-SECTION

- CABLE CERTIFIED TO:
 - UL CABLE STYLE: 2651
 - CSA: CSA AWM IA 105° C 300V FT1
- CABLE PHYSICAL SPECIFICATIONS:
 - 2.1 TEMPERATURE RATING: 105°C
 - 2.2 FLAMMABILITY:
 - UL: VW1
 - CSA: FT1
 - 2.3 INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
 - 2.4 CONDUCTORS: 28 AWG 7/36 STRANDED TINNED COPPER
- TYPICAL ELECTRICAL VALUES:
 - 3.1 VOLTAGE RATING: 300V
 - 3.2 INSULATION RESISTANCE: 10,000 MEGOHMS/10 FT
 - 3.3 IMPEDANCE: 105 OHMS NOMINAL (GND-SIG-GND)
 - 3.4 CAPACITANCE: 13.5 pf/FT
 - 3.5 PROPAGATION DELAY: 1.45 ns/FT
 - 3.6 CROSSTALK: 10 FT SAMPLE 5ns RISE TIME
 - NEAR END: 3.0%
 - FAR END: 4.0%
- CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.
- RED EDGE MARK ON CONDUCTOR #1.
- REEL QUANTITY: 500 FT CONTINUOUS LENGTH

SUPERSEDED BY
 MADISON SPEC 100-4703

.200	.150±.010	4	3-971111-8
	OBSOLETE	25	3-971111-7
.600	.550±.010	12	3-971111-6
	OBSOLETE	10	3-971111-4
1.400	1.350±.010	28	3-971111-3
	OBSOLETE	26	3-971111-2
	OBSOLETE	34	3-971111-1
	OBSOLETE	20	3-971111-0
	OBSOLETE	50	2-971111-9
	OBSOLETE	40	2-971111-8
1.800	1.750±.015	36	2-971111-5
2.200	2.150±.015	44	2-971111-4
.900	.850±.010	18	2-971111-3
3.200	3.150±.015	64	2-971111-2
1.500	1.450±.010	30	2-971111-1
.400	.350±.010	8	2-971111-0
.300	.250±.010	6	1-971111-9
1.850	1.800±.015	37	1-971111-8
1.200	1.150±.010	24	1-971111-7
.800	.750±.010	16	1-971111-6
.750	.700±.010	15	1-971111-5
.700	.650±.010	14	1-971111-4
.500	.450±.010	10	1-971111-3
.450	.400±.010	9	1-971111-2
3.000	2.950±.015	60	971111-7
2.500	2.450±.015	50	971111-6
2.000	1.950±.015	40	971111-5
1.700	1.650±.010	34	971111-4
1.300	1.250±.010	26	971111-3
1.250	1.200±.010	25	971111-2
1.000	.950±.010	20	971111-1
C	B	NO. OF CONDS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DWN: KOPPENHEFFER 13APR92
 CHK: W.HARRIS 15APR92
 APVD: W.HARRIS 15APR92

AMP Incorporated
 Harrisburg, PA 17105-3608

CABLE, PLANAR RIBBON,
 28 AWG, 7/36 STRANDED

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 971111
 SCALE: 20:1 SHEET 1 OF 1 REV AE

CUSTOMER DRAWING

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Flat Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[F28-A34G](#) [AYT1510-US](#) [902220736002000](#) [902220736006000](#) [9L28010-008-H300](#) [F28-A60G](#) [28100-0571](#) [28100-0664](#) [336518](#) [336537-](#)
[CUT-LENGTH](#) [3447/10-100](#) [362516100MSF](#) [362520100MSF](#) [40WDY00005](#) [AYT51163](#) [336506-300](#) [C374910](#) [3625/24100M](#)
[362540100MSF](#) [3749/10-100](#) [380106-300](#) [3-971111-6](#) [1-1437356-3](#) [812504](#) [5-1437214-8](#) [40WBY00007](#) [3609/12](#) [3539/26-100](#)
[607.5689.087](#) [607.5689.091](#) [3801/04](#) [8124/04](#) [3754/12](#) [3801/12](#) [902220736003000](#) [3625/22100MSF](#) [902220736005000](#) [902220736004000](#)
[C3811/10-100](#) [3625/22-30M](#) [3756/16-300](#) [C3365/18-100](#) [28100-0597](#) [C3365/14SF-300](#) [3365/14-500](#) [050F28V10CR](#) [100F22V5N2CR](#) [171-](#)
[50G](#) [92.051.5453.1](#) [607.5689.088](#)