

REV. 1
DCO 170580


COIL: @ 25°C
 RESISTANCE _____ 2500 OHMS ±10%
 NOMINAL VOLTAGE _____ 8.0 mADC
 MUST OPERATE _____ 4.0 mADC

 MUST RELEASE _____ 2.0 mADC MAX, 0.4 mADC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 15 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 ± 1 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE 15 MS MAX
 _____ RELEASE 10 MS MAX
 _____ CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

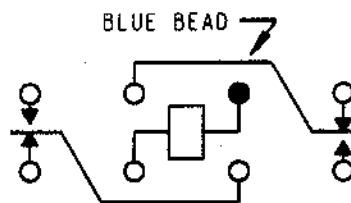

TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO _____
 _____ 2 AMPS @ 28 VDC RESISTIVE _____
 _____ 100,000 OPERATIONS _____

DR. BSH 10/11/01 CK. TLG 10-11-01

CII Technologies
 advanced control electronic solutions

CUST. _____ OPL _____
 CUST. NO. _____ M5752/13-130 _____ REV. _____

3SAT RELAY

3SAT1347A2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Low Signal Relays - PCB category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[6-1393813-4](#) [6-1462039-0](#) [6-1617529-6](#) [617-12](#) [67RPCX-3](#) [7-1393809-0](#) [7-1393813-3](#) [7556072001](#) [80.010.4522.1](#) [FTR-B4GA006Z](#)
[FW1210S02](#) [9-1393813-6](#) [9-1617519-3](#) [9-1617582-5](#) [G6AK-2-H-DC5](#) [A-1.5W-K](#) [DF2E-L2-DC3V](#) [DS1EM24J](#) [DS1ES5J](#) [DS4E-M-DC5V-](#)
[H48](#) [EC2-4.5TNJ](#) [EC2-9NJ](#) [B07B939BC1-0868](#) [1608043-4](#) [1617076-5](#) [1617117-3](#) [1617137-2](#) [1617518-5](#) [1617560](#) [HMB1130K00](#)
[HMB1131S06](#) [HMS1119S01](#) [HMS1131S10](#) [HMS1201S03](#) [HMS1201S87](#) [HMS1205S02](#) [2-1393807-6](#) [2-1617071-2](#) [2-1617594-1](#) [JMGSC-](#)
[5LW](#) [K6-PS](#) [KHS-17D11-110](#) [9-1393761-0](#) [9-1617352-3](#) [9-1617583-1](#) [276XAXH-9D](#) [1617072-3](#) [1617075-4](#) [1617109-2](#) [1617117-2](#)