## SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROYED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA 22.2, # 8 VDE APPROVED: EN 133200

#### OPERATING SPECIFICATIONS

LINE CURRENT/YOLTAGE: 3 AMP/40°C, 120/250YAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.40mA@ 120V, 60Hz 0.70mA@ 250V, 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ic.

IN AN AMBIENT,  $T_0$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $I_0$ , IS AS FOLLOWS:  $I_0 = I_0 - \sqrt{100 - I_0}$ 100 - T<sub>0</sub>  $I_0 = I_r - /$ 60

# RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH.
CURRENT DYERLOAD TEST: 6 TIMES I FOR 8 ZECONOZ

### TEST SPECIFICATIONS:

INDUCTANCE: 1.76mH NOMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250YAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0089µF ±20% LINE TO LINE: 0.012uF ±20% DISCHARGE RESISTOR: 1.5M

L/G ÅND L/L I.R.

6000M₁ (MIN.) @ 100VDC, NO DISCHARGE RESISTOR:

20°C AND 50% RH

CATALOG # 3VB3

ECO # | APPRVD. | DATE

|30N□V06


#### RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500YAC OR 2250YDC FOR 1 MINUTE

1450VDC FOR 1 MINUTE LINE TO LINE:

#### FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

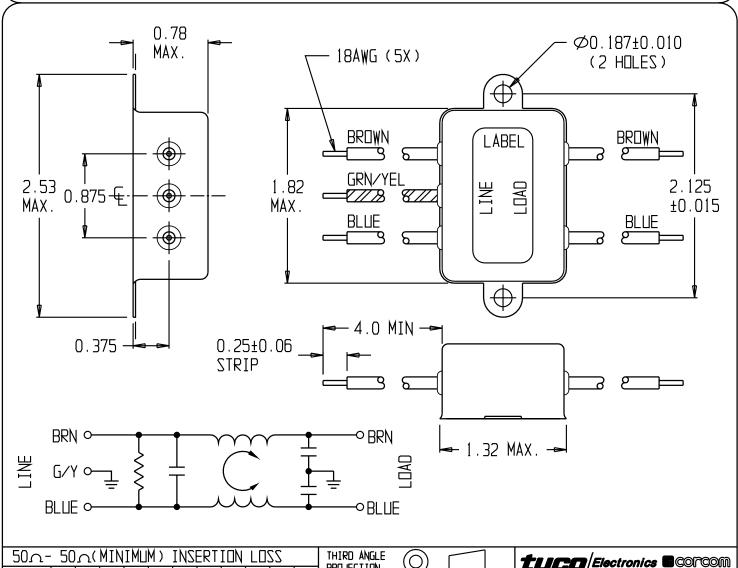

	JOLL 2017 / MINIMININ 1 1/25 / 1 1 1 1 1 1 2 2									LU,	77	ppn jertinki (O) [   [	<b>TI I PATI / Electronics                                    </b>
	FREQUENCY MHz	0.15	0.5	1.0	2.0	5.0	10	20	30			PROJECTION UNLESS OTHERWISE SPECIFIED.	Electronics SCOFCOM 620 S. BUTTERFIELD ROAD MANGELEIN IL 60060
	MHZ											TOLERÂNCE TO BE ±.025	dudmourn no imply
	COMMON	18	31	78	45	50	52	55	60			MATERIAL & FINISH: AS SUPPLIED	CUSTOMER DRAWING 3VB3
	dВ		٦.	50	73	30	J.					This document is proprietory to CORCOM INC.	TYCO: 0-6609021-6
	DIFF.											ond is not to be reproduced nor used for	SCALE: NTS DATE: 12SEP89 CATALOG NO. REV.
l	dВ											nonufocturing purposes except on CORCOM'S prior written consent.	ORW. BY: JF ORIG: CW 3VB3 B

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B
1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200

20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1

FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44

FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6