

Type 470 Series

Key Features

- Stable High Resolution Cermet Element
- 0.5 Watt Rating at 85°C
- Space-Saving Device
- Proven Reliability
- -55°C to +125°C Temperature Range
- Sealed to Withstand Wave Soldering
- Sealed to Withstand Immersion Cleaning



For applications that demand a durable, miniature trimming potentiometer, this military style offers quality at the right price. Cermet element technology ensures stability and performance in these 6mm diameter components. All units are fully sealed to withstand immersion in normal board washing solvents.

Characteristics - Electrical

Resistance Range:	100R to 1M
Resistance Values:	2 and 5, each decade
Resistance Tolerance:	± 10%
End Resistance:	10 Ohms or 1%, whichever is greater
Slider Current:	10 mA or within power rating, Max.
Power Rating:	0.5W at 85°C derating to zero at 125°C
Isolation Voltage:	300 V dc or ac peak
Limiting Element Voltage:	200 V dc or ac RMS, Max.
Brief Surge Voltage:	600 V ac for one minute
Insulation Resistance:	1000 M Ohms at 500 V dc, Min.
Resolution:	Essentially Infinite
Rotational Noise (CRV):	3 Ohms or 3 %, whichever is greater
Temperature Coefficient:	± 250 ppm/°C
Electrical Adjustment:	240° Nominal

Characteristics - Mechanical


End Stop:	40 mNm Min.
Starting Torque:	30 mNm Max.
Mechanical Adjustment:	260° Nominal
Weight:	0.57 gm Max.

Characteristics - Environmental

Temperature Range:	-55°C to +125°C
Thermal Shock:	5 Cycles -55°C to +150°C
Bump Severity:	4000 Bumps; 40G
Vibration Severity:	10 - 500Hz; 30 G ΔR<1%
Rotational Life:	200 Cycles
Load Life at 70°C:	1000 Hours at 0.5 W
Sealing:	Sealed for immersion & board washing processes
Climatic Category:	55/125/21

Type 470 Series

Dimensions

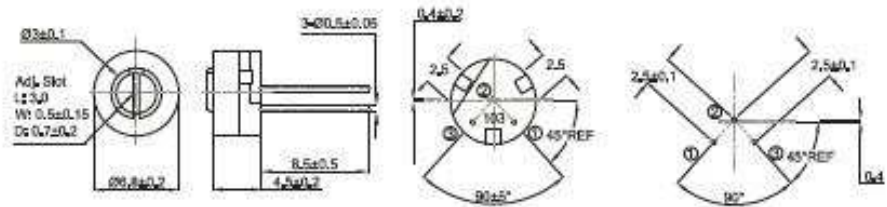

How to Order



OBSOLETE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Trimmer Resistors - Through Hole](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[64W205](#) [M63M103KB40](#) [M63X104KB40](#) [76PR500K](#) [79PR5K](#) [PT15NV24-103A2020](#) [CT6P-103](#) [CB10MV473ME](#) [4270W105K](#)
[56PR2MEG](#) [82PR2KLFTB](#) [62MR100](#) [72XWR20K](#) [9702-2SL-1](#) [89PHR10K](#) [78SR5K](#) [CT15NV15103M](#) [78SBWR1K](#) [343P10](#) [PT15NH02-104A2020-S](#) [VG039NSNXTB103](#) [PTC15NH05-103A2020](#) [PTC15NV02-104A2020](#) [PTC15LV02-103A2020](#) [PT15GV02-27402](#) [RJ-13SR203](#)
[RJ-5EW202](#) [3292W-1-201M](#) [3362F-1-205LF](#) [3362X-1-272LF](#) [3386H-EY5-202LF](#) [3059Y-1-200LF](#) [3386X-DF6-503LF](#) [3260W-1-500](#)
[3329S-1-204LF](#) [PT10MV10-203A2020-S](#) [PT15NV02-503A2020-E-S](#) [PTC10MV10-472A0505](#) [PV36W103C01B00](#) [CN-15.1-22K](#) [CN-15.1-3K3](#) [CN-15.2-10K](#) [CN-15.2-470R](#) [R0141-2-100K](#) [R0141-2-10K](#) [R0141-2-1K](#) [R0141-2-20K](#) [R0141-2-5K](#) [1028F-500K](#) [R16148-1A-1-A22K](#)