


4805 (3/11)



4

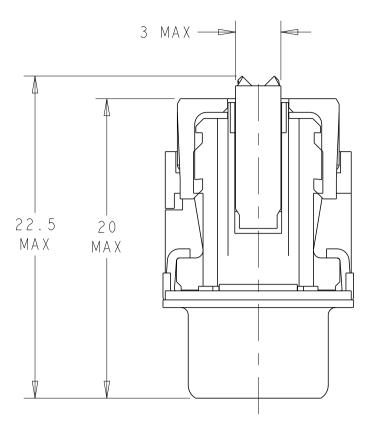

1.	CABLES TO BE USED ALL COMMERCIALLY SILVER PLATED COF	А
2.	9 POSITION VERSIC) N
$\sqrt{3}$	USE ONLY WITH STF	۲A
4	9 POSITION = 2 15 POSITION = 2 25 POSITION = 2	R E 1 - 1 - 1 - 1 -
5.	CONTACTS ARE STAM	1P
6	PACKAGED IN BLIST	Ē
$\overline{2}$	PACKAGED ON REELS	ò.
8.	PLATING DETAILS:	А
		S U S U [R
9	PRESS-ON COVER PF	20
\bigwedge	FLANGES WITH M3 (SELF-LOCKING NUTS TORQUE RETENTION	5
11.	ALL PARTS MARKED	W

3

	VV	IRE INFO			
OVERALL CONDUCTOR CROSS-SECTIONAL AREA IN mm ²	AWG RANGE	OVERALL CONDUCTOR DIAMETER IN mm ²	NO. OF SINGLE STRANDED WIRES	CONDUCTOR	PVC INSULATING SLEEVE DIA
	30	0.25 3	1	SOLID	1.0/1.1
	28	0.32	1	SOLID	0.8/1.1
0.09/3	28		7	STRANDED	0.8/1.1
0.14	26		7	STRANDED	0.8/1.1

										1	
	Not Included	6 9	3.0 DIAMETER HOLE	53.42 38.84	47.04 ±0.13	2.76 5.99	40.78 7.65	26.60 7	25	V42254-A6235-C225	1 - 1 3 9 3 4 8 7 - 8
	Included		3.0 DIAMETER HOLE	69.70 55.30	63.50 ±0.13	2.76 5.99	57.44 7.65	41.80 11	37	V42254-A5235-W235	6 - 1 3 9 3 4 8 6 - 2
	Included		3.0 DIAMETER HOLE	53.42 38.84	47.04 ±0.13	2.76 5.99	40.78 7.65	26.60 7	25	V42254-A5235-W234	6 - 1 3 9 3 4 8 6 - 1
OBSOLETE	Included		3.0 DIAMETER HOLE	31.19 16.79	25.00 +0.12/-0.13	2.74 6.12	18.73 7.72	7.60 2	9	V42254-A5235-W232	5-1393486-9
	Not Included		3.0 DIAMETER HOLE	69.70 55.30	63.50 ±0.13	2.76 5.99	57.44 7.65	41.80 11	37	V42254-A5235-C237	4 - 1 3 9 3 4 8 6 - 6
	Not Included		3.0 DIAMETER HOLE	53.42 38.84	47.04 ±0.13	2.76 5.99	40.78 7.65	26.60 7	2 5	V42254-A5235-C225	4 - 1 3 9 3 4 8 6 - 4
	Not Included	6	3.0 DIAMETER HOLE	39.52 25.12	33.30 +0.15/-0.1	2.74 6.12	27.26 7.69	15.20 4	15	V42254-A5235-C215	4 - 1 3 9 3 4 8 6 - 3
	Not Included		3.0 DIAMETER HOLE	31.19 16.79	25.00 +0.12/-0.13	2.74 6.12	18.73 7.72	7.60 2	9	V42254-A5235-C209	4 - 1 3 9 3 4 8 6 - 2
	Not Included		M3 SELF-LOCKING NUTS	31.19 16.79	25.00 +0.12/-0.13	2.74 6.12	18.73 7.72	7.60 2	9	V42254-A5234-C209	1 - 1 3 9 3 4 8 6 - 4
OBSOLETE	Not Included		4-40 SELF-LOCKING NUTS	53.42 38.84	47.04 ±0.13	2.76 5.99	40.78 7.65	26.60 7	2 5	V42254-A5232-C225	9 - 1 3 9 3 4 8 5 - 3
	Not Included		4-40 SELF-LOCKING NUTS	39.52 25.12	33.30 +0.15/-0.1	2.74 6.12	27.26 7.69	15.20 4	15	V42254-A5232-C215	9 - 1 3 9 3 4 8 5 - 2
	Not Included		4-40 SELF-LOCKING NUTS	31.19 16.79	25.00 +0.12/-0.13	2.74 6.12	18.73 7.72	7.60 2	9	V42254-A5232-C209	9 - 1 3 9 3 4 8 5 - 1
OBSOLETE	Not Included	7	4-40 SELF-LOCKING NUTS	39.52 25.12	33.30 +0.15/-0.1	2.74 6.12	27.26 7.69	15.20 4	15	V42254-A4232-C215	6-1393485-8
	STRAIN RELIEF	PKG	FLANGE OPTION	A B	С	F G	H L	M N	NO OF POSITIONS	SIEMENS PART NUMBER	TE CONNECTIVITY PART NUMBER
	THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009 DUMENSION FOR THE FORMULE OF THE FORMULE OF THE CONNECTIVITY						Connectivity				
					DIMENSIONS: mm O PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 2 PLC ±- 2 PLC ±- 2 PLC ±- 3 PLC ±- 2 PLC ±- 2 PLC ±- 2 PLC ±- 3 PLC ±- 2 PLC ±- 2 PLC ±- 3 PLC ±-						
					$ $ \forall \square	$ 3 PLC \pm 4 $	+1° -	UN SPEC	SIZE CAGE CC	DDE DRAWING NO	RESTRICTED TO
					MATERIAL -	ANGLES FINISH -	<u>+1</u>	_	TA 1 0 0 7 7	79 C-9-1393485-1	-
					-	-	CUSTOME	R DRAWING			HEET OF REV
					I						

	2					1			
LOC					REVISIONS				
GP 00			LTR		DESCRIPTION		DATE	DWN	APVD
			F	REDRAWN PER	ECO-12-008266		27AUG2012	CJV	CWR
			G	REVISED PER	ECO-13-006091		30APR2013	CJV	CWR
			J	REVISED PER	ECO-15-007873		20JUN2015	AP	SB

D

В

. AVAILABLE RIBBON CABLE WITH PVC INSULATION AND TIN OR PER WIRES. SEE WIRE INFORMATION IN TABLE BELOW. SHOWN. AIN RELIEF CLAMP. RELIEF CLAMPS: 4-1393560-3 (V42254-A4000-D9) 4-1393560-5 (V42254-A4000-D15) 4-1393560-6 (V42254-A4000-D25) 4-1393560-7 (V42254-A4000-D37) IPED AND FORMED. ER PACKS. ALL MEET PERFORMANCE LEVEL 2 PER DIN 41652 P.2 AND P.4. UNDERPLATE: NICKEL OVER ENTIRE CONTACT SURFACE ALTERNATE 1: GOLD SURFACE ALTERNATE 2: GOLD FLASH OVER PALLADIUM-NICKEL TRE TERMINATION END: MATTE TIN SHELL PLATING: BRIGHT TIN OVER NICKEL ROVIDED SEPARATELY (NOT PRE-ASSEMBLED) (BLACK) OR 4-40 (BLUE) 270 N-cm

```
WITH TE LOGO.
```

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for D-Sub Standard Connectors category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

DCM37S732N DAM15P500 DEV09S364GTLF DEM09P032N DDM50P732N DAM15S332N 173109-2218 173109-2466 173109-2436 173109-2435 56F706-005-LI 56F711-015 015-0341-000 015-0372-008 015-8544-011 017041-0005 012-0515-000 012-9507-034 012-9507-114 012-9534-001 020745-0008 609-25P M24308/2-23Z M243082310F M243082410F M243082411F M24308/4-21 CT1A18-11PSA206 CT1N36-5SC CT2-16S-17PS CT2-20-15PCAU CT2-24-12PS CT2-24-28PSF127A206 CT2-32-9PC CT6F9767-14-4-14S-5PC CT6FA10SL-4PS CT7-18-10SC CT7-18-10SCAU CT7-18-12SCAU CT7-18-1PC CT7-18-1PCAU CT7-18-21SCAU M83513/01-FC M83723/76W24619 L/C M85049/48-3-2F 69001-865 6STD09PCM99B70X 6STD09SCT99S40X 6STD15PCT99S40X 6STD15SCM99B30X