


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 PART INDICATED IS PACKAGED IN "SINGLE TUBES"
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

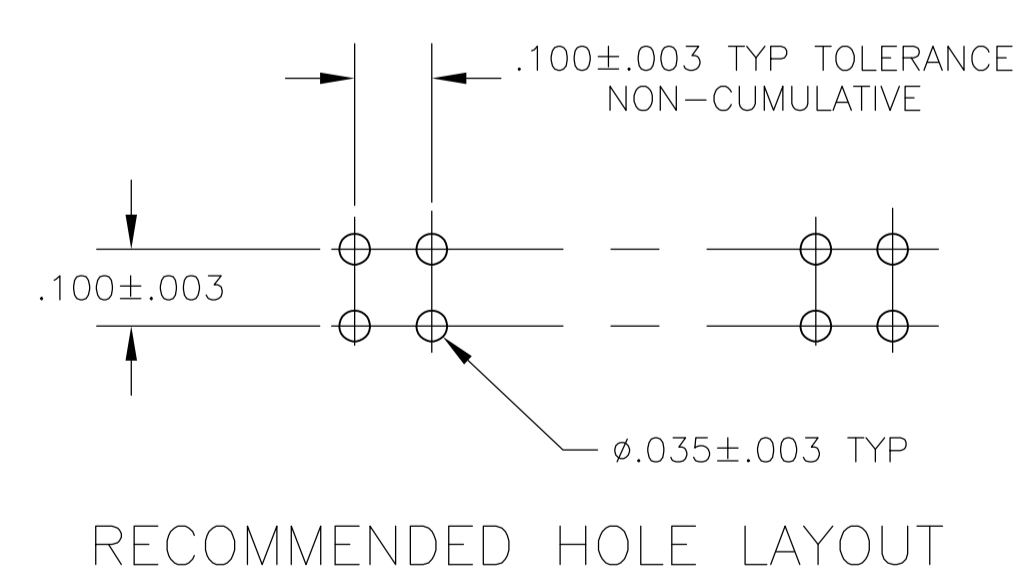

OBSOLETE 	3.984	3.900	39	80	4-146090-0
	3.884	3.800	38	78	-3-146090-9
	3.784	3.700	37	76	-3-146090-8
	3.684	3.600	36	74	-3-146090-7
	3.584	3.500	35	72	-3-146090-6
	3.484	3.400	34	70	-3-146090-5
	3.384	3.300	33	68	-3-146090-4
	3.284	3.200	32	66	-3-146090-3
	3.184	3.100	31	64	-3-146090-2
	3.084	3.000	30	62	-3-146090-1
	2.984	2.900	29	60	-3-146090-0
	2.884	2.800	28	58	-2-146090-9
	2.784	2.700	27	56	-2-146090-8
	2.684	2.600	26	54	-2-146090-7
	2.584	2.500	25	52	-2-146090-6
	2.484	2.400	24	50	-2-146090-5
	2.384	2.300	23	48	-2-146090-4
	2.284	2.200	22	46	-2-146090-3
	2.184	2.100	21	44	-2-146090-2
	2.084	2.000	20	42	-2-146090-1
	1.984	1.900	19	40	-2-146090-0
	1.884	1.800	18	38	-1-146090-9
	1.784	1.700	17	36	-1-146090-8
	1.684	1.600	16	34	-1-146090-7
	1.584	1.500	15	32	-1-146090-6
	1.484	1.400	14	30	-1-146090-5
	1.384	1.300	13	28	-1-146090-4
	1.284	1.200	12	26	-1-146090-3
	1.184	1.100	11	24	-1-146090-2
	1.084	1.000	10	22	-1-146090-1
OBSOLETE	.984	.900	9	20	-1-146090-0
SUPERSEDED BY 6-146255-0	.884	.800	8	18	146090-9
OBSOLETE	.784	.700	7	16	146090-8
SUPERSEDED BY 5-146255-8	.684	.600	6	14	146090-7
SUPERSEDED BY 5-146255-6	.584	.500	5	12	146090-6
SUPERSEDED BY 5-146255-5	.484	.400	4	10	146090-5
	.384	.300	3	8	146090-4
	.284	.200	2	6	146090-3
	.184	.100	1	4	146090-2
SUPERSEDED BY 5-146255-1	.084	—	—	2	146090-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J KNAUB 08FEB94		TE Connectivity	
DIMENSIONS: INCHES		C/K G DUBNICZKI 08FEB94			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G DUBNICZKI 08FEB94		NAME	
0 PLC ± -		PRODUCT SPEC		HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 Q WITH .025 SQ POSTS	
1 PLC ± -		APPLICATION SPEC		SIZE	
2 PLC ± -		WEIGHT		CAGE CODE	
3 PLC ± .005		CUSTOMER DRAWING		DRAWING NO	
4 PLC ± -		SCALE 4:1		SHEET 1 OF 1	
ANGLES ± -		REV D		REV	
MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK POST: COPPER ALLOY		FINISH POSTS: 500005 GOLD ON CONTACT AREA, 500100-000005 WHITE, TIN-LEAD ON SOLDER TAIL ALL OVER, 500009 NICKEL		RESTRICTED TO	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)