


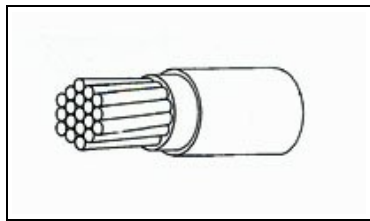

44A0111-12-0-US Product Details

[Share](#) | [Print](#) | [Email](#)


44A0111-12-0-US

TE Internal Number: 282262-000

Active

Spec 44, Spec 55 and Spec RCW Wire and Cable

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Cable Type = Spec 44
- Wire Source = United States
- Cable Style = Primary
- Wire Size (AWG/CM) = 12 AWG
- Voltage Rating = 600 VAC

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#)
[Request Sample](#)
[Find Similar Products](#)
[Buy Product](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • WIRE, ELECTRIC, RADIATION-CROSSLINKED, TIN-COATED CO... (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Related Products:</p> <ul style="list-style-type: none"> • Tooling

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Cable Type = Spec 44 • Cable Style = Primary <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Voltage Rating (VAC) = 600 <p>Dimensions:</p> <ul style="list-style-type: none"> • Conductor Outer Diameter (mm [in]) = 2.23 [0.088] <p>Body Features:</p> <ul style="list-style-type: none"> • Wire Size (AWG/CM) = 12 AWG • Conductor Type = Tin-Plated Copper • Wire Color = Black • Nominal Outside Diameter (mm [in]) = 2.74 [0.108] • Wire Diameter (mm [in]) = 2.74 [0.108] <p>Configuration Features:</p> <ul style="list-style-type: none"> • Number of Conductors = 1 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • Government/Industry Qualification = No • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Temperature Range (°C) = -65 - +150 • Wire Size - Details = 12 AWG 2.98 mm², 0.0046 in², 37 x 28 AWG <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = General Purpose - Lightweight <p>Packaging Features:</p> <ul style="list-style-type: none"> • Wire Source = United States <p>Other:</p> <ul style="list-style-type: none"> • Brand = Raychem

Feedback

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hook-up Wire](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[002333-000](#) [M81044/12-22-6](#) [M81044/9-8-9](#) [CV5509-000](#) [743094-001](#) [81044/12-18-9CS3209](#) [8538-009-1000](#) [ATFC0311-20-5D](#) [EF5675-000](#) [BFWUL3239-24-PINK](#) [22759/34-16-9CS2621](#) [22759/42-24-9CS2620](#) [933205-000](#) [284711-000](#) [961473-000](#) [99M0111-20-2](#) [A00594-000](#) [190571-000](#) [22759/41-12-9CS2620](#) [22759/41-16-9CS2620](#) [22759/43-10-9CS2873](#) [265925-000](#) [CM9524-000](#) [31510-010-250](#) [31514-009-500](#) [34401-010-250](#) [34402-010-500](#) [34430-010-250](#) [M81044/9-4-9](#) [391441-BK007](#) [400R0111-10-9](#) [431660-000](#) [ATFC0311-20-0](#) [ATFC0311-20-3](#) [44/7024-26-9-9](#) [44A0112-22-9CS3184](#) [456157-000](#) [55/0312-26-6L-CS2570](#) [31514-010-4000](#) [55A0811-12-9](#) [55A6087-20-9-9-9](#) [55A6315-22-9-9CS2632](#) [55A7400-22-9/96-9CS2275](#) [55A9002-30-5](#) [55PC0211-20-5CS2502](#) [55PC0811-6-9CS2637](#) [55PC1211-22-9-9CS3278](#) [C07683-000](#) [32820-009-5000](#) [34020-008-2000](#)