


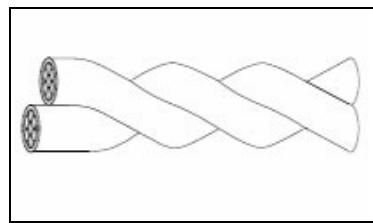

44A0121-18-0/9-US Product Details

[Share](#) | [Print](#) | [Email](#)


Spec 44, Spec 55 and Spec RCW Wire and Cable

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Cable Type = Spec 44
- Wire Source = United States
- Cable Style = Primary
- Wire Size (AWG/CM) = 18 AWG
- Voltage Rating = 600 VAC

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

44A0121-18-0/9-US

TE Internal Number: 383263-000

Active

[Add to My Part List](#) |
 [Request Sample](#) |
 [Find Similar Products](#) |
 [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • TWO CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, LIGHTWE... (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	---

[List all Documents](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Cable Type = Spec 44 • Cable Style = Primary <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Voltage Rating (VAC) = 600 <p>Dimensions:</p> <ul style="list-style-type: none"> • Conductor Outer Diameter (mm [in]) = 1.27 [0.050] <p>Body Features:</p> <ul style="list-style-type: none"> • Wire Size (AWG/CM) = 18 AWG • Conductor Type = Tin-Plated Copper • Wire Color = Black, White • Nominal Outside Diameter (mm [in]) = 3.29 [0.130] • Wire Diameter (mm [in]) = 1.65 [0.065] <p>Configuration Features:</p> <ul style="list-style-type: none"> • Number of Conductors = Twisted Pair 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • Government/Industry Qualification = No • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Temperature Range (°C) = -65 - +150 • Wire Size - Details = 18 AWG 0.96 mm², 0.0015 in², 19 x 30 AWG <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = General Purpose - Lightweight <p>Packaging Features:</p> <ul style="list-style-type: none"> • Wire Source = United States <p>Other:</p> <ul style="list-style-type: none"> • Brand = Raychem
--	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [1213 009U1000](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)
[44A0121-12-996CS2275](#) [44A0121-20-09-MX](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#)
[55PC1131-20-029-9](#) [Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [3613-D15-A1000](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB](#)
[0101000](#) [8342 060100](#) [8740 060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406](#)
[T35100](#) [3613 D151000](#) [1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [1533R 0061000](#) [RIT1000](#) [1533R](#)
[006A1000](#) [9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8333 0601000](#) [1533R 0021000](#) [1583A 012U1000](#) [1583A](#)
[010U1000](#)