


SPECIFICATION CONTROL DRAWING

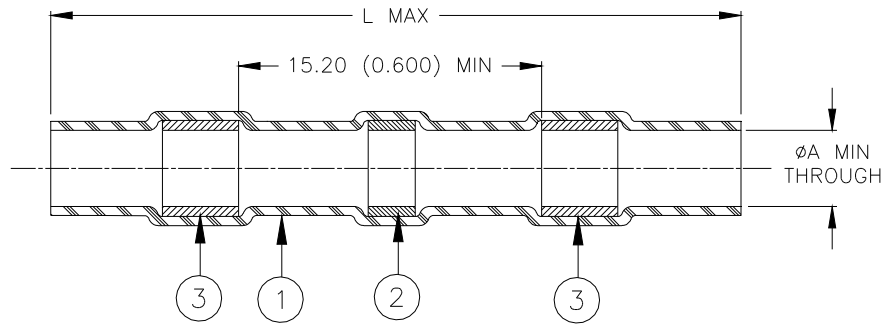

Product Revision		Size Code Color Items 3	Product Dimensions		Conductor Dimensions		Selection Guide			
Product Name	L max		øA min	øB		Total mm ²		Total CMA		
				min	max	min	max	min	max	
CWT-9001	C	Clear	26.0 (1.025)	1.7 (0.065)	0.4 (0.015)	1.7 (0.065)	0.3	0.8	450	1500
CWT-9002	B	Red	42.0 (1.655)	2.7 (0.105)	1.3 (0.050)	2.7 (0.105)	0.8	2.0	1250	3500
CWT-9003	B	Blue	42.0 (1.655)	4.5 (0.180)	1.8 (0.070)	4.5 (0.180)	2.0	4.0	2500	7200
CWT-9004	B	Yellow	42.0 (1.655)	6.0 (0.235)	2.8 (0.110)	6.0 (0.235)	4.0	6.0	6100	19000
CWT-9005	B	Grey	42.0 (1.655)	7.0 (0.275)	3.2 (0.125)	7.0 (0.275)	6.0	10.0	12000	25000


MATERIALS


- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyolefin. Transparent clear.
- SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE CD18 per ANSI/J-STD-006.
 FLUX: TYPE ROM1 per ANSI/J-STD-004.
- MELTABLE RINGS: Thermally stabilized thermoplastic. Color: see table.

APPLICATION

- These controlled soldering devices are designed to splice tin-plated or bare copper stranded wires rated for at least +85°C.
- Temperature range: -55°C to +125°C.
- For installation procedure and application equipment consult RPIP-824-00.

For best results, prepare the wires as shown:



		TE Connectivity 300 Constitutional Drive Menlo Park, CA 94025 USA	RAYCHEM	TITLE: SOLDERSLEEVE ONE-STEP WIRE TERMINATOR, LOW TEMPERATURE			
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: CWT-900X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: SEE TABLE	DOC. ISSUE: 10	DATE: 15-Apr-11	
PREPARED BY: m. foronda		REPLACES: D981199		DCR NUMBER: D030072	SCALE: None	SIZE: A	SHEET: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing category](#):

Click to view products by [TE Connectivity manufacturer](#):

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#) [620026-000](#) [B-004-00](#) [699055-000](#) [140945-000](#)