


- ① COORDINATE DIMENSION APPLIES FROM BASIC LOCATION.
- ② 10 AND 14 POSITION SIZES CONTAIN ONLY ONE SLOT FOR SNAP-IN POLARIZER (MILITARY POLARIZATION) LOCATED AS SHOWN.
- ③ 10 POSITION SIZES CONTAIN ONLY ONE SLOT FOR DUAL POLARIZATION, LOCATED AS SHOWN.
- 4. RECOMMENDED PRINTED CIRCUIT BOARD THICKNESS IS 3.18 [.125].
- ⑤ DISTANCE REQUIRED BY EJECTION LATCHES IN THE OPEN POSITION.
- ⑥ POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, 0.76μm[.000030] MIN TOTAL ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.  
-OR-  
0.76μm[.000030] MIN GOLD PLATE ON THE LOCALIZED PLATE AREA, 2.54μm[.000100] MIN TIN-LEAD PLATE ON THE SOLDER TAIL, 1.27μm[.000050] MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

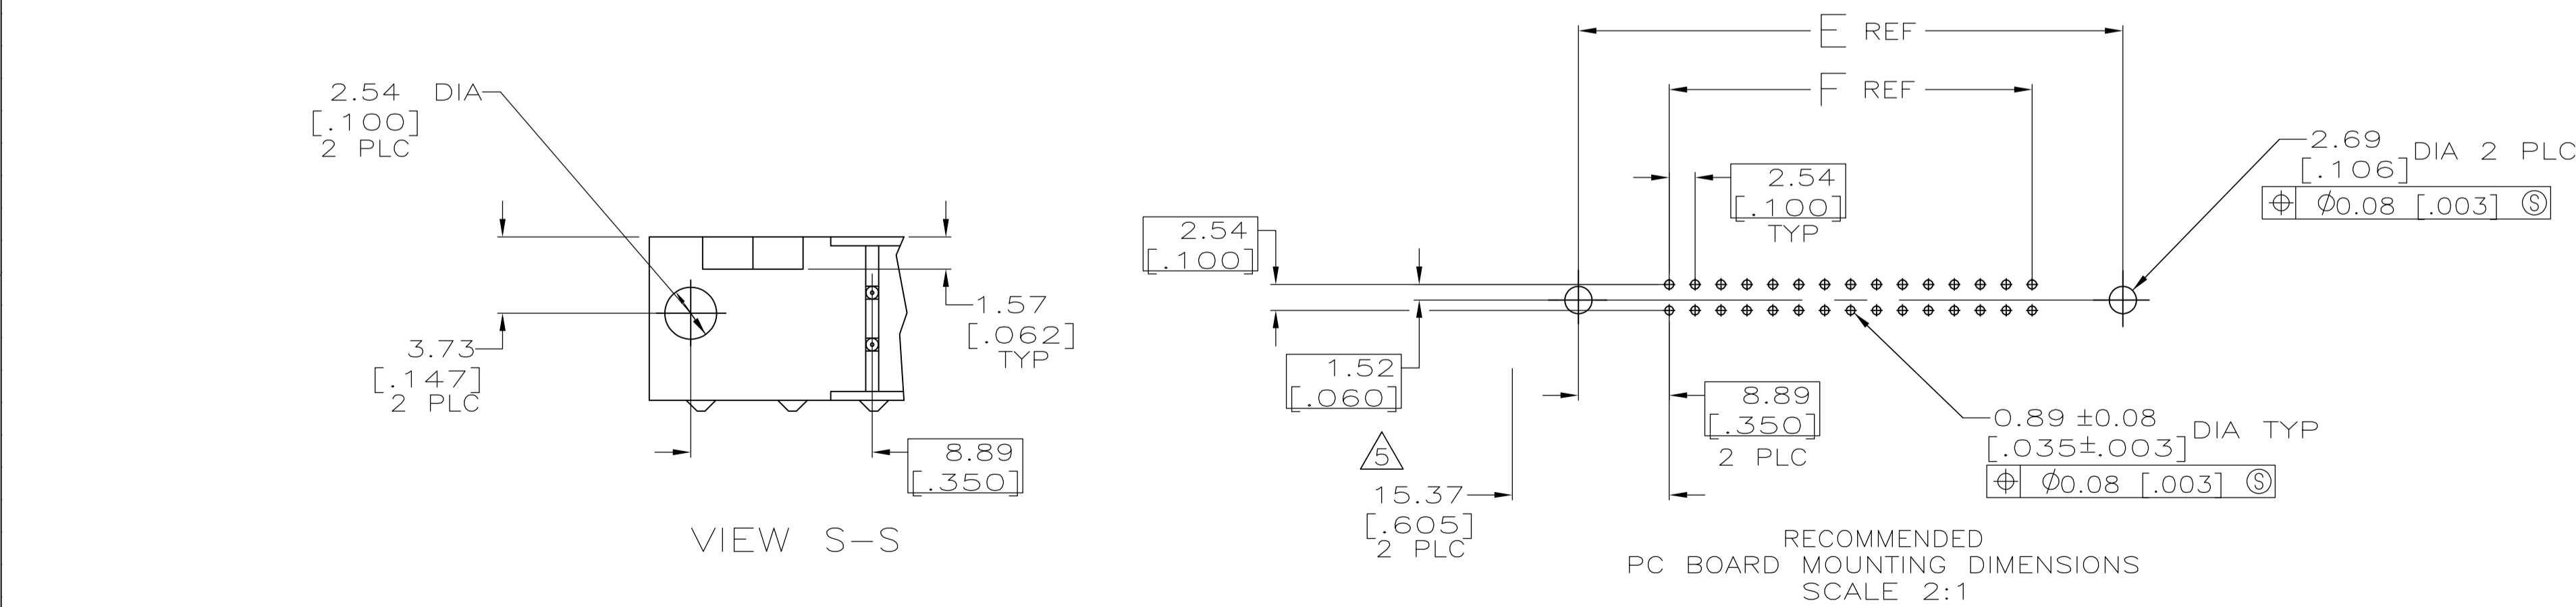

OBSOLETE	53.34	71.12	65.02	75.18	71.12	60.96	44	1-499374-3
OBSOLETE	78.74	96.52	90.42	100.58	96.52	86.36	64	1-499374-2
OBSOLETE	73.66	91.44	85.34	95.50	91.44	81.28	60	1-499374-1
	60.96	78.74	72.64	82.80	78.74	68.58	50	1-499374-0
	2.400	3.100	2.860	3.260	3.100	2.700	40	499374-9
	48.26	66.04	59.94	70.10	66.04	55.88	40	499374-9
	1.900	2.600	2.360	2.760	2.600	2.200	40	499374-9
	40.64	58.42	52.32	62.48	58.42	48.26	34	499374-8
OBSOLETE	35.56	53.34	47.24	57.40	53.34	43.18	30	499374-7
	1.400	2.100	1.860	2.260	2.100	1.700	30	499374-7
	30.48	48.26	42.16	52.32	48.26	38.10	26	499374-6
	1.200	1.900	1.660	2.060	1.900	1.500	26	499374-6
	27.94	45.72	39.62	49.78	45.72	35.56	24	499374-5
	1.100	1.800	1.560	1.960	1.800	1.400	24	499374-5
	22.86	40.64	34.54	44.70	40.64	30.48	20	499374-4
	.900	1.600	1.360	1.760	1.600	1.200	20	499374-4
OBSOLETE	17.78	35.56	29.46	39.62	35.56	25.40	16	499374-3
	1.700	2.400	2.160	2.560	2.400	1.900	16	499374-3
	15.24	33.02	26.92	37.08	33.02	22.86	14	499374-2
	.600	1.300	1.060	1.460	1.300	.900	14	499374-2
	10.16	27.94	21.84	32.00	27.94	17.78	10	499374-1
	.400	1.100	.860	1.260	1.100	.700	10	499374-1
	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H. MOLL 4-23-90	APVO S. GOOD 11-28-90	NAME	TYCO ELECTRONICS
0 PLC ± -	1 PLC ± -	2 PLC ± 0.13[.005]	3 PLC ± -	4 PLC ± -	ANGLES ± -
MATERIAL: HOUSING & LATCHES: GLASS FILLED NYLON OR POLYESTER, 94V-0 RATED. POSTS: PHOS BRONZE OR BRASS	FINISH: ⑥	SIZE: A1	CAGE CODE: 00779	DRAWING NO: 499374	RESTRICTED TO: -
CUSTOMER DRAWING			SCALE: 4:1	SHEET: 1 OF 1	REV: K

THIS DRAWING IS A CONTROLLED DOCUMENT. Tyco Electronics Corporation Harrisburg, PA 17105-3608

HEADER ASSY, UNIVERSAL, AMP-LATCH

108-40018

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [000-34000](#) [0009482033](#) [0009507031](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009508121](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [647662-1](#) [65039-019ELF](#) [65817-002LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67016-026LF](#) [67046-001LF](#) [67095-007LF](#) [68002-116](#) [68016-236H](#) [68648-049](#)