
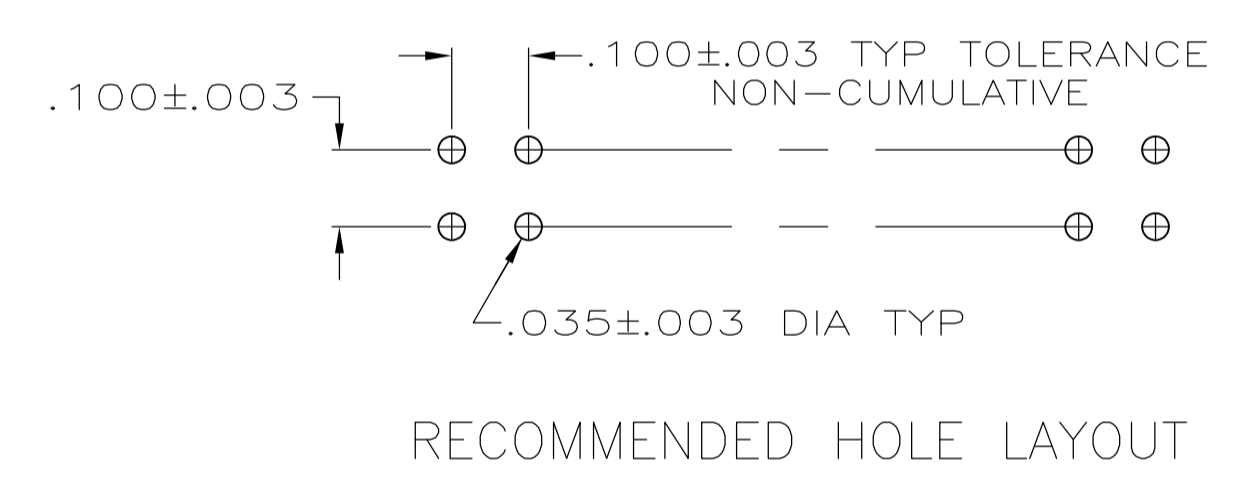


- ① THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- ④ BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- ⑤ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑥ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑦ MATERIAL:  
HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK  
POSTS- COPPER ALLOY
- ⑧ HIGH TEMPERATURE CONFIGURATION.
- ⑨ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

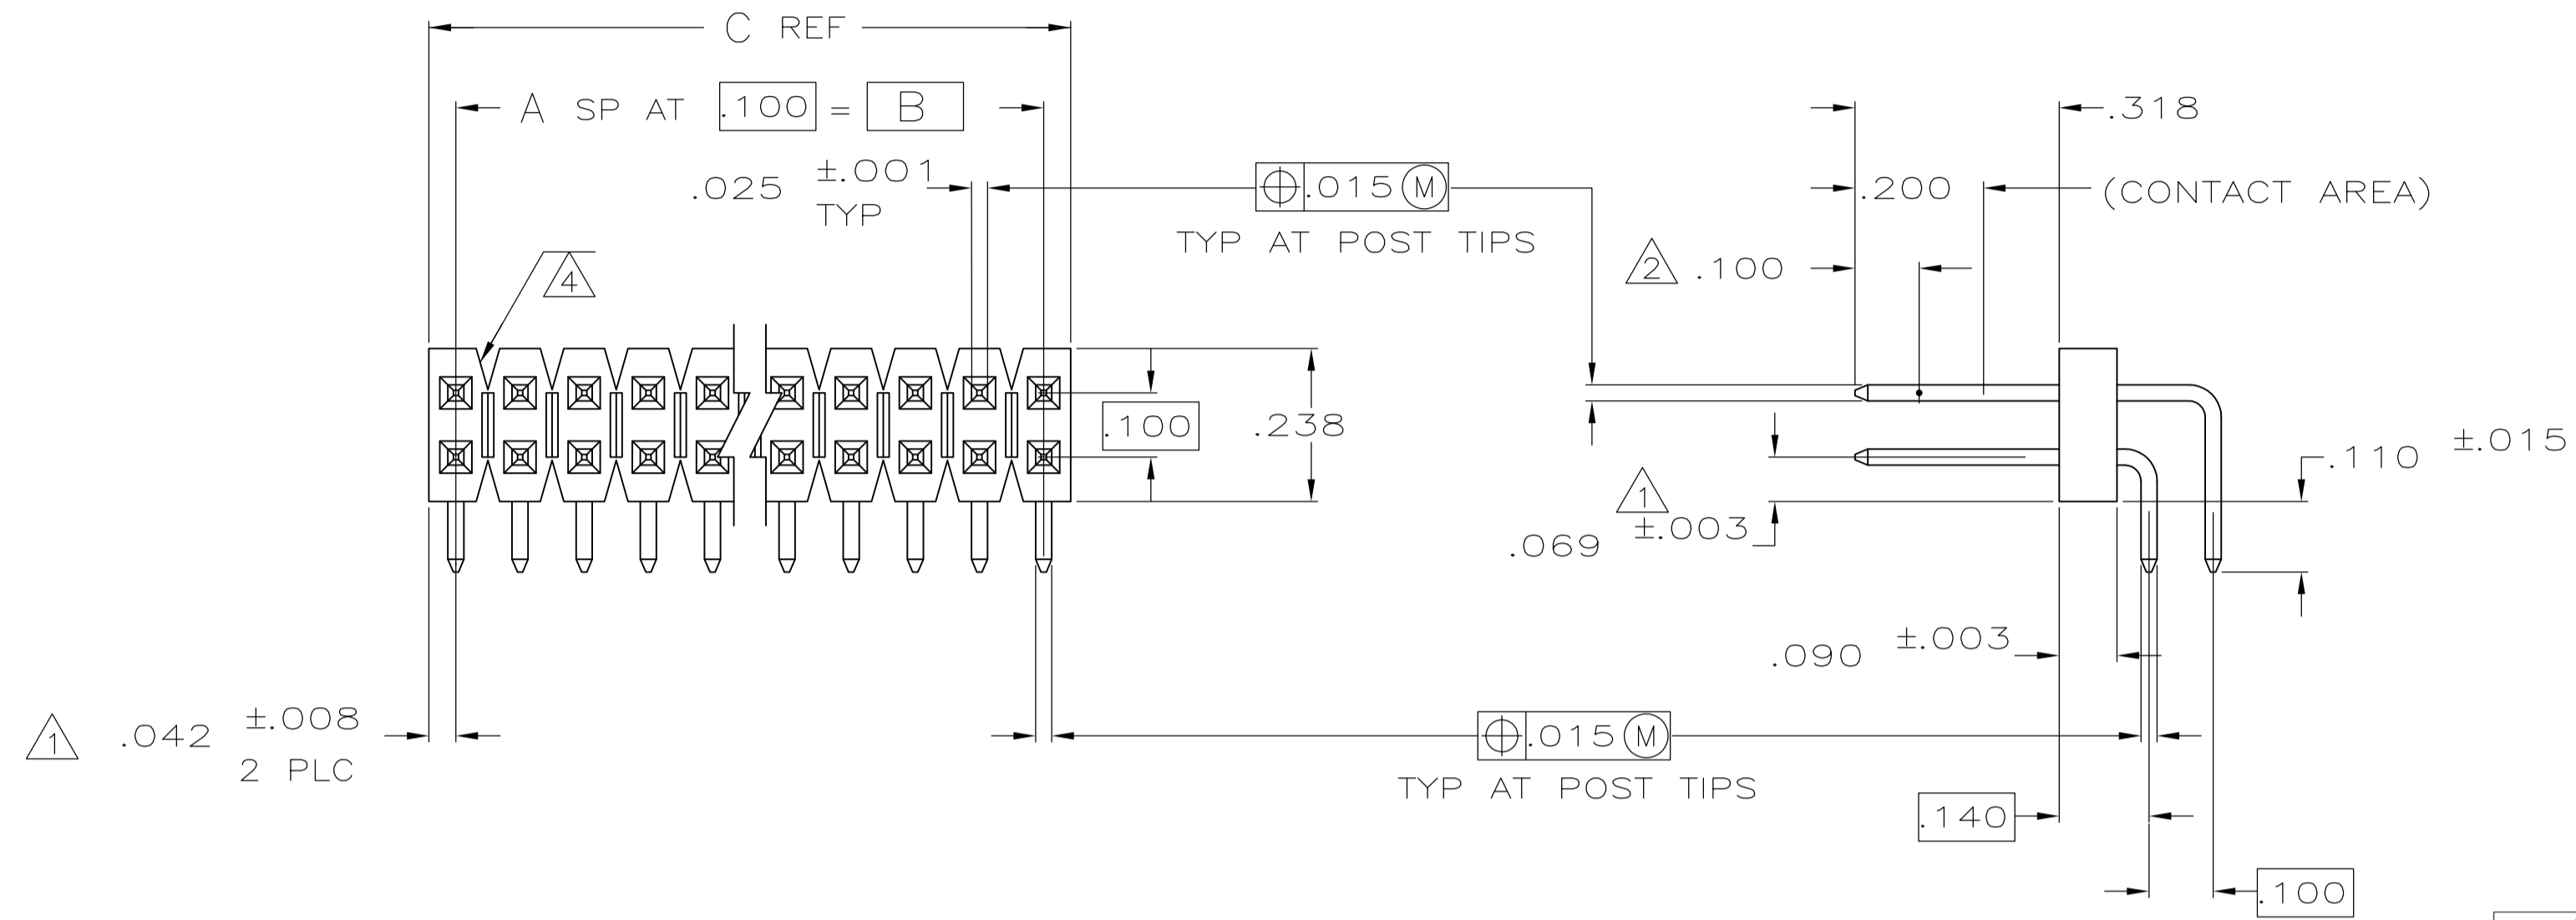

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
⑨		3.984	3.900	39	80	9-102975-0
⑧		3.884	3.800	38	78	8-102975-9
⑧		3.784	3.700	37	76	8-102975-8
⑧		3.684	3.600	36	74	8-102975-7
⑧		3.584	3.500	35	72	8-102975-6
⑧		3.484	3.400	34	70	8-102975-5
⑧		3.384	3.300	33	68	8-102975-4
⑧		3.284	3.200	32	66	8-102975-3
⑧		3.184	3.100	31	64	8-102975-2
⑧		3.084	3.000	30	62	8-102975-1
⑧		2.984	2.900	29	60	8-102975-0
⑧		2.884	2.800	28	58	7-102975-9
⑧		2.784	2.700	27	56	7-102975-8
⑧		2.684	2.600	26	54	7-102975-7
⑧		2.584	2.500	25	52	7-102975-6
⑧		2.484	2.400	24	50	7-102975-5
⑧		2.384	2.300	23	48	7-102975-4
⑧		2.284	2.200	22	46	7-102975-3
⑧		2.184	2.100	21	44	7-102975-2
⑧		2.084	2.000	20	42	7-102975-1
⑧		1.984	1.900	19	40	7-102975-0
⑧		1.884	1.800	18	38	6-102975-9
⑧		1.784	1.700	17	36	6-102975-8
⑧		1.684	1.600	16	34	6-102975-7
⑧		1.584	1.500	15	32	6-102975-6
⑧		1.484	1.400	14	30	6-102975-5
⑧		1.384	1.300	13	28	6-102975-4
⑧		1.284	1.200	12	26	6-102975-3
⑧		1.184	1.100	11	24	6-102975-2
⑧		1.084	1.000	10	22	6-102975-1
⑧		.984	.900	9	20	6-102975-0
⑧		.884	.800	8	18	5-102975-9
⑧		.784	.700	7	16	5-102975-8
⑧		.684	.600	6	14	5-102975-7
⑧		.584	.500	5	12	5-102975-6
⑧		.484	.400	4	10	5-102975-5
⑧		.384	.300	3	8	5-102975-4
⑧		.284	.200	2	6	5-102975-3
⑧		.184	.100	1	4	5-102975-2
⑧		.084	—	—	2	5-102975-1

—	⑤	3.984	3.900	39	80	4-102975-0
—	⑤	3.884	3.800	38	78	3-102975-9
—	⑤	3.784	3.700	37	76	3-102975-8
—	⑤	3.684	3.600	36	74	3-102975-7
—	⑤	3.584	3.500	35	72	3-102975-6
—	⑤	3.484	3.400	34	70	3-102975-5
—	⑤	3.384	3.300	33	68	3-102975-4
—	⑤	3.284	3.200	32	66	3-102975-3
—	⑤	3.184	3.100	31	64	3-102975-2
—	⑤	3.084	3.000	30	62	3-102975-1
—	⑤	2.984	2.900	29	60	3-102975-0
—	⑤	2.884	2.800	28	58	2-102975-9
—	⑤	2.784	2.700	27	56	2-102975-8
—	⑤	2.684	2.600	26	54	2-102975-7
—	⑤	2.584	2.500	25	52	2-102975-6
—	⑤	2.484	2.400	24	50	2-102975-5
⑨	⑤	2.384	2.300	23	48	2-102975-4
—	⑤	2.284	2.200	22	46	2-102975-3
—	⑤	2.184	2.100	21	44	2-102975-2
—	⑤	2.084	2.000	20	42	2-102975-1
—	⑤	1.984	1.900	19	40	2-102975-0
⑨	⑤	1.884	1.800	18	38	1-102975-9
—	⑤	1.784	1.700	17	36	1-102975-8
⑨	⑤	1.684	1.600	16	34	1-102975-7
—	⑤	1.584	1.500	15	32	1-102975-6
—	⑤	1.484	1.400	14	30	1-102975-5
—	⑤	1.384	1.300	13	28	1-102975-4
—	⑤	1.284	1.200	12	26	1-102975-3
⑨	⑤	1.184	1.100	11	24	1-102975-2
—	⑤	1.084	1.000	10	22	1-102975-1
—	⑤	.984	.900	9	20	1-102975-0
⑨	⑤	.884	.800	8	18	102975-9
—	⑤	.784	.700	7	16	102975-8
SUPERSEDED	⑤	.684	.600	6	14	102975-7
—	⑤	.584	.500	5	12	102975-6
—	⑤	.484	.400	4	10	102975-5
—	⑤	.384	.300	3	8	102975-4
SUPERSEDED	⑤	.284	.200	2	6	102975-3
—	⑤	.184	.100	1	4	102975-2
⑨	⑤	.084	—	—	2	102975-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN R BROWN 01FEB2006	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J GEFSEFORD 01FEB2006	NAME
2 PLC ± -	3 PLC ± .005	APVD J GEFSEFORD 01FEB2006	PRODUCT SPEC
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE
MATERIAL	FINISH SEE TABLE	WEIGHT	CAGE CODE DRAWING NO
			A1 00779 C=102975
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV G

HEADER ASSY, MOD II, BREAKAWAY, DOUBLE ROW, .100X.100 CL, RIGHT ANGLE WITH .025 SQ POSTS

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [79531-3000](#) [FCN-](#)  
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[801-93-011-10-001000](#)