


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00				
	K2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

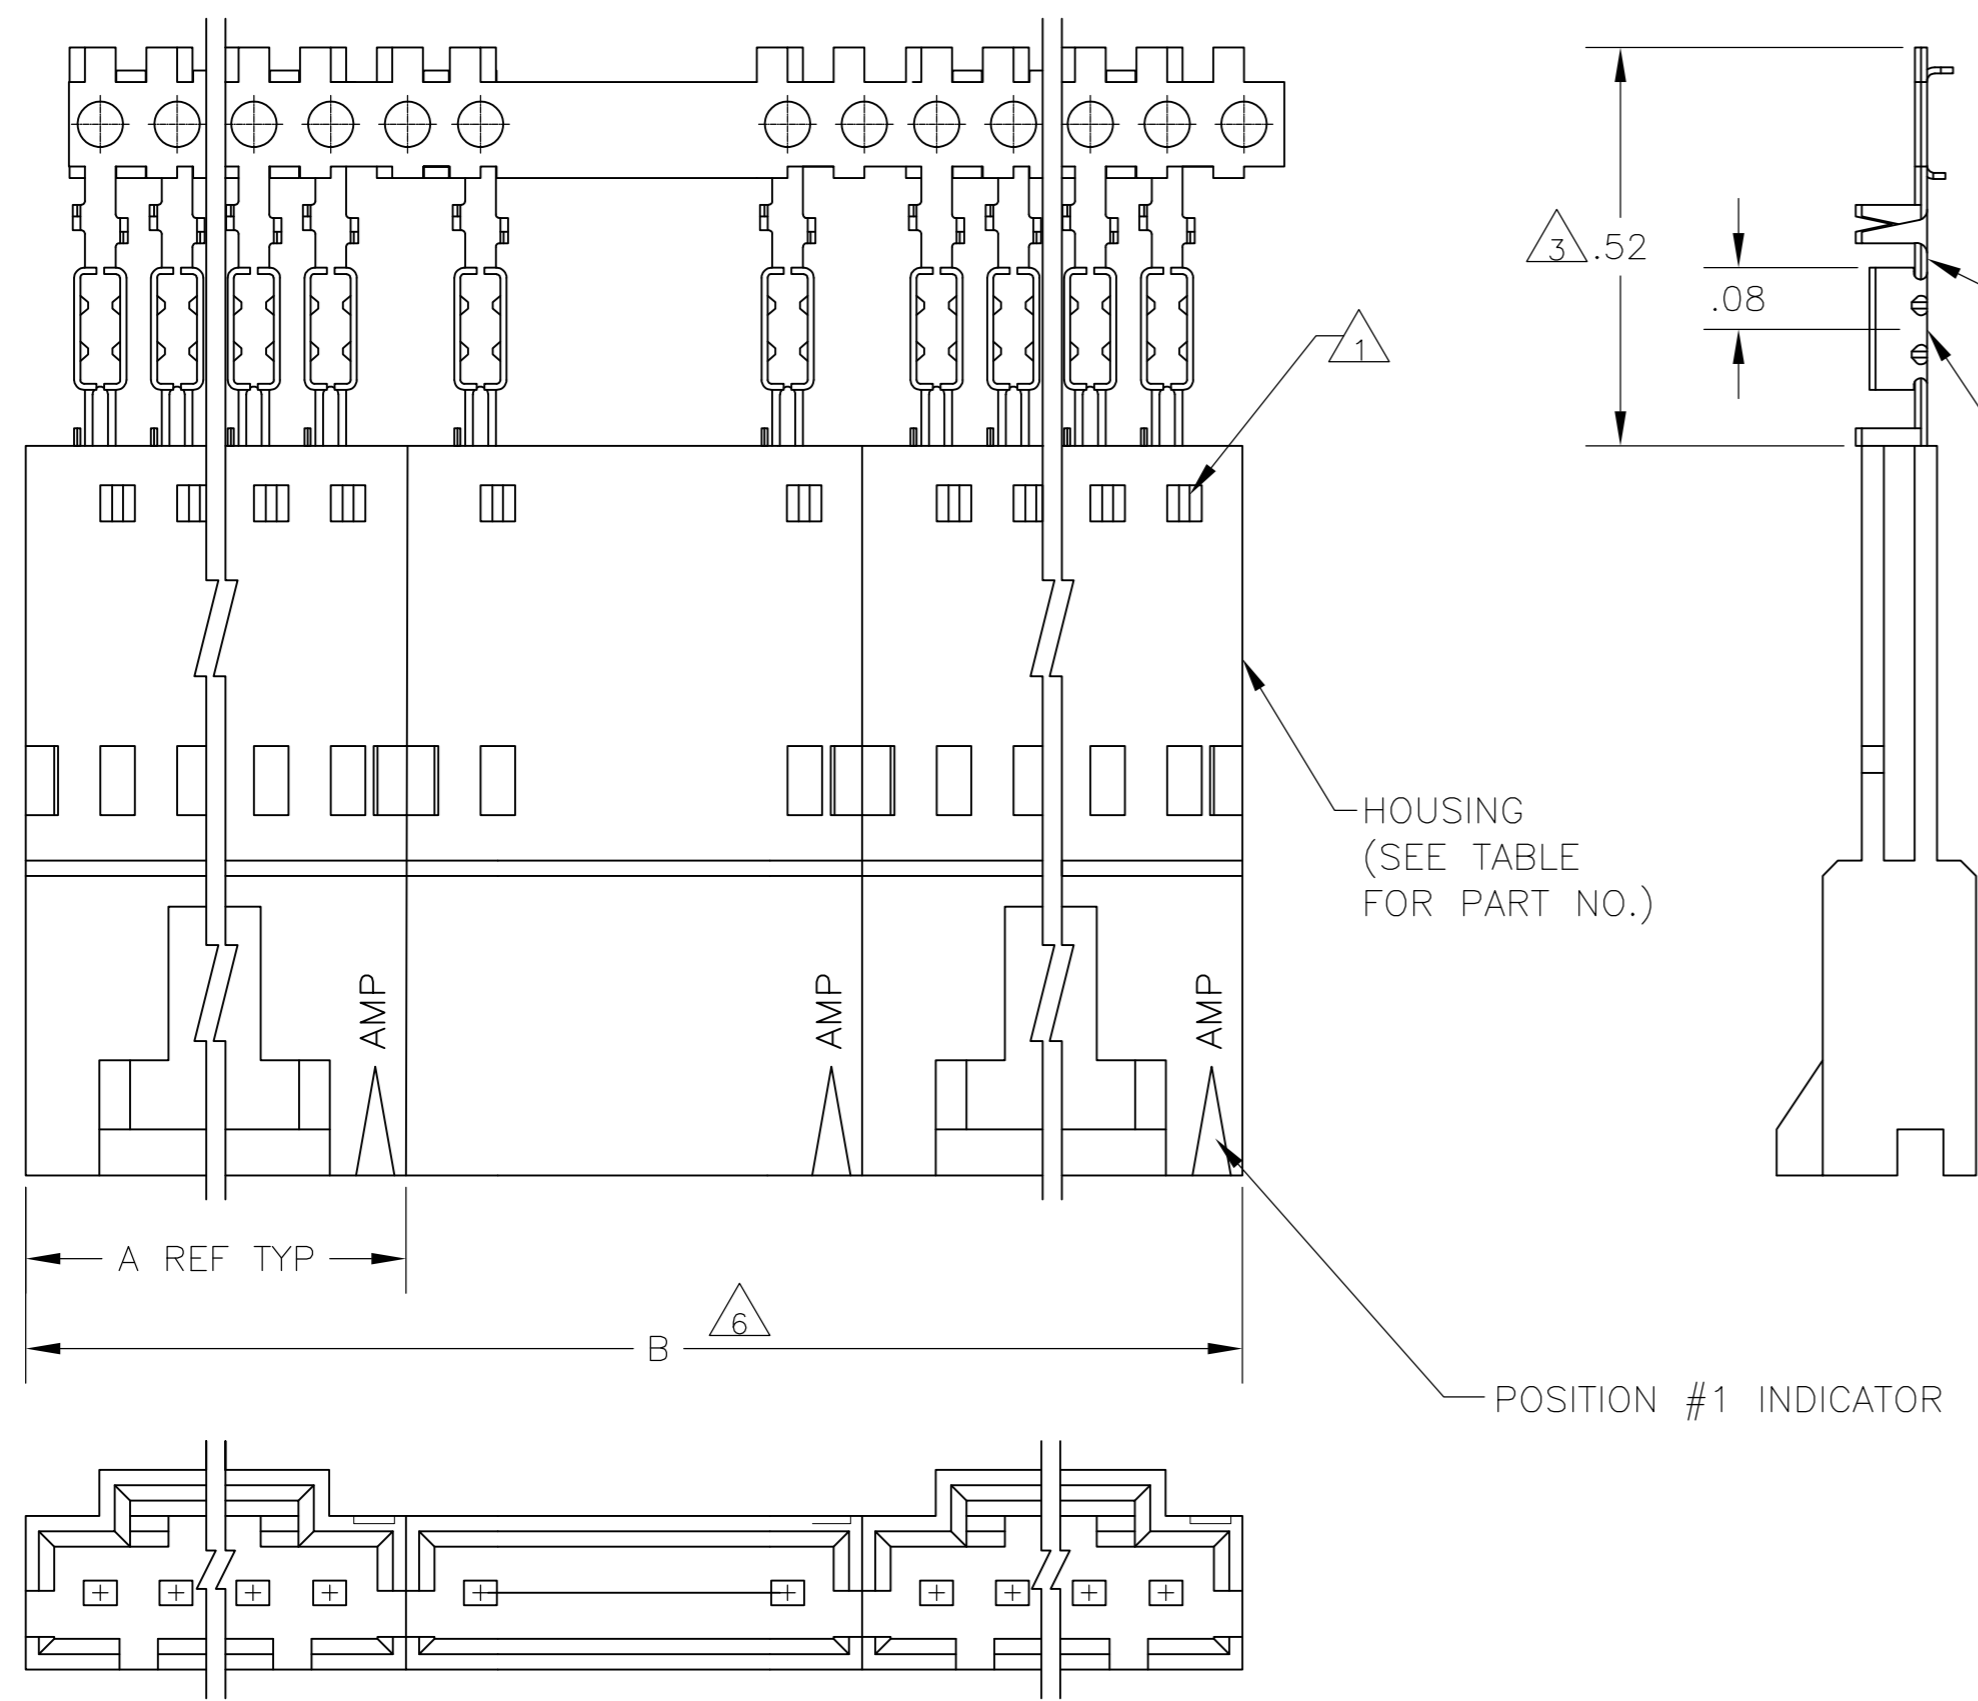

CONTACT IDENTIFICATION LETTER "D" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103661
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK  
PINS: PHOS. BRONZE
- 8 FINISH- PINS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- 9 FINISH- PINS: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- 10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 11 FINISH- PINS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12	OBSOLETE	11	2	2.59	1.295	1-103653-1	12	6-103944-1
12	OBSOLETE	11	2	2.39	1.195	1-103653-0	11	6-103944-0
		11	2	2.19	1.095	103653-9	10	5-103944-9
		11	2	1.99	.995	103653-8	9	5-103944-8
		11	2	1.79	.895	103653-7	8	5-103944-7
		11	3	2.39	.795	103653-6	7	5-103944-6
		11	2	1.39	.695	103653-5	6	5-103944-5
		11	4	2.38	.595	103653-4	5	5-103944-4
		11	4	1.98	.495	103653-3	4	5-103944-3
		11	5	1.98	.395	103653-2	3	5-103944-2
		11	8	2.36	.295	103653-1	2	5-103944-1
		10	3	2.39	.795	103653-6	7	1-103944-3
		10	4	1.98	.495	103653-3	4	1-103944-2
		8	2	2.59	1.295	1-103653-1	12	1-103944-1
12	OBSOLETE	8	2	2.39	1.195	1-103653-0	11	1-103944-0
		8	2	2.19	1.095	103653-9	10	103944-9
		8	2	1.99	.995	103653-8	9	103944-8
		8	2	1.79	.895	103653-7	8	103944-7
		8	3	2.39	.795	103653-6	7	103944-6
		8	2	1.39	.695	103653-5	6	103944-5
		8	4	2.38	.595	103653-4	5	103944-4
		8	4	1.98	.495	103653-3	4	103944-3
		8	5	1.98	.395	103653-2	3	103944-2
		8	8	2.36	.295	103653-1	2	103944-1
PLATING		6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.BROWN 26JUL00  
 CHK K.WRIGHT 26JUL00  
 APVD K.WRIGHT 26JUL00

TE Connectivity

NAME SHROUDED PIN ASSY, AMPMDO MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM

PRODUCT SPEC 108-25034  
 APPLICATION SPEC 114-25026

SIZE A2 CAGE CODE 00779 DRAWING NO C=103944 RESTRICTED TO -

MATERIAL 7 FINISH SEE TABLE WEIGHT -

CUSTOMER DRAWING SCALE 4:1 SHEET 1 of 1 REV K2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)