


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00				
	K2	REVISED PER ECO-11-004820	11MAR11	RK	HMR

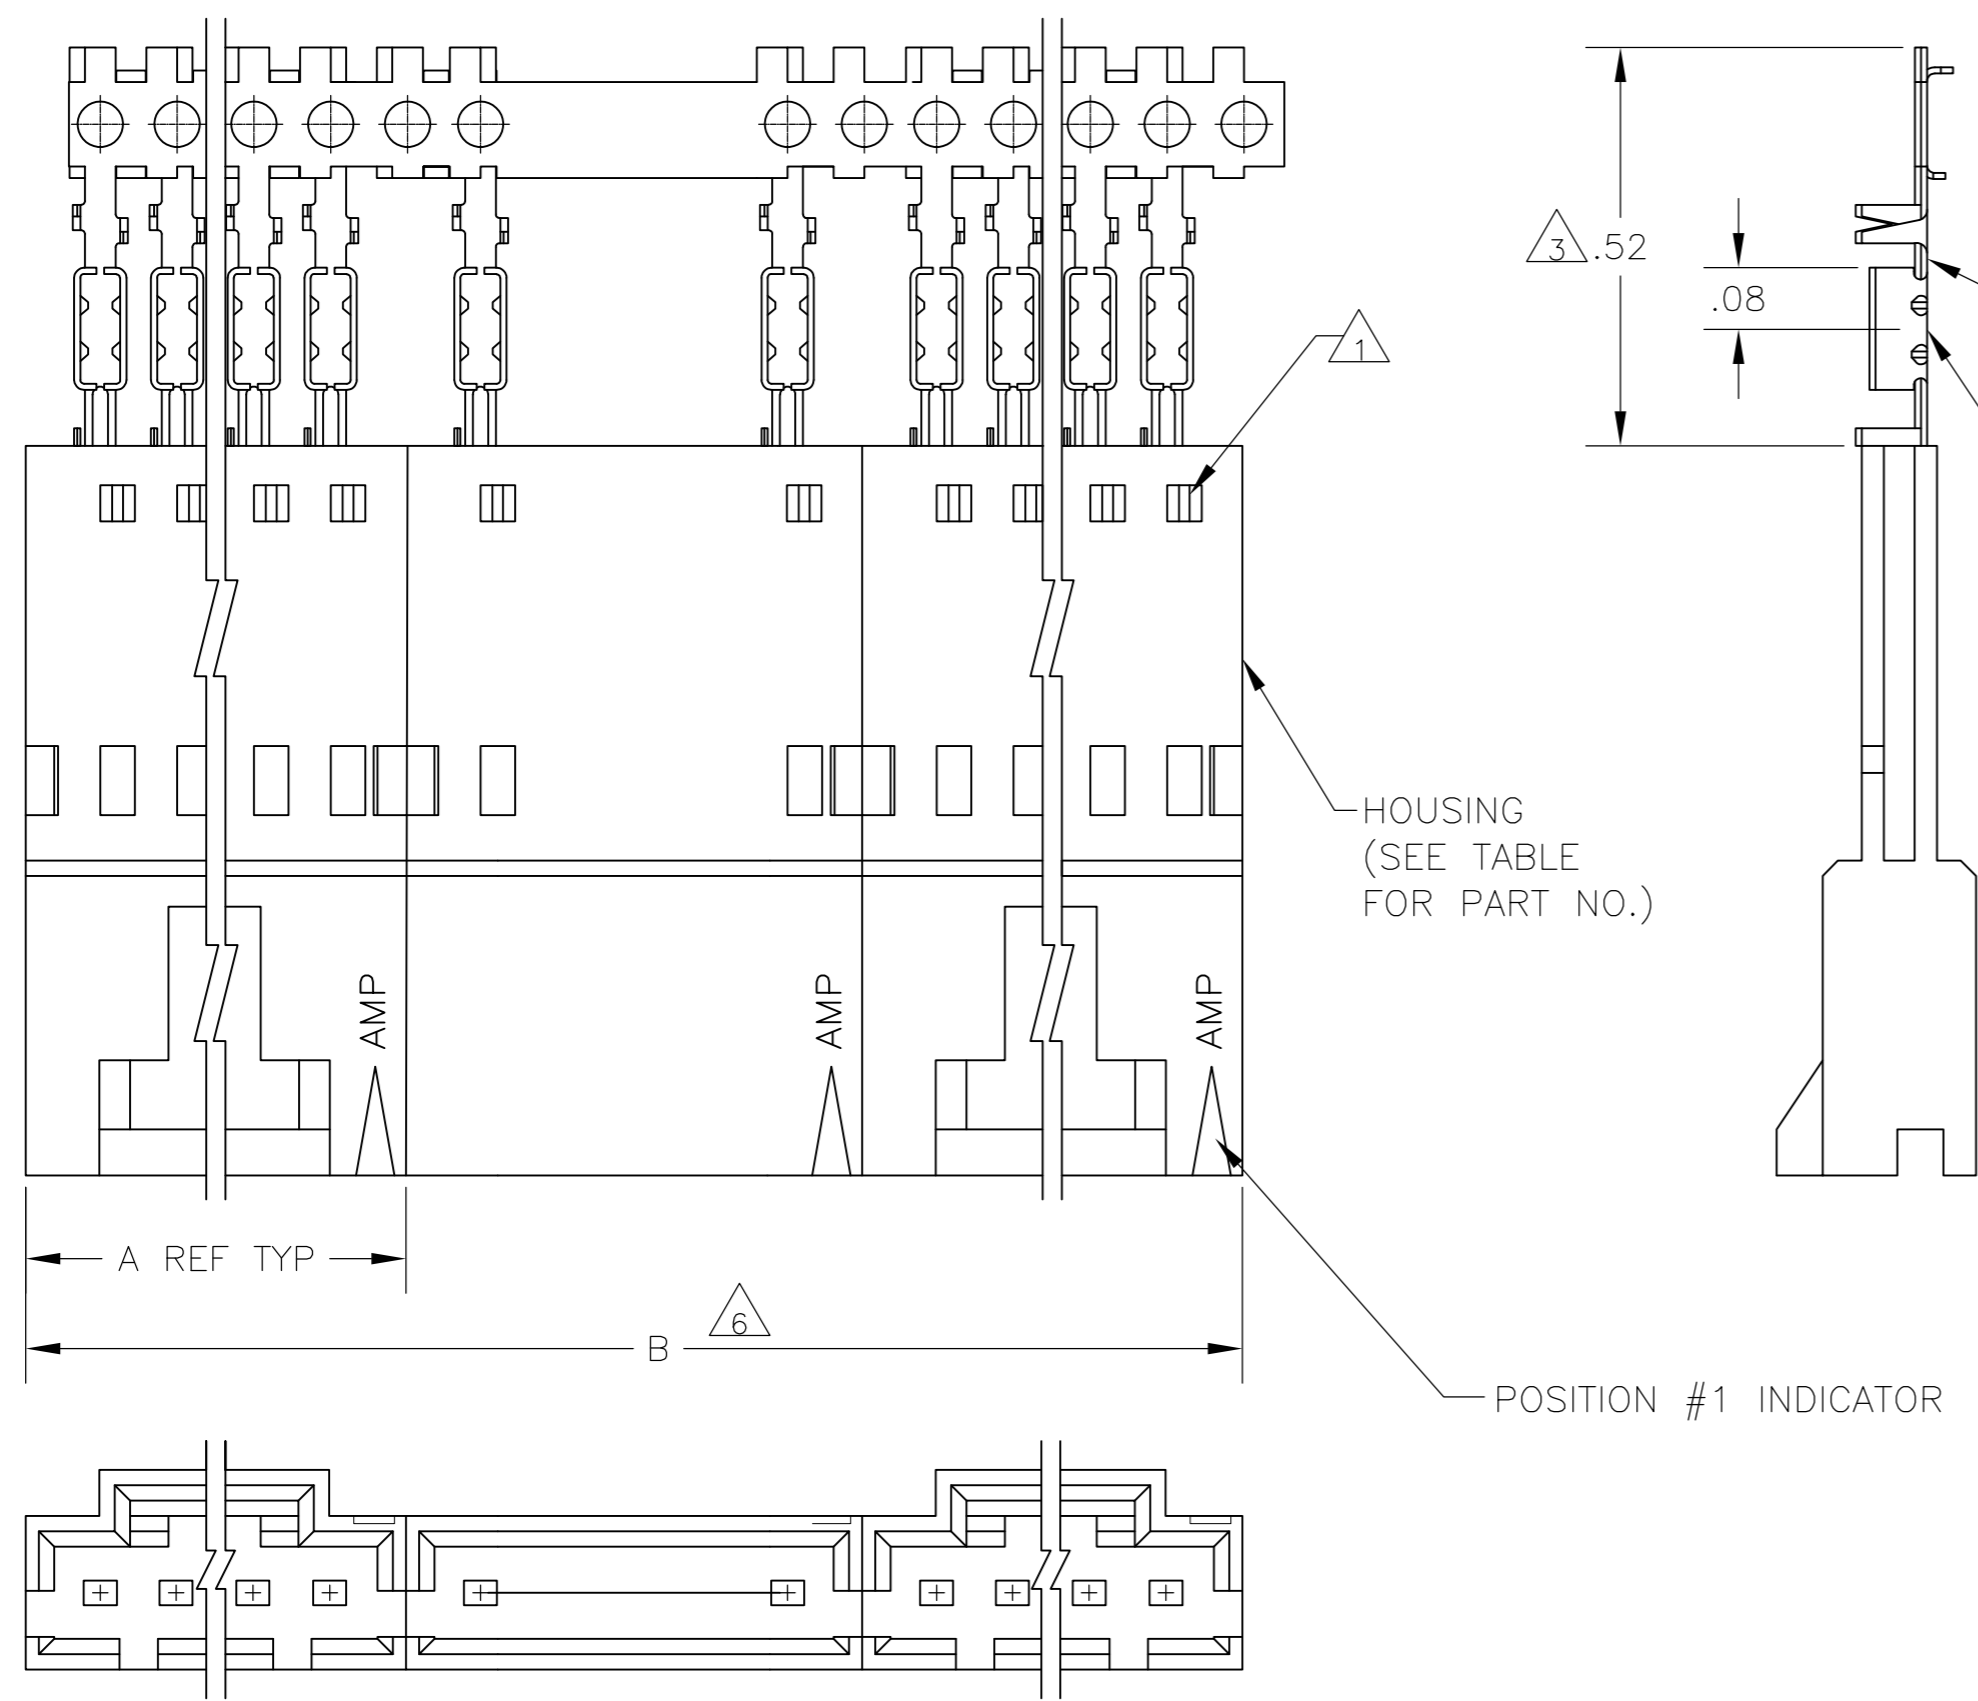

PLATING	△6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	
△12 OBSOLETE	△11	2	2.59	1.295	1-103653-1	12	6-103944-1
△12 OBSOLETE	△11	2	2.39	1.195	1-103653-0	11	6-103944-0
	△11	2	2.19	1.095	103653-9	10	5-103944-9
	△11	2	1.99	.995	103653-8	9	5-103944-8
	△11	2	1.79	.895	103653-7	8	5-103944-7
	△11	3	2.39	.795	103653-6	7	5-103944-6
	△11	2	1.39	.695	103653-5	6	5-103944-5
	△11	4	2.38	.595	103653-4	5	5-103944-4
	△11	4	1.98	.495	103653-3	4	5-103944-3
	△11	5	1.98	.395	103653-2	3	5-103944-2
	△11	8	2.36	.295	103653-1	2	5-103944-1
	△10	3	2.39	.795	103653-6	7	1-103944-3
	△10	4	1.98	.495	103653-3	4	1-103944-2
	△8	2	2.59	1.295	1-103653-1	12	1-103944-1
△12 OBSOLETE	△8	2	2.39	1.195	1-103653-0	11	1-103944-0
	△8	2	2.19	1.095	103653-9	10	103944-9
	△8	2	1.99	.995	103653-8	9	103944-8
	△8	2	1.79	.895	103653-7	8	103944-7
	△8	3	2.39	.795	103653-6	7	103944-6
	△8	2	1.39	.695	103653-5	6	103944-5
	△8	4	2.38	.595	103653-4	5	103944-4
	△8	4	1.98	.495	103653-3	4	103944-3
	△8	5	1.98	.395	103653-2	3	103944-2
	△8	8	2.36	.295	103653-1	2	103944-1

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #22-#26 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103661
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
PINS: PHOS. BRONZE
- △8 FINISH- PINS: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
- △9 FINISH- PINS: .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
- △10 PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- △11 FINISH- PINS: .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- △12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN R.BROWN 26JUL00		TE Connectivity	
CHK K.WRIGHT 26JUL00		NAME	
APVD K.WRIGHT 26JUL00		SHROUDED PIN ASSY, AMPMDO MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR NO 22-NO 26 AWG WIRE SIZE, STRIP FORM	
PRODUCT SPEC 108-25034		SIZE A2	CAGE CODE 00779
APPLICATION SPEC 114-25026	WEIGHT -	RESTRICTED TO -	
MATERIAL △7	FINISH SEE TABLE	CUSTOMER DRAWING	SCALE 4:1 SHEET 1 of 1 REV K2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)