


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K2		REVISED PER ECO-11-005027	11MAR11	RK	HMR

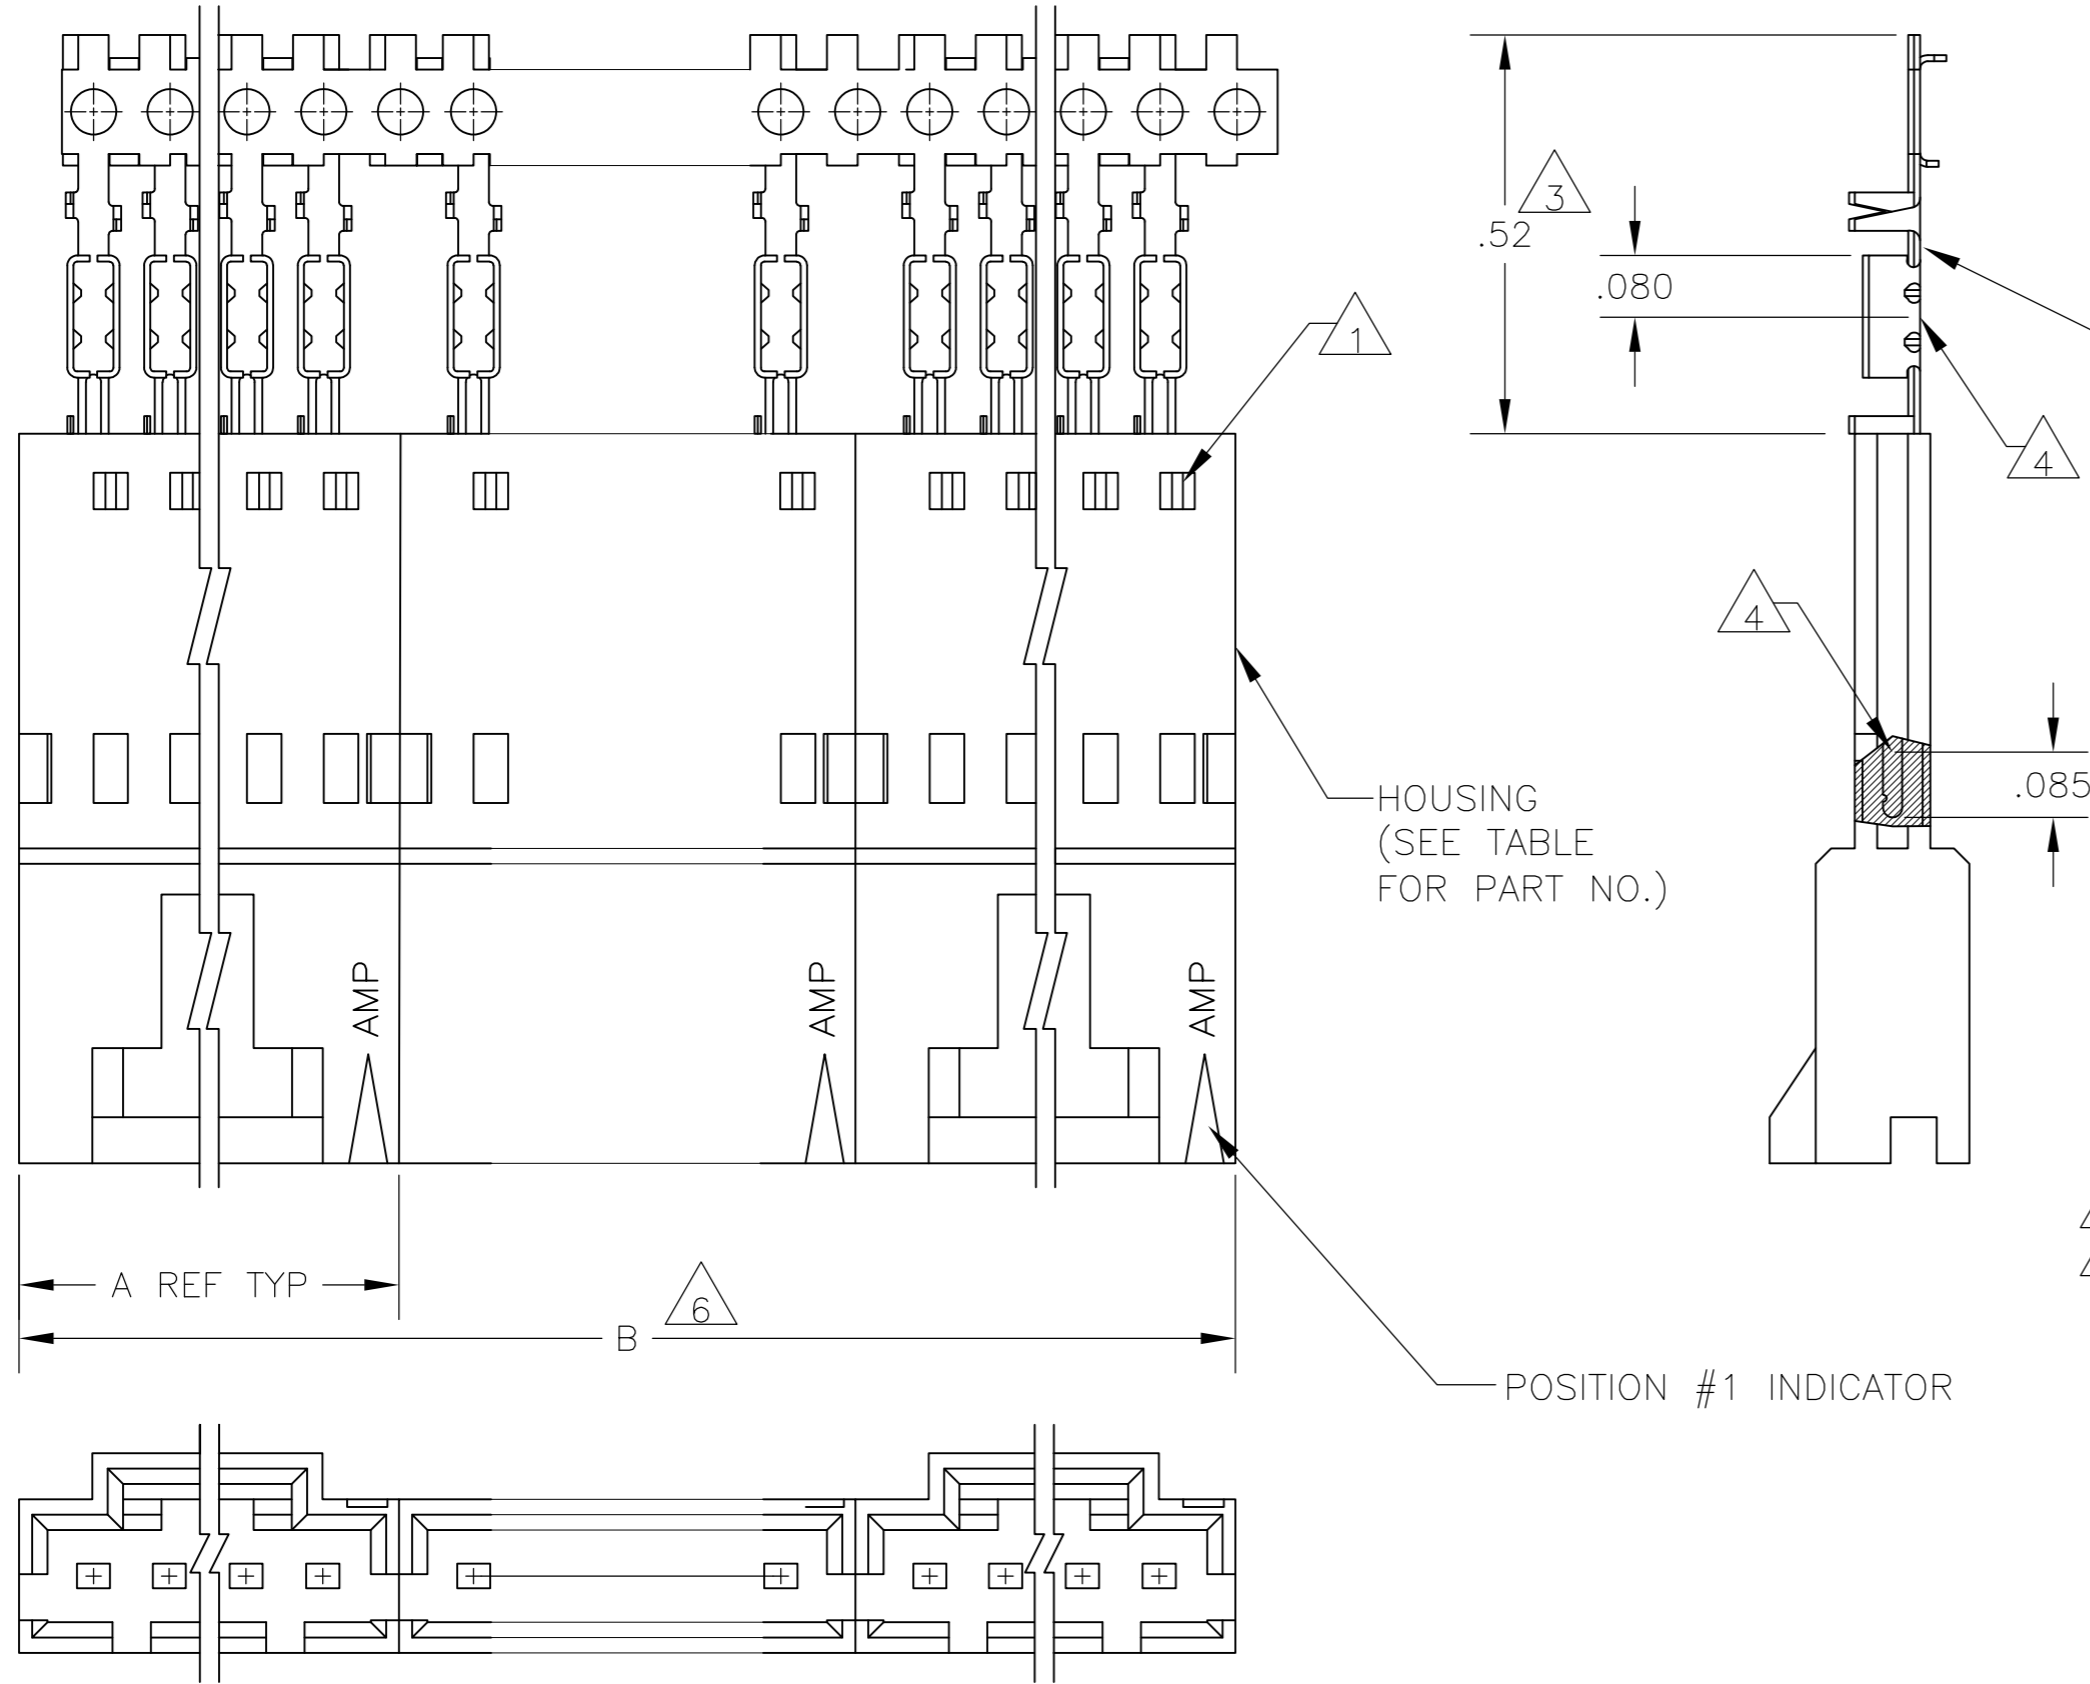

CONTACT IDENTIFICATION LETTER "C" (LOCATED IN THIS AREA)

HOUSING (SEE TABLE FOR PART NO.)

POSITION #1 INDICATOR

△9	OBSOLETE	△9	2	2.59	1.295	1-103653-1	12	6-103949-1
△10	OBSOLETE	△9	2	2.39	1.195	1-103653-0	11	6-103949-0
		△9	2	2.19	1.095	103653-9	10	5-103949-9
		△9	2	1.99	.995	103653-8	9	5-103949-8
		△9	2	1.79	.895	103653-7	8	5-103949-7
		△9	3	2.39	.795	103653-6	7	5-103949-6
		△9	2	1.39	.695	103653-5	6	5-103949-5
		△9	4	2.38	.595	103653-4	5	5-103949-4
		△9	4	1.98	.495	103653-3	4	5-103949-3
		△9	5	1.98	.395	103653-2	3	5-103949-2
		△9	8	2.36	.295	103653-1	2	5-103949-1
△10	OBSOLETE	△8	2	2.59	1.295	1-103653-1	12	1-103949-1
△10	OBSOLETE	△8	2	2.39	1.195	1-103653-0	11	1-103949-0
		△8	2	2.19	1.095	103653-9	10	103949-9
		△8	2	1.99	.995	103653-8	9	103949-8
△10	SUPERSEDED BY 5-103949-7	△8	2	1.79	.895	103653-7	8	103949-7
		△8	3	2.39	.795	103653-6	7	103949-6
		△8	2	1.39	.695	103653-5	6	103949-5
		△8	4	2.38	.595	103653-4	5	103949-4
		△8	4	1.98	.495	103653-3	4	103949-3
		△8	5	1.98	.395	103653-2	3	103949-2
		△8	8	2.36	.295	103653-1	2	103949-1
		△6		B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

- △1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- △2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- △3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- △4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5. FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103894
- △6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- △7 MATERIAL- HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK  
PINS: PHOS. BRONZE
- △8 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △9 FINISH- PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, OVER .000050 NICKEL.
- △10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	R BROWN	26JUL00
CHK	K WRIGHT	26JUL00
APVD	K WRIGHT	26JUL00
PRODUCT SPEC	108-25034	
APPLICATION SPEC	114-25026	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

SHROUDED PIN ASSY, AMPMOW MTE, SINGLE ROW, .100 CL, POLARIZED, W/ LATCH WINDOWS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103949 RESTRICTED TO: -

SCALE: 4:1 SHEET: 1 of 1 REV: K2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)