
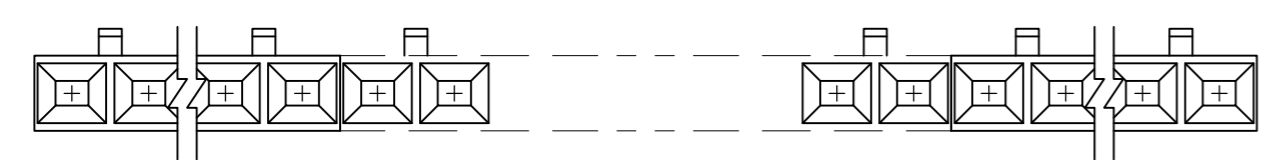


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
J		EC 0G3C 0771 04	29DEC04	BSV	JLG
J1		REVISED PER ECO-09-020689	01SEP09	KK	AEG

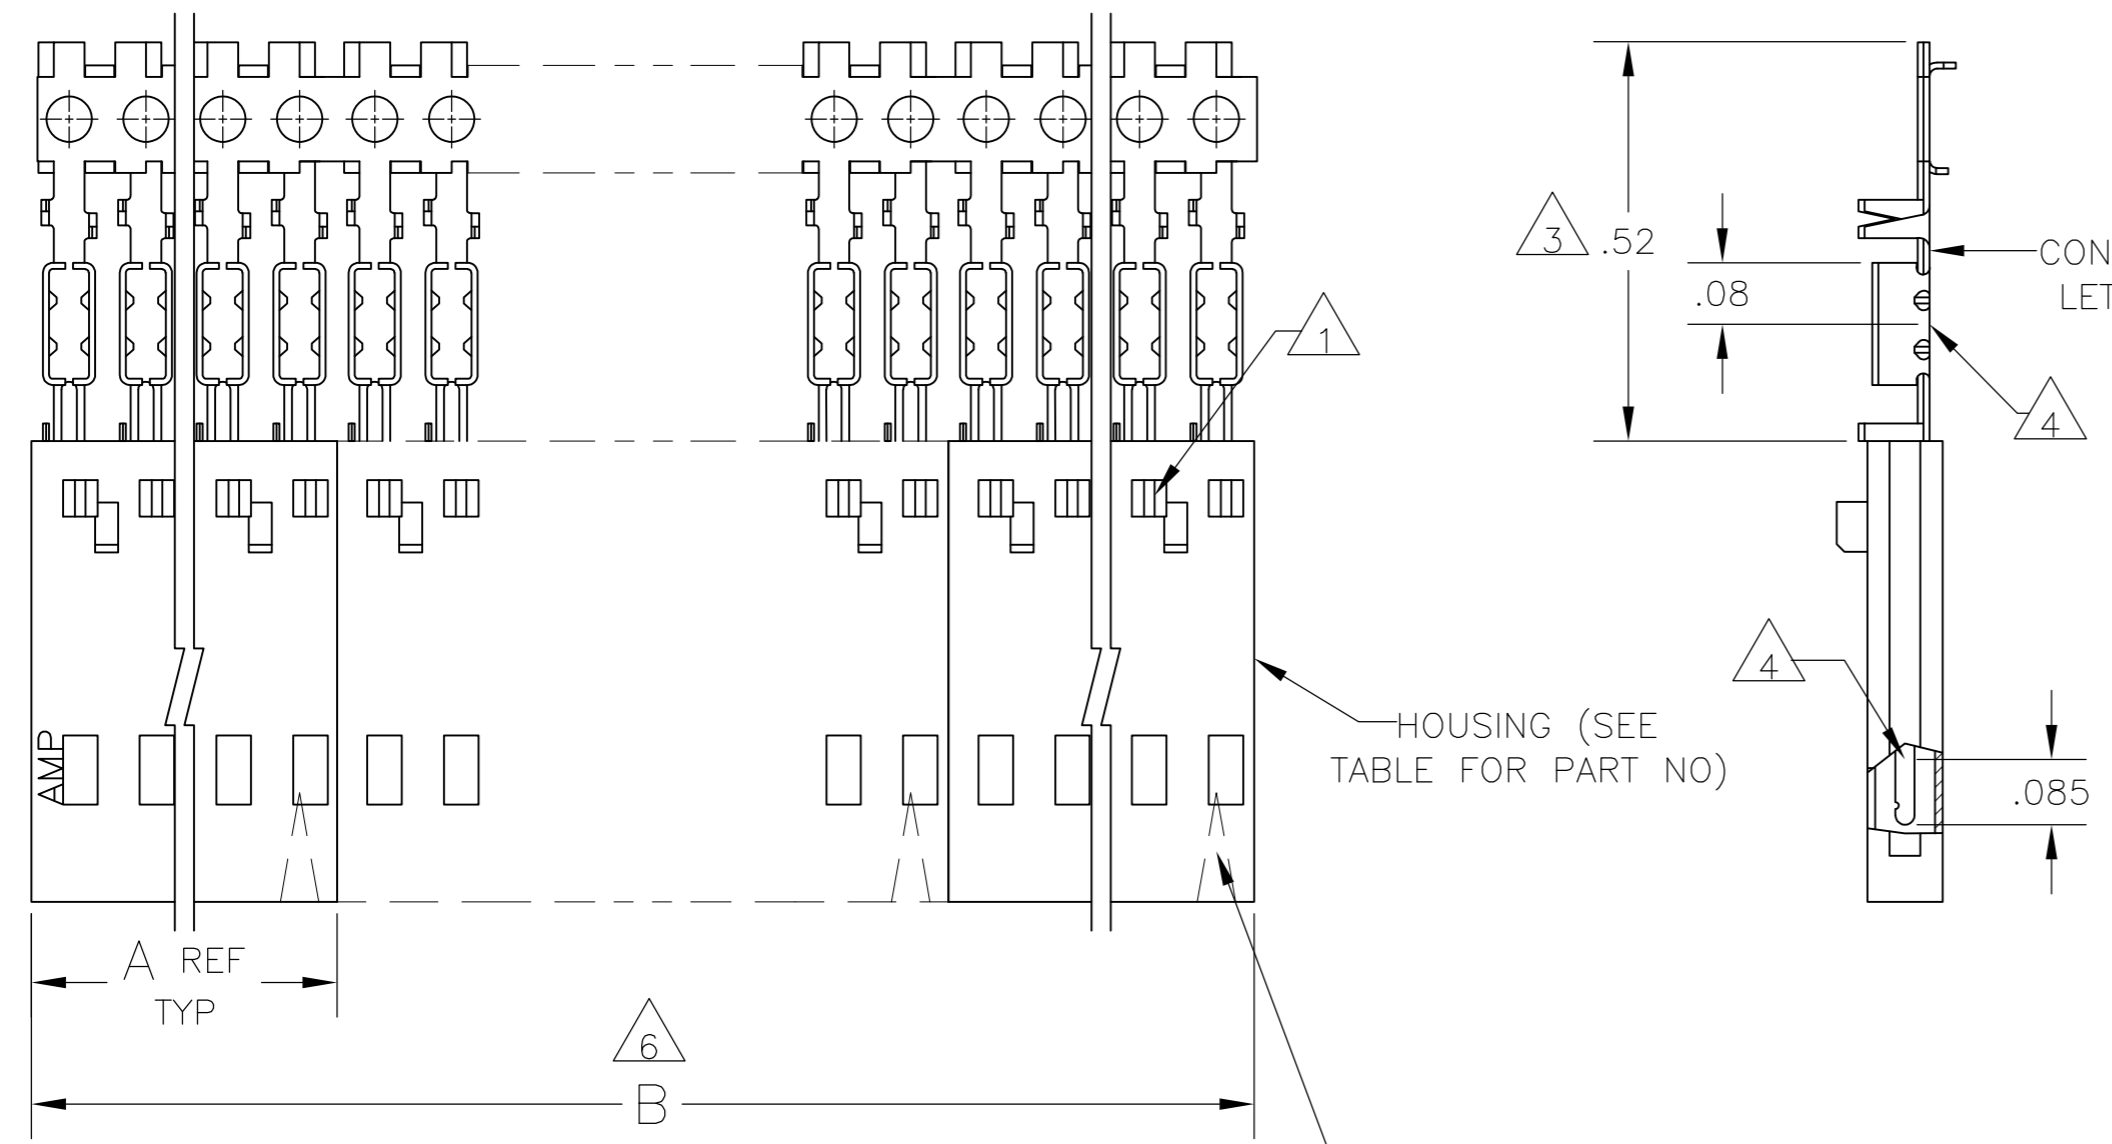

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103896
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD TERMINATION AREA, ALL OVER .000050 NICKEL.
- 8 PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN TERMINATION AREA, ALL OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

9	OBSOLETE	8	2	2.40	1.198	1-104503-1	12	6-103955-1
9	OBSOLETE	8	2	2.20	1.098	1-104503-0	11	6-103955-0
9	OBSOLETE	8	2	2.00	.998	104503-9	10	5-103955-9
9	OBSOLETE	8	2	1.80	.898	104503-8	9	5-103955-8
9	OBSOLETE	8	2	1.60	.798	104503-7	8	5-103955-7
9	OBSOLETE	8	2	1.40	.698	104503-6	7	5-103955-6
9	OBSOLETE	8	4	2.39	.598	104503-5	6	5-103955-5
		8	4	1.99	.498	104503-4	5	5-103955-4
		8	5	1.99	.398	104503-3	4	5-103955-3
		8	5	1.49	.298	104503-2	3	5-103955-2
		8	10	1.98	.198	104503-1	2	5-103955-1
9	OBSOLETE	7	2	2.40	1.198	1-104503-1	12	1-103955-1
9	OBSOLETE	7	2	2.20	1.098	1-104503-0	11	1-103955-0
9	OBSOLETE	7	2	2.00	.998	104503-9	10	103955-9
9	OBSOLETE	7	2	1.80	.898	104503-8	9	103955-8
9	OBSOLETE	7	2	1.60	.798	104503-7	8	103955-7
9	OBSOLETE	7	2	1.40	.698	104503-6	7	103955-6
9	OBSOLETE	7	4	2.39	.598	104503-5	6	103955-5
9	SUPERSEDED	7	4	1.99	.498	104503-4	5	103955-4
9	SUPERSEDED	7	5	1.99	.398	104503-3	4	103955-3
9	SUPERSEDED	7	5	1.49	.298	104503-2	3	103955-2
		7	10	1.98	.198	104503-1	2	103955-1
	PLATING	6	B	A		HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 11-5-86  
 CHK P.C.deYONG 11-12-86  
 APVD P.C.deYONG 11-12-86

Tyco Electronics Corporation  
 Harrisburg, Pa 17105-3608

NAME: PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

PRODUCT SPEC: 108-25034  
 APPLICATION SPEC: 114-25026

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103955 RESTRICTED TO: -

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC. COLOR: BLACK. PINS: PHOS. BRONZE. FINISH: SEE TABLE

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1 OF 1 REV: J1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)