
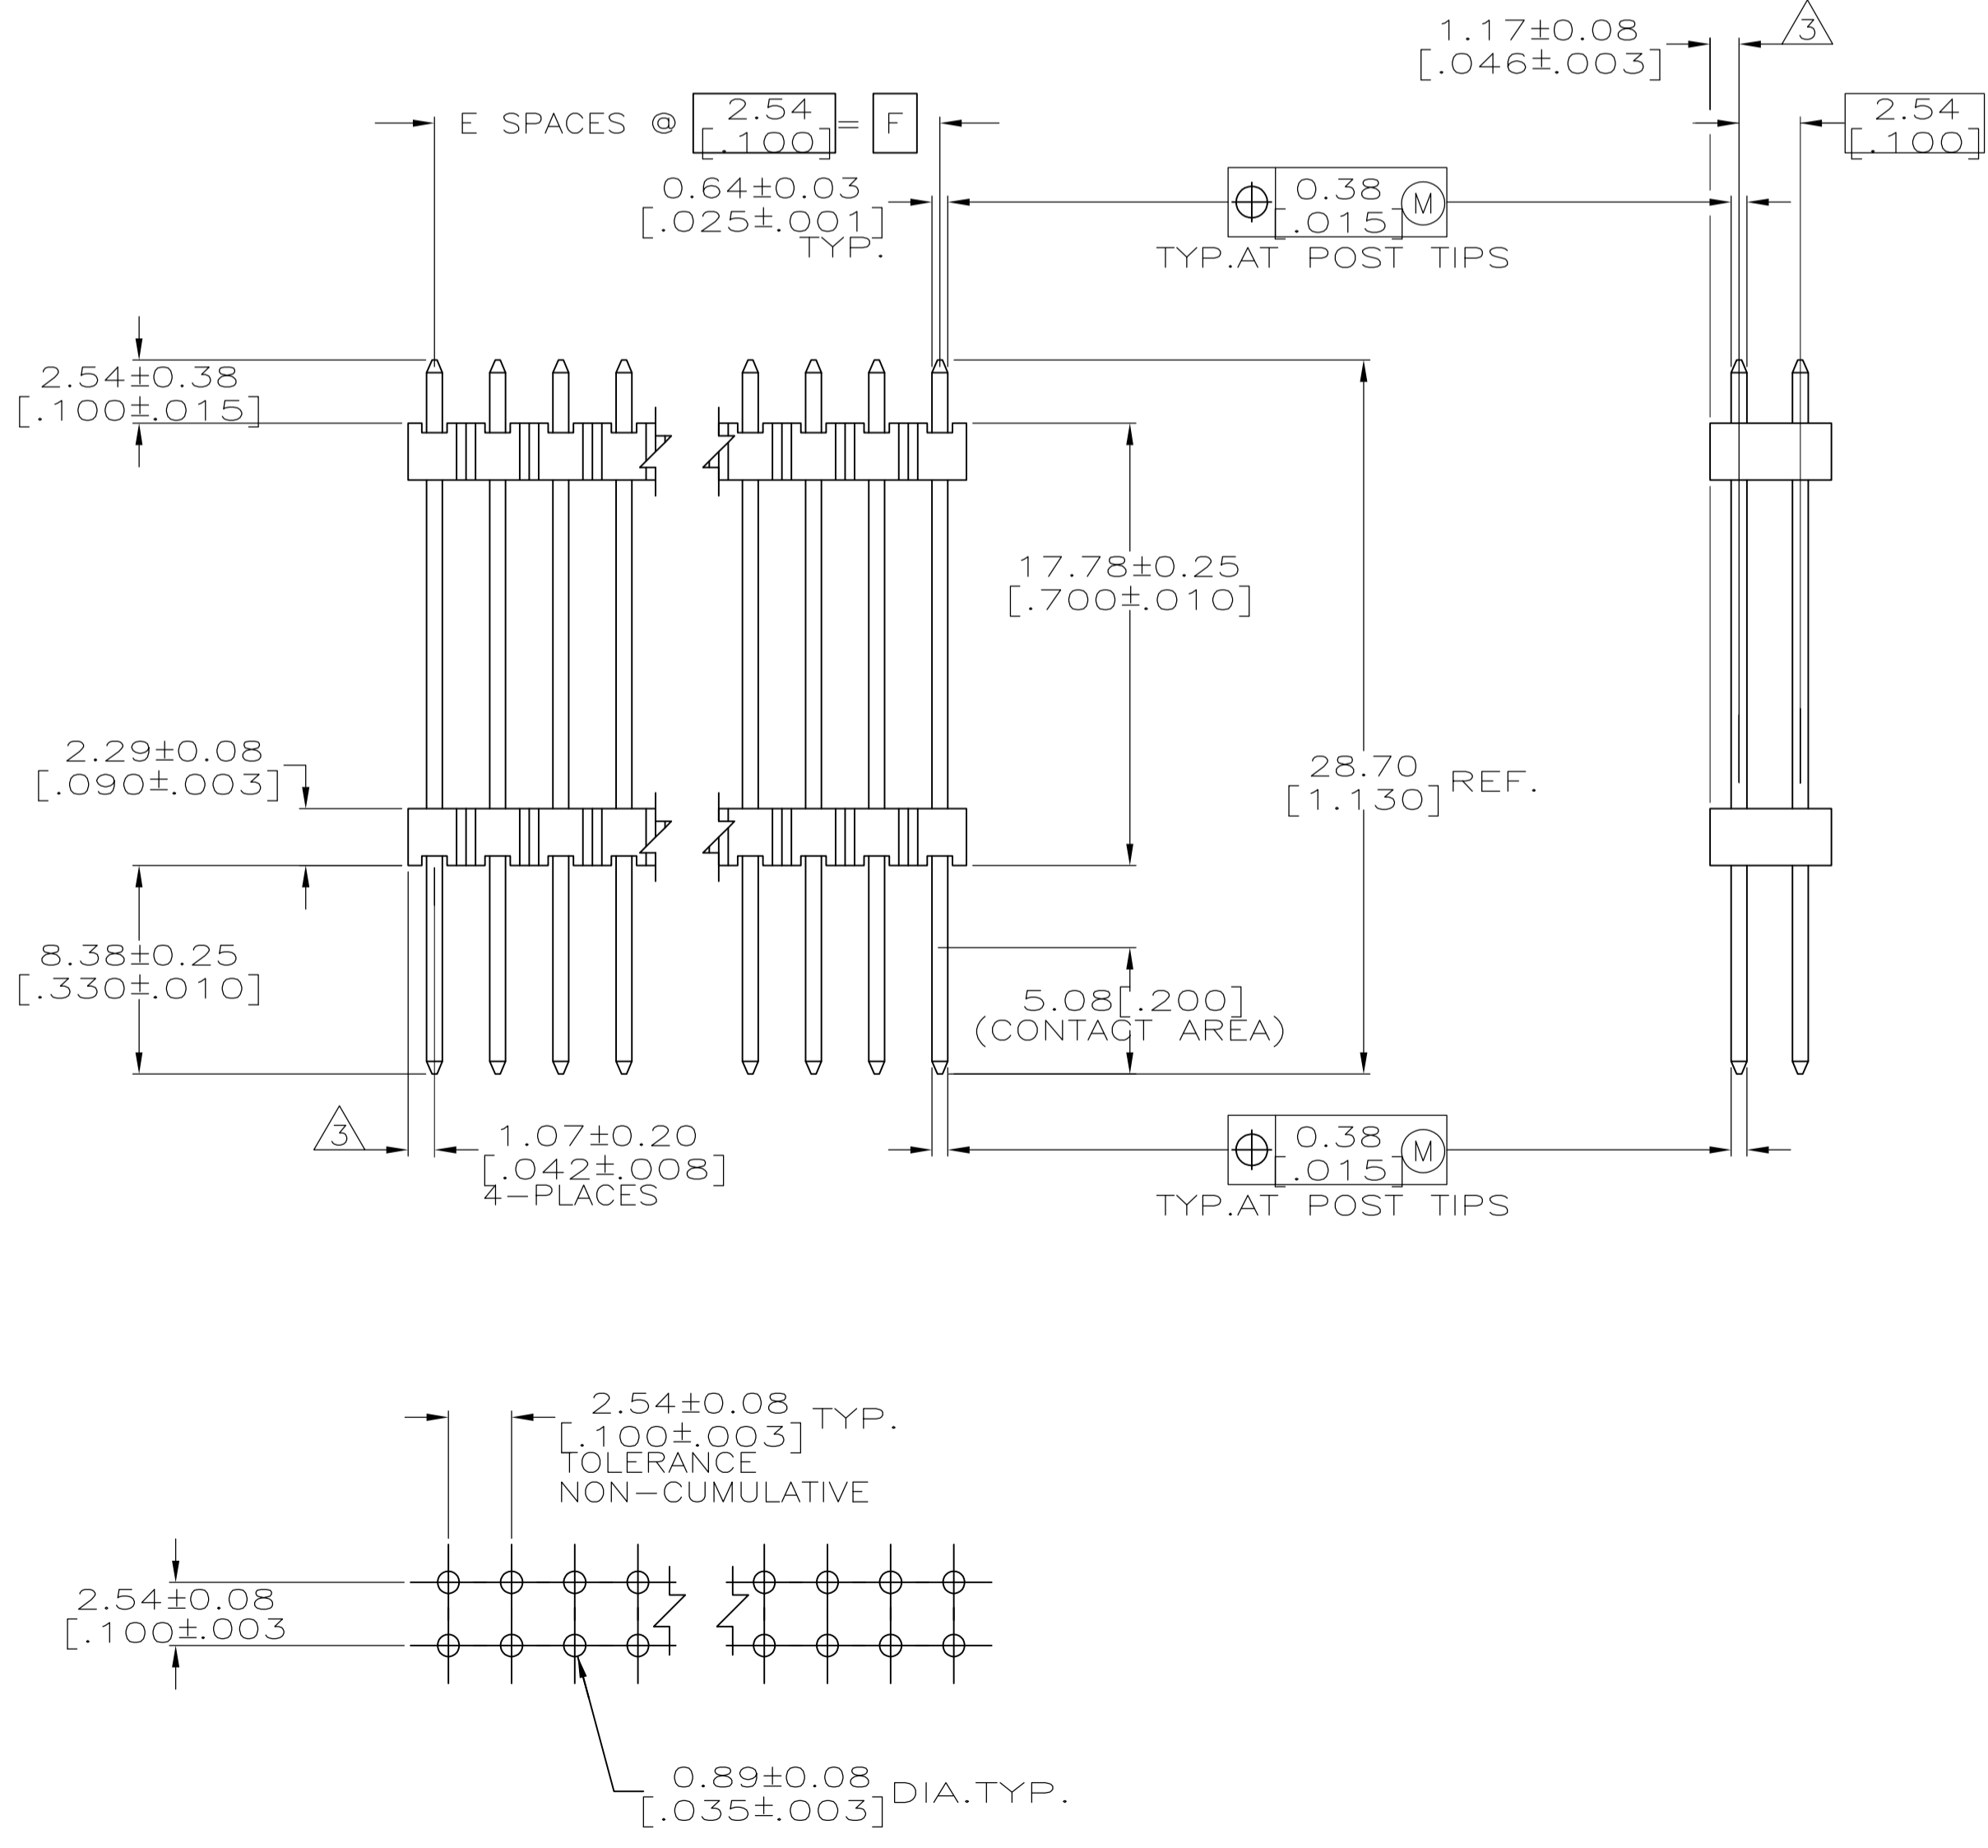


- ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
  - TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- ③ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ④ HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
- ⑤ FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- ⑥ FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

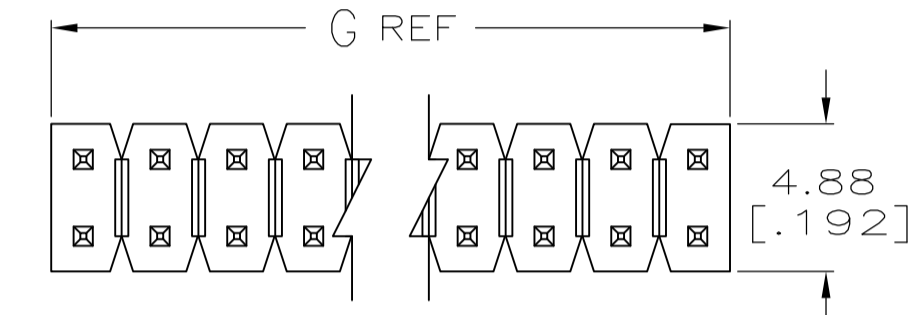

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
⑥	101.19 [3.984]	99.06 [3.900]	39	80	9-146500-0
⑥	98.65 [3.884]	96.52 [3.800]	38	78	8-146500-9
⑥	96.11 [3.784]	93.98 [3.700]	37	76	8-146500-8
⑥	93.57 [3.684]	91.44 [3.600]	36	74	8-146500-7
⑥	91.03 [3.584]	88.90 [3.500]	35	72	8-146500-6
⑥	88.49 [3.484]	86.36 [3.400]	34	70	8-146500-5
⑥	85.95 [3.384]	83.82 [3.300]	33	68	8-146500-4
⑥	83.41 [3.284]	81.28 [3.200]	32	66	8-146500-3
⑥	80.87 [3.184]	78.74 [3.100]	31	64	8-146500-2
⑥	78.33 [3.084]	76.20 [3.000]	30	62	8-146500-1
⑥	75.79 [2.984]	73.66 [2.900]	29	60	8-146500-0
⑥	73.25 [2.884]	71.12 [2.800]	28	58	7-146500-9
⑥	70.71 [2.784]	68.58 [2.700]	27	56	7-146500-8
⑥	68.17 [2.684]	66.04 [2.600]	26	54	7-146500-7
⑥	65.63 [2.584]	63.50 [2.500]	25	52	7-146500-6
⑥	63.09 [2.484]	60.96 [2.400]	24	50	7-146500-5
⑥	60.55 [2.384]	58.42 [2.300]	23	48	7-146500-4
⑥	58.01 [2.284]	55.88 [2.200]	22	46	7-146500-3
⑥	55.47 [2.184]	53.34 [2.100]	21	44	7-146500-2
⑥	52.93 [2.084]	50.80 [2.000]	20	42	7-146500-1
⑥	50.39 [1.984]	48.26 [1.900]	19	40	7-146500-0
⑥	47.85 [1.884]	45.72 [1.800]	18	38	6-146500-9
⑥	45.31 [1.784]	43.18 [1.700]	17	36	6-146500-8
⑥	42.77 [1.684]	40.64 [1.600]	16	34	6-146500-7
⑥	40.23 [1.584]	38.10 [1.500]	15	32	6-146500-6
⑥	37.69 [1.484]	35.56 [1.400]	14	30	6-146500-5
⑥	35.15 [1.384]	33.02 [1.300]	13	28	6-146500-4
⑥	32.61 [1.284]	30.48 [1.200]	12	26	6-146500-3
⑥	30.07 [1.184]	27.94 [1.100]	11	24	6-146500-2
⑥	27.53 [1.084]	25.40 [1.000]	10	22	6-146500-1
⑥	24.99 [.984]	22.86 [.900]	9	20	6-146500-0
⑥	22.45 [.884]	20.32 [.800]	8	18	5-146500-9
⑥	19.91 [.784]	17.78 [.700]	7	16	5-146500-8
⑥	17.37 [.684]	15.24 [.600]	6	14	5-146500-7
⑥	14.83 [.584]	12.70 [.500]	5	12	5-146500-6
⑥	12.29 [.484]	10.16 [.400]	4	10	5-146500-5
⑥	9.75 [.384]	7.62 [.300]	3	8	5-146500-4
⑥	7.21 [.284]	5.08 [.200]	2	6	5-146500-3
⑥	4.67 [.184]	2.54 [.100]	1	4	5-146500-2
⑥	2.13 [.084]	-	-	2	5-146500-1

PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER
⑤	101.19 [3.984]	99.06 [3.900]	39	80	4-146500-0
⑤	98.65 [3.884]	96.52 [3.800]	38	78	3-146500-9
⑤	96.11 [3.784]	93.98 [3.700]	37	76	3-146500-8
⑤	93.57 [3.684]	91.44 [3.600]	36	74	3-146500-7
⑤	91.03 [3.584]	88.90 [3.500]	35	72	3-146500-6
⑤	88.49 [3.484]	86.36 [3.400]	34	70	3-146500-5
⑤	85.95 [3.384]	83.82 [3.300]	33	68	3-146500-4
⑤	83.41 [3.284]	81.28 [3.200]	32	66	3-146500-3
⑤	80.87 [3.184]	78.74 [3.100]	31	64	3-146500-2
⑤	78.33 [3.084]	76.20 [3.000]	30	62	3-146500-1
⑤	75.79 [2.984]	73.66 [2.900]	29	60	3-146500-0
⑤	73.25 [2.884]	71.12 [2.800]	28	58	2-146500-9
⑤	70.71 [2.784]	68.58 [2.700]	27	56	2-146500-8
⑤	68.17 [2.684]	66.04 [2.600]	26	54	2-146500-7
⑤	65.63 [2.584]	63.50 [2.500]	25	52	2-146500-6
⑤	63.09 [2.484]	60.96 [2.400]	24	50	2-146500-5
⑤	60.55 [2.384]	58.42 [2.300]	23	48	2-146500-4
⑤	58.01 [2.284]	55.88 [2.200]	22	46	2-146500-3
⑤	55.47 [2.184]	53.34 [2.100]	21	44	2-146500-2
⑤	52.93 [2.084]	50.80 [2.000]	20	42	2-146500-1
⑤	50.39 [1.984]	48.26 [1.900]	19	40	2-146500-0
⑤	47.85 [1.884]	45.72 [1.800]	18	38	1-146500-9
⑤	45.31 [1.784]	43.18 [1.700]	17	36	1-146500-8
⑤	42.77 [1.684]	40.64 [1.600]	16	34	1-146500-7
⑤	40.23 [1.584]	38.10 [1.500]	15	32	1-146500-6
⑤	37.69 [1.484]	35.56 [1.400]	14	30	1-146500-5
⑤	35.15 [1.384]	33.02 [1.300]	13	28	1-146500-4
⑤	32.61 [1.284]	30.48 [1.200]	12	26	1-146500-3
⑤	30.07 [1.184]	27.94 [1.100]	11	24	1-146500-2
⑤	27.53 [1.084]	25.40 [1.000]	10	22	1-146500-1
⑤	24.99 [.984]	22.86 [.900]	9	20	1-146500-0
⑤	22.45 [.884]	20.32 [.800]	8	18	146500-9
⑤	19.91 [.784]	17.78 [.700]	7	16	146500-8
⑤	17.37 [.684]	15.24 [.600]	6	14	146500-7
⑤	14.83 [.584]	12.70 [.500]	5	12	146500-6
⑤	12.29 [.484]	10.16 [.400]	4	10	146500-5
⑤	9.75 [.384]	7.62 [.300]	3	8	146500-4
⑤	7.21 [.284]	5.08 [.200]	2	6	146500-3
⑤	4.67 [.184]	2.54 [.100]	1	4	146500-2
⑤	2.13 [.084]	-	-	2	146500-1

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	0 PLC ± -	1 PLC ± .05[.02]	2 PLC ± 0.12[.005]	3 PLC ± 0.012[.0005]	4 PLC ± -	ANGLES ± -
----------------	--	-----------	------------------	--------------------	----------------------	-----------	------------

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DRN: E. BRANDBERG 11-NOV-96	CHK: G. DUBNICZKI 11-NOV-96	APVD: G. DUBNICZKI 11-NOV-96	NAME: NAME
PRODUCT SPEC			
APPLICATION SPEC			
SIZE: A1	CAGE CODE: 00779	DRAWING NO: 146500	RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: 4:1	SHEET 1 of 1 REV A1

STE TE Connectivity

HEADER ASSEMBLY, MOD II, STACKING, DOUBLE ROW, .025 SQ.POST, UNSHROUDED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [TE Connectivity](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68645-018](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)  
[4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#)  
[FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)